



17.6 Cu. Ft. Counter-Depth French Door Refrigerator

French Door Refrigerator

Available Products: FRFG1723AV

Available Colors: Brushed Steel

Version: 08/22

Product Specifications

Refrigerator

| | |
|---------------------------------------|-------|
| Air Filter | Yes |
| Crisper Color | Clear |
| Deli Drawer | No |
| Door Bin Color | Clear |
| Interior Lighting | LED |
| Shelf Material | Glass |
| Water Filter | Yes |
| Number of Adjustable Gallon Door Bins | 2 |
| Number of Fixed 2 Liter Door Bins | 2 |
| Number of Fixed Gallon Door Bins | 2 |
| Total Number of Door Bins | 6 |
| Number of Adjustable Shelves | 2 |
| Number of Fixed Shelves | 1 |
| Number of Crispers | 2 |

Ice Maker

| | |
|--------------------|----------------|
| Ice Maker | Yes |
| Ice Maker Location | Frozen Section |
| Ice Shape | Square |

Exterior

| | |
|----------------------|------------------|
| Counter-Depth | Yes |
| Door Stops | Yes |
| Front Rollers | Yes |
| Rear Rollers | Yes |
| Water Inlet Location | Left Rear Bottom |
| Door Finish | Smooth |

General Specifications

| | |
|------------------|-------------------|
| Annual Energy | 484 kWh |
| Condenser Type | Dynamic |
| Cooling System | Single Evaporator |
| Leveling Legs | Yes |
| Prop 65 Label | Yes |
| Refrigerant Type | R-600A |
| Warranty - Labor | 1 Year |
| Warranty - Parts | 1 Year |

Safety Certifications and Approvals

| | |
|------------|-----|
| CSA Listed | Yes |
|------------|-----|

Freezer

| | |
|--------------------------|-------|
| Auto Close Drawer | Yes |
| Baskets / Bins Color | White |
| Drawer Color | Clear |
| Interior Lighting | None |
| Number of Baskets / Bins | 1 |
| Number of Drawers | 2 |

Controls


| | |
|------------------------|-----|
| Air Filter Indicator | Yes |
| Digital Display | Yes |
| Door Ajar Alarm | Yes |
| Ice Maker On/Off | Yes |
| Power Failure Alarm | No |
| Sabbath Mode | Yes |
| Water Filter Indicator | Yes |


Dimensions and Volume

| | |
|----------------------------|--------------|
| Height With Hinge | 67.9" |
| Height Without Hinge | 67.1" |
| Width | 31 3/10" |
| Width of Cabinet | 31 1/10" |
| Depth of Cabinet | 25 2/10" |
| Depth With Door | 29 1/10" |
| Depth With Door and Handle | 31" |
| Fresh Food Capacity | 12.2 Cu. Ft. |
| Freezer Capacity | 5.4 Cu. Ft. |
| Total Capacity | 17.6 Cu. Ft. |

Performance Certifications and Approvals

| | |
|-----------------------|-----|
| ENERGY STAR Certified | Yes |
|-----------------------|-----|

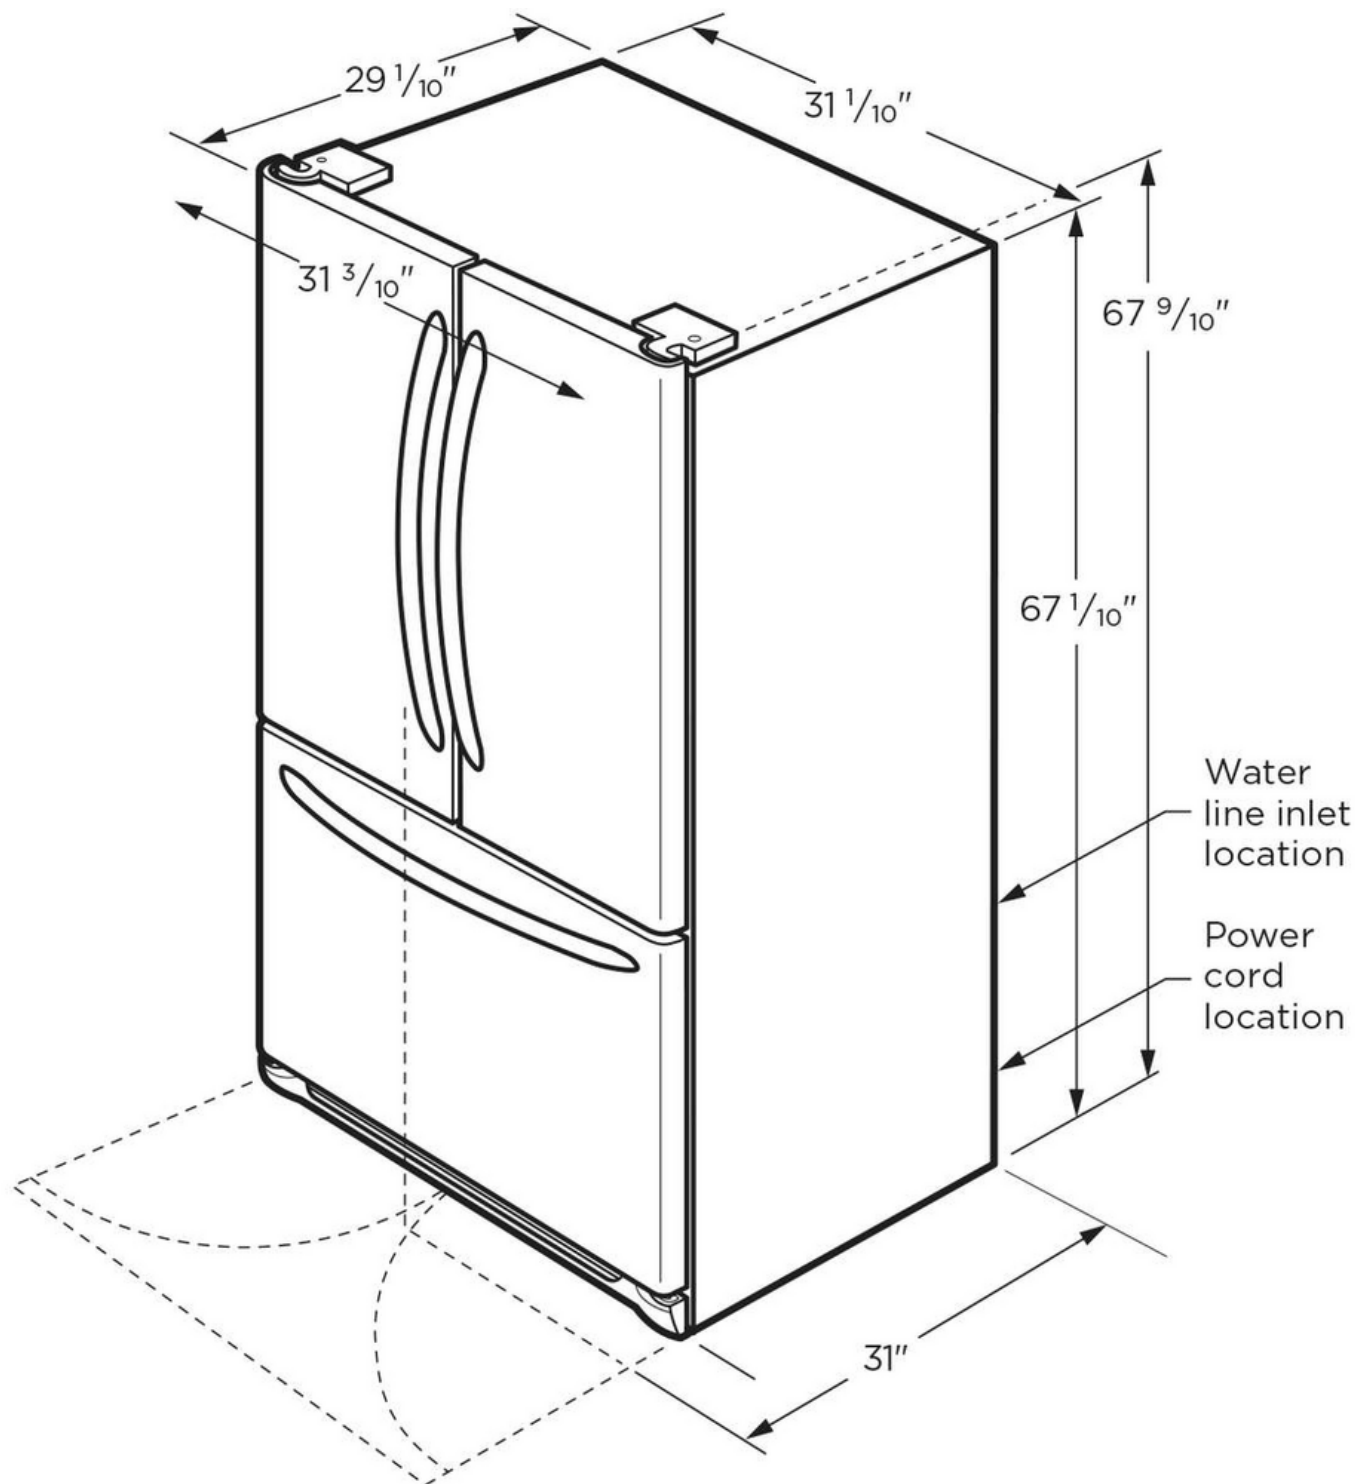Installation Diagram

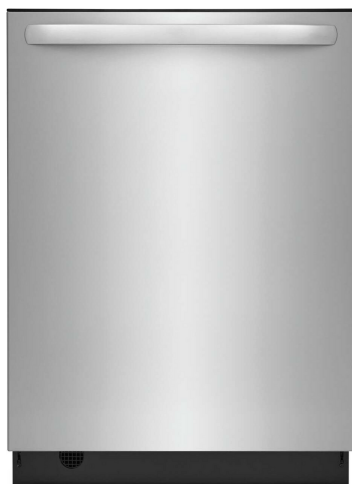

24" Built-In Dishwasher with EvenDry™

Dishwasher

Available Products: FDSH4501AS

Available Colors: Stainless Steel

Version: 11/22

Product Specifications

Dishwasher

| | |
|----------------------------------|-----------------|
| Automatic Temperature Control | Yes |
| Detergent Dispenser | Yes |
| Filter Material | Stainless Steel |
| Filter Trap | Removable |
| Filtered Water | 100 % |
| Hard Food Disposer or Filtration | Yes |
| Place Setting Capacity | 14 |
| Rinse Aid Dispenser | Yes |
| Smart Soil Sensor | Yes |
| Spray Arm | Blade |
| Tub Design | Tall Tub |
| Tub Material | Stainless Steel |
| Wash Levels | 5 |
| Wash System | Direct Feed |
| Water Pressure | 120 psi |

Dishwasher Options

| | |
|------------------|------------|
| Drying System | Fan Assist |
| Heated Dry | Yes |
| High Temperature | Yes |
| Start/Cancel | Yes |

Upper Rack

| | |
|-----------|-----|
| Cup Shelf | Yes |
|-----------|-----|

Controls

| | |
|-------------------|----|
| Delay Start Hours | 24 |
|-------------------|----|

Dimensions and Volume

| | |
|----------------------|---------|
| Minimum Height | 33 3/4" |
| Maximum Height | 35 3/4" |
| Width | 24" |
| Depth | 24" |
| Depth With Door Open | 50 1/4" |

Installation

| | |
|-------------------------|---|
| Number of Leveling Legs | 3 |
|-------------------------|---|

Performance Certifications and Approvals

| | |
|-----------------------|--------|
| CEE Tier | Tier 1 |
| ENERGY STAR Certified | Yes |

Dishwasher Cycles

| | |
|------------------|-----|
| China Crystal | Yes |
| Energy Saver | Yes |
| Heavy | Yes |
| Normal | Yes |
| Number of Cycles | 5 |
| Rinse Only | Yes |
| Upper Rack | Yes |

Lower Rack

| | |
|-----------------------------|--------|
| Number of Silverware Basket | 1 |
| Rack Type | Deluxe |

Third Level Rack

| | |
|------------------|-----|
| Third Level Rack | Yes |
|------------------|-----|

Exterior

| | |
|-----------|----------|
| Door Type | Standard |
|-----------|----------|

Electrical Specifications

| | |
|----------------|-------|
| Voltage Rating | 120 V |
|----------------|-------|



General Specifications

| | |
|------------------|---------|
| Sound Level | 49 dBA |
| Annual Energy | 270 kWh |
| Warranty - Labor | 1 Year |
| Warranty - Parts | 1 Year |

Safety Certifications and Approvals

| | |
|------------------------------|-----|
| UL Listed | Yes |
| Meets ASSE 1006 Requirements | Yes |
| NSF Certified | Yes |

Installation Diagram

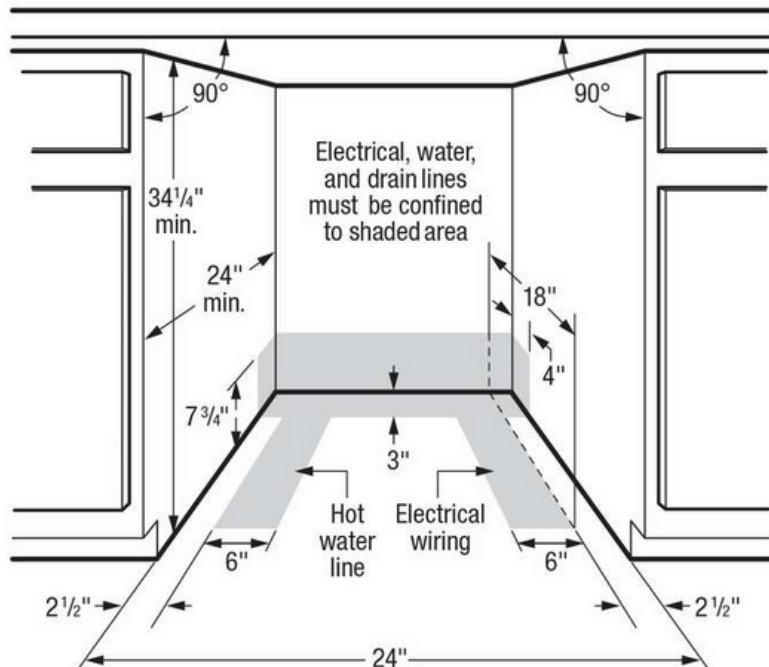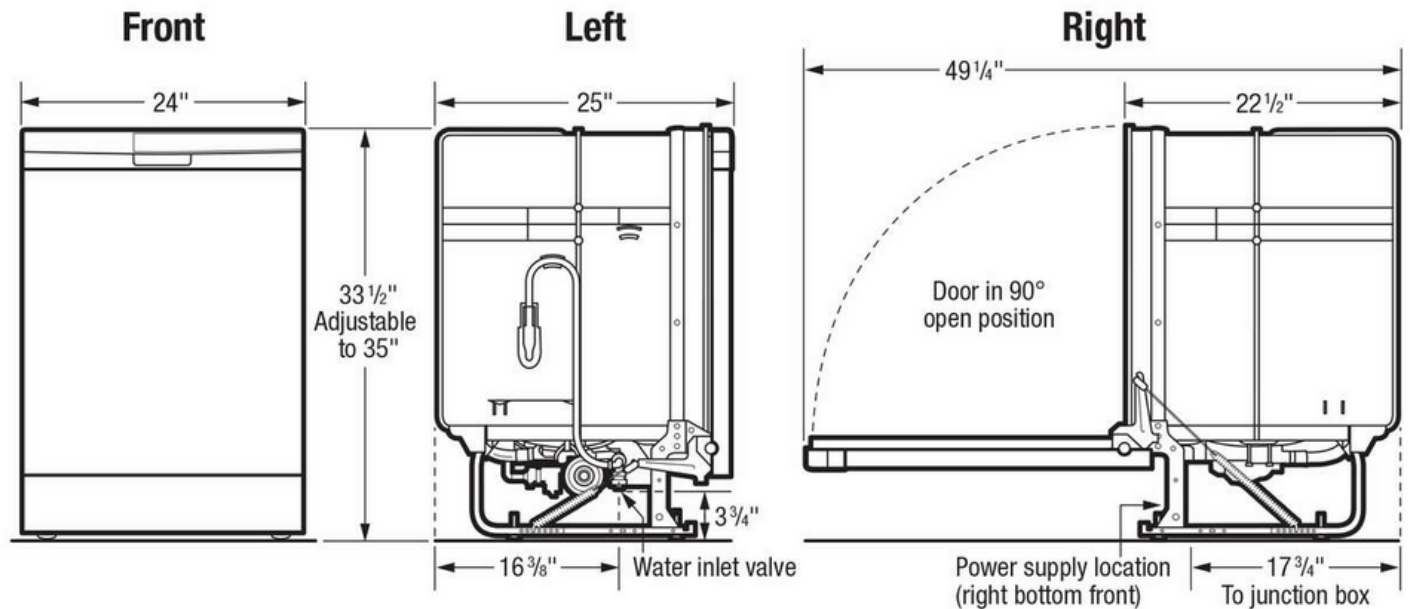



30" Front Control Electric Range

Electric Range

Available Products: FCFE3083AS

Available Colors: Stainless Steel

Version: 04/23

Product Specifications

Cooktop

| | |
|-----------------------------|--------|
| Cooking Surface Type | Smooth |
| Element On Indicator Light | Yes |
| Hot-Surface Indicator Light | Yes |
| Keep Warm Zone Light | Yes |

Cooking Controls

| | |
|---------------------|-----|
| Bake | Yes |
| Bake Time | Yes |
| Broil | Yes |
| Cancel | Yes |
| Clock | Yes |
| Convection Bake | Yes |
| Cook Time | Yes |
| Delay Clean | Yes |
| Delay Start | Yes |
| Door Lock | Yes |
| Keep Warm | Yes |
| Kitchen Timer | Yes |
| Lockout | Yes |
| Off | Yes |
| Oven Light | Yes |
| Oven Lock | Yes |
| Preheat | Yes |
| Self Clean | Yes |
| Set Clock | Yes |
| Start | Yes |
| Temperature Display | Yes |
| Timed Bake | Yes |
| Up / Down Arrow | Yes |
| Warm Zone | Yes |

Cooktop Performance

| | |
|--|-------------|
| Right Front Element Burner Size | 9" |
| Right Rear Element Burner Size | 6" |
| Left Front Element Burner Size (Small) | 6" |
| Left Front Element Burner Size (Large) | 9" |
| Left Rear Element Burner Size | 6" |
| Right Front Element Burner | 3,200 Watts |
| Right Rear Element Burner | 1,200 Watts |
| Left Front Element Burner (Small) | 1,400 Watts |
| Left Front Element Burner (Large) | 3,000 Watts |
| Left Rear Element Burner | 1,200 Watts |
| Center Rear Element Burner | 100 Watts |
| Keep Warm Burner Location | Center Rear |

Cooking Controls Function

| | |
|-------------------------------|-----|
| Program Fahrenheit or Celsius | Yes |
| Timed Cooking | Yes |

Drawer

| | |
|-------------|---------|
| Drawer Type | Storage |
|-------------|---------|

Display

| | |
|-------------------------|-------|
| Control Location | Front |
| Display Interface Color | White |
| Display Light Color | White |
| Display Type | LED |

Electrical Specifications

| | |
|--------------------------|---------|
| Amps @ 120 Volts | 10 Amps |
| Amps @ 240 Volts | 13 Amps |
| Minimum Circuit Required | 40 Amps |
| Voltage Rating | 240 V |

Certifications and Approvals

| | |
|---------------|-----|
| ADA Compliant | Yes |
|---------------|-----|

| | |
|----------------------------------|-----------------------------------|
| 30" Front Control Electric Range | Electric Range |
| Available Products: FCFE3083AS | Available Colors: Stainless Steel |
| Version: 04/23 | |

Oven

| | |
|---------------------------|----------------|
| Bake Element | 2,500 Watts |
| Bake Element Pass | 8 |
| Bake Element Type | Hidden |
| Bake System | Yes |
| Broil Element | 4,000 Watts |
| Broil Element Pass | 6 |
| Broil System | Yes |
| Cleaning System | Yes |
| Convection | Yes |
| Convection Type | Fan |
| Number of Convection Fans | 1 |
| Number of Rack Positions | 6 |
| Oven Interior Color | Midnight Black |
| Oven Light Quantity | 1 |
| Oven Light Type | Halogen |
| Oven Light Watts | 40 Watts |
| Rack Position Type | Embossed |
| Rack Type 1 | Flat |
| Rack Type 1 Quantity | 2 |

Controls

| | |
|--------------|-----|
| Control Lock | Yes |
| Sabbath Mode | No |

Dimensions and Volume

| | |
|--------------------------|-------------|
| Minimum Height | 35 3/8" |
| Maximum Height | 36 3/8" |
| Width | 30" |
| Depth | 26" |
| Depth With Door 90° Open | 47 5/16" |
| Depth With Handle | 28 1/2" |
| Oven Interior Height | 18 1/8" |
| Oven Interior Width | 25 3/16" |
| Oven Interior Depth | 19 7/8" |
| Oven Capacity | 5.3 Cu. Ft. |

General Specifications

| | |
|------------------|--------|
| Prop 65 Label | Yes |
| Warranty - Labor | 1 Year |
| Warranty - Parts | 1 Year |

Safety Certifications and Approvals

| | |
|-----------|-----|
| UL Listed | Yes |
| RoHS | Yes |

Installation Diagram

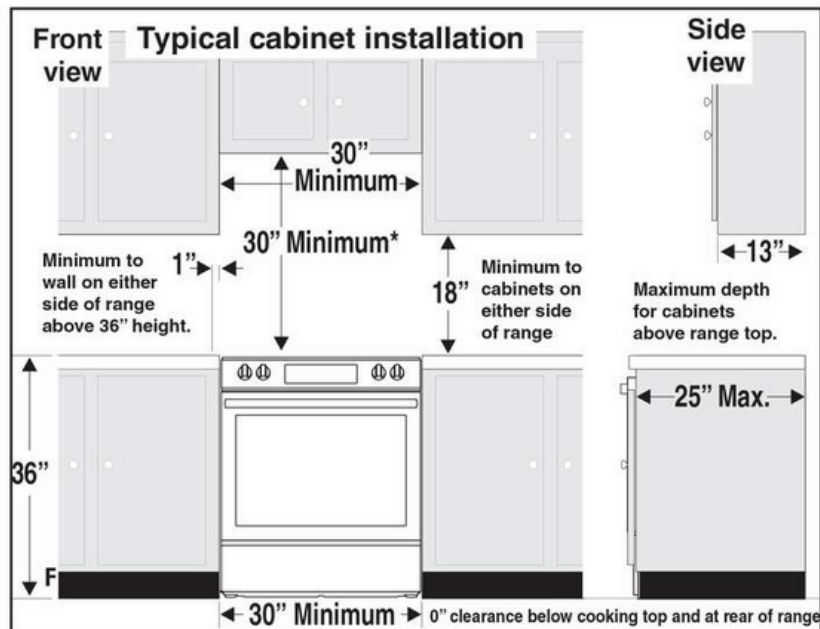


Fig. 1

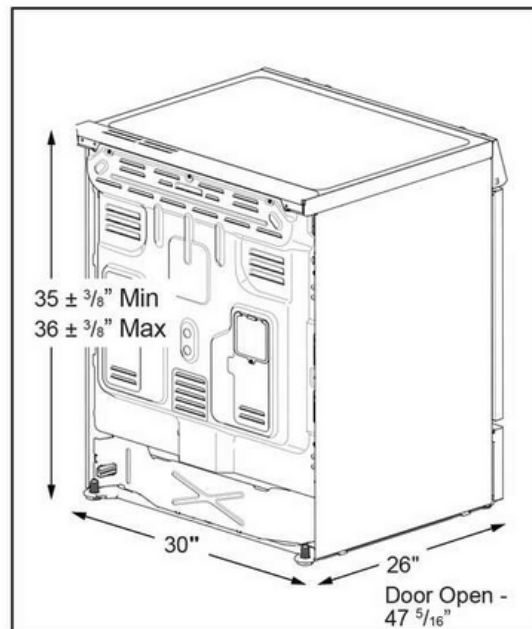


Fig. 2

*30" (762 mm) MINIMUM CLEARANCE BETWEEN THE TOP OF THE COOKING SURFACE AND THE BOTTOM OF AN UNPROTECTED WOOD OR METAL CABINET; OR 24" (610 mm) MINIMUM WHEN BOTTOM OF WOOD OR METAL CABINET IS PROTECTED BY NOT LESS THAN 1/4" (6 mm) FLAME RETARDANT MILLBOARD COVERED WITH NOT LESS THAN NO. 28 MSG SHEET STEEL, 0.015" (0.4 mm) STAINLESS STEEL, 0.024" (0.6 mm) ALUMINUM OR 0.020" (0.5 mm) COPPER. 0" (0 mm) CLEARANCE IS THE MINIMUM FOR THE REAR OF THE RANGE. FOLLOW ALL DIMENSION REQUIREMENTS PROVIDED ABOVE TO PREVENT PROPERTY DAMAGE, POTENTIAL FIRE HAZARD, AND INCORRECT COUNTERTOP AND CABINET CUTS.

TO ELIMINATE THE RISK OF BURNS OR FIRE BY REACHING OVER HEATED SURFACE UNITS, CABINET STORAGE SPACE LOCATED ABOVE THE SURFACE UNITS SHOULD BE AVOIDED. IF CABINET STORAGE IS TO BE PROVIDED, THE RISK CAN BE REDUCED BY INSTALLING A RANGE HOOD THAT PROJECTS HORIZONTALLY A MINIMUM OF 5" (127 mm) BEYOND THE BOTTOM OF THE CABINETS.

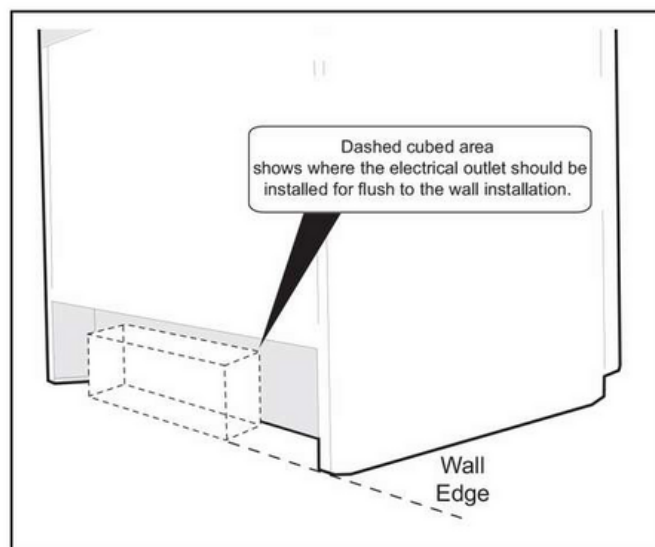


Fig. 3


1.8 Cu. Ft. Over-The-Range Microwave

Over-The-Range Microwave

Available Products: FMOW1852AS

Available Colors: Stainless Steel

Version: 07/22

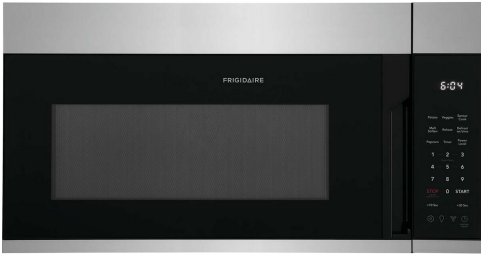

Product Specifications

Cooking Controls

| | |
|------------------------|-----|
| Defrost Time | Yes |
| Defrost Weight | Yes |
| Number of Power Levels | 10 |

Ventilation System

| | |
|-------------------------------|---------|
| Ductless Vent | Yes |
| Exhaust Fan Speeds | 2 |
| Minimum Air Flow Capacity | 105 CFM |
| Maximum Air Flow Capacity | 300 CFM |
| Charcoal Filter Included | No |
| Removable Grease Filter | Yes |
| Grease Filter Included | Yes |
| Grease Filter Dishwasher Safe | Yes |
| Grease Filter Quantity | 2 |
| Ducted Vent | Yes |

Microwave Control Features

| | |
|--------------|-----|
| + 10 Seconds | Yes |
| + 30 Seconds | Yes |
| Quick Start | Yes |

Display

| | |
|---------------------|------------------|
| Display Light Color | White |
| Display Type | Capacitive Touch |
| Control Location | Right |

Internal Specifications

| | |
|-------------------------|-----------|
| Interior Color | White |
| Interior Light Quantity | 1 |
| Interior Light Type | LED |
| Interior Light Wattage | 1.2 Watts |
| Turntable Diameter | 12 4/10" |
| Turntable Material | Glass |

Dimensions and Volume

| | |
|---------------------------|-------------|
| Height | 16 3/8" |
| Width | 29 7/8" |
| Depth | 15 3/4" |
| Depth With Door 90° Open | 39 3/8" |
| Microwave Interior Height | 10 9/16" |
| Microwave Interior Width | 21 3/32" |
| Microwave Interior Depth | 14 9/16" |
| Microwave Capacity | 1.8 Cu. Ft. |

Microwave Cooking

| | |
|----------------|-----|
| Auto Cook | Yes |
| Sensor Cooking | Yes |
| Beverage | Yes |
| Popcorn | Yes |
| Potato | Yes |
| Melt / Soften | Yes |
| Veggies | Yes |
| Reheat | Yes |

Controls

| | |
|--------------|-----|
| Control Lock | Yes |
|--------------|-----|

Additional Settings

| | |
|----------------------------|-----|
| Child Lock | Yes |
| Clock Display On / Off | Yes |
| Clock Settings | Yes |
| Demo On / Off | Yes |
| Setting Turntable On / Off | No |
| Setting Weight Lb / Kg | Yes |
| Surface Cooking Light | Yes |
| Timer On / Off | Yes |
| Vent Fan | Yes |

Exterior

| | |
|------------|-----------------|
| Door Swing | Side-Swing Door |
|------------|-----------------|

Surface Light System

| | |
|--------------------------|-----|
| Lighting Type | LED |
| Number of Lights | 1 |
| Number of Light Settings | 2 |

Electrical Specifications

| | |
|-----------------------|-------------|
| Amps @ 120 Volts | 13.5 Amps |
| Connected Load @ 120V | 1.55 kW |
| Voltage Rating | 120 V |
| Watts @ 120 Volts | 1,000 Watts |

General Specifications

| | |
|------------------|--------|
| Prop 65 Label | Yes |
| Warranty - Labor | 1 Year |
| Warranty - Parts | 1 Year |

| | |
|--------------------------------------|-----------------------------------|
| 1.8 Cu. Ft. Over-The-Range Microwave | Over-The-Range Microwave |
| Available Products: FMOW1852AS | Available Colors: Stainless Steel |
| Version: 07/22 | |


Installation

| | |
|----------------------------------|------------|
| Power Supply Connection Location | Top Center |
|----------------------------------|------------|

Safety Certifications and Approvals

| | |
|------------|-----|
| UL Listed | Yes |
| cUL Listed | Yes |

Installation Diagram

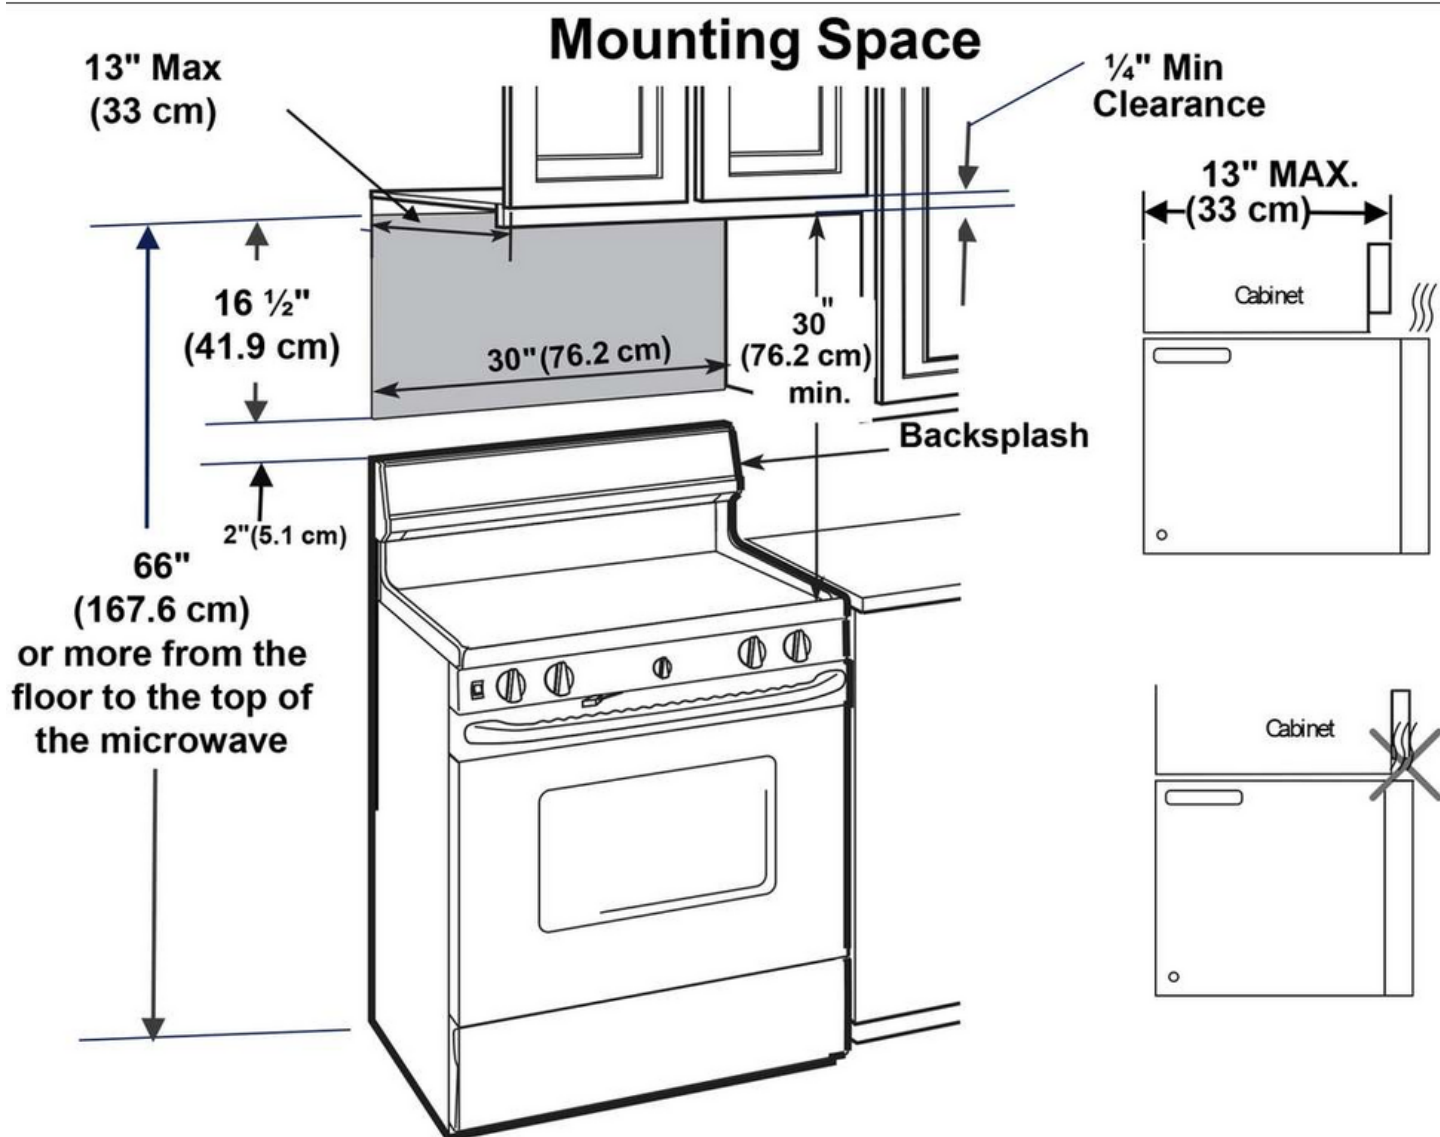

GFD14ESSNWW

GE® 4.3 Cu.Ft. Capacity Electric Dryer

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

ELECTRIC DRYER RATING


| | |
|------|------------------|
| 240V | 2800W, 12A, 60Hz |
|------|------------------|

CIRCUIT REQUIREMENTS: An individual, properly grounded branch circuit, protected by a 30-amp circuit breaker or a time-delay fuse, is required.


NOTE: Dryer wall outlet must be located within 36" of service cord entry and accessible when dryer is mounted in position.

INSTALLATION INFORMATION: For complete information, see installation instructions packed with your dryer.


Front View

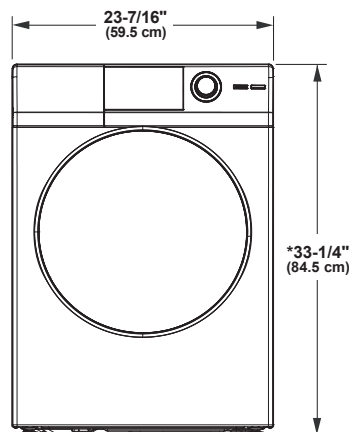


Side View

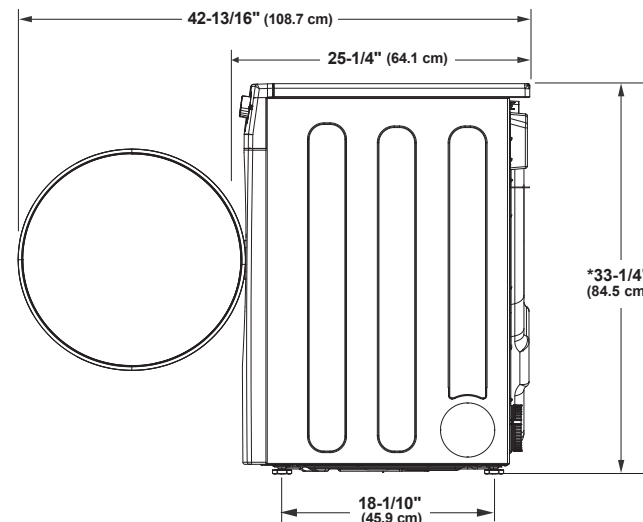

Back View

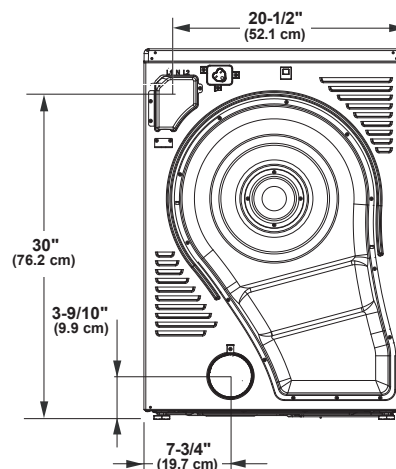

Side View

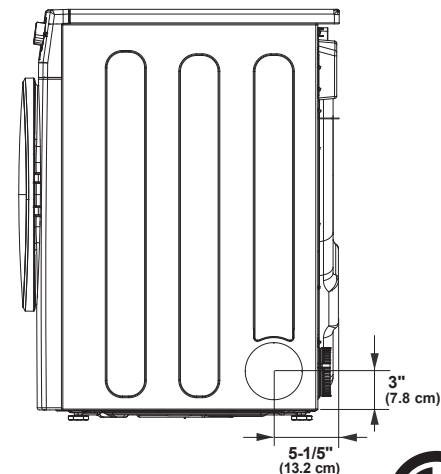

For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Specification Revised 3/19

GFD14ESSNWW

GE® 4.3 Cu.Ft. Capacity Electric Dryer

SPECIAL INSTALLATION REQUIREMENTS:

ALCOVE OR CLOSET INSTALLATION:

Stacking Kit - GFA24KITL (not included)

If your dryer is approved for installation in an alcove or closet, it will be stated on a label on the dryer back.

Minimum clearances between dryer cabinet and adjacent walls or other surfaces are: 1" left and right sides, 1" top, 3" front and rear.

Minimum clearances between washer cabinet and adjacent walls or other surfaces are: 1" left and right sides, 1" top, 1" front and rear.

Closet doors must be louvered or otherwise ventilated and must contain a minimum of 60 sq. in. of open area equally distributed. If this closet contains both a washer and a dryer, doors must contain a minimum of 120 sq. in. of open area equally distributed.

No other fuel-burning appliance shall be installed in the same closet with a gas dryer.

BATHROOM OR BEDROOM INSTALLATION:


The installation must conform with the local codes, or in the absence of local codes, with the National Electric Code and National Fuel Gas Code, ANSI Z223 for gas dryers.

MINIMUM CLEARANCE OTHER THAN ALCOVE OR CLOSET INSTALLATIONS:

Minimum clearances to combustible surfaces 0" both sides, 3" rear.

**FOR MORE INFORMATION ON VENTING KITS AND ACCESSORIES,
PLEASE CALL 1-800-GE-CARES.**

STACKED DIMENSIONS (IN INCHES)

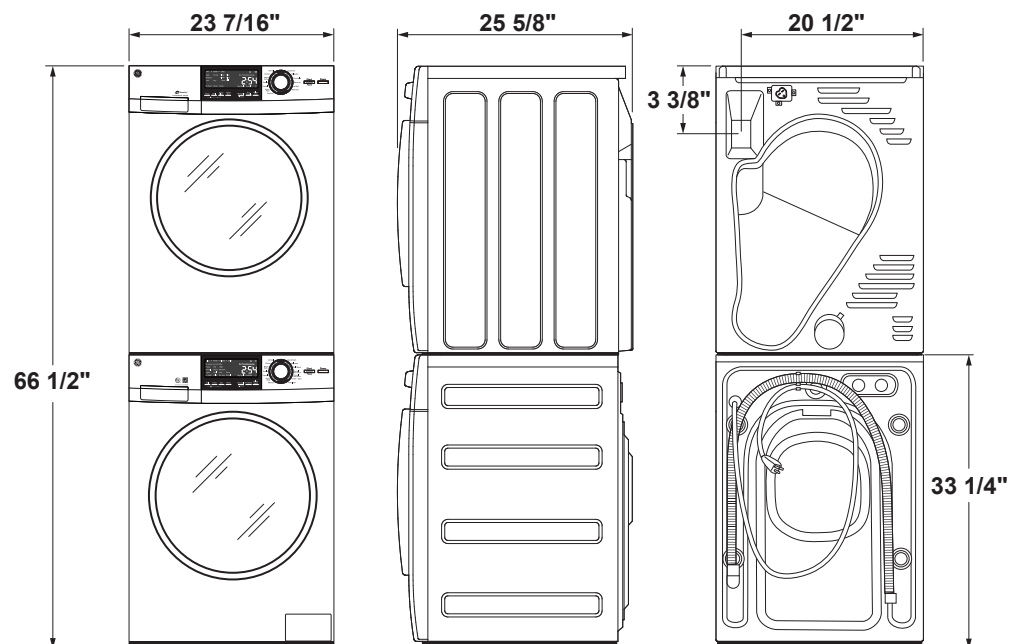

For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Specification Revised 3/19

GFD14ESSNWW

GE® 4.3 Cu.Ft. Capacity Electric Dryer

DRYER EXHAUSTING INFORMATION - METAL DUCT ONLY

FOR COMPLETE INFORMATION, SEE INSTALLATION INSTRUCTIONS PACKED WITH YOUR DRYER.

DUCTING MATERIALS: For best performance, this dryer should be vented with 4" diameter all rigid metal exhaust duct. If rigid metal duct cannot be used, then UL-listed flexible metal (semi-rigid) ducting can be used (Kit WX08X10077). In special installations, it may be necessary to connect the dryer to the house vent using a flexible metal (foil-type) duct. A UL-listed flexible metal (foil-type) duct may be used **ONLY** in installations where rigid metal or flexible metal (semi-rigid) ducting cannot be used **AND** where a 4" diameter can be maintained throughout the entire length of the transition duct. Please see installation instruction packed with your dryer for complete instructions when using flexible metal (foil type) ducting.

EXHAUST LENGTH CALCULATION:

1. Determine the number of 90° turns needed for your installation. If you exhaust to the side or bottom of dryer, add one turn.

A turn of 45° or less may be ignored. Two 45° turns within the duct length should be treated as a 90° elbow.

A turn over 45° should be treated as a 90° elbow.

Dryers **must** be exhausted to the outside.

CAUTION: For personal safety do not terminate exhaust into a chimney, under any enclosed house floor (crawl space), or into an attic, since the accumulated lint could create a fire hazard or moisture could cause damage. Never terminate the exhaust into a common duct or plenum with a kitchen exhaust, since the combination of lint and grease could create a fire hazard.

Exhaust ducts should be terminated in a dampered wall cap to prevent back drafts, bird nesting, etc. The wall cap must also be located at least 12" above the ground or any other obstruction with the opening pointed down.

FOR MORE INFORMATION ON VENTING KITS AND ACCESSORIES, PLEASE CALL 1-800-GE-CARES.

For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



| | | | |
|--|---------------------|---|----------------------------|
| | | BEST PERFORMANCE | |
| | | MAXIMUM LENGTH OF 4" DIA. RIGID METAL DUCT | |
| DOMESTIC DRYER MODELS | NUMBER OF 90° TURNS | EXHAUST HOOD TYPE | |
| | | A 4" OPENING | B 2-1/2" OPENING |
| 4.0 CU. FT. CAPACITY MODELS ALL ELECTRIC DRYERS | 0 | 90 FT. | 60 FT. |
| | 1 | 60 FT. | 45 FT. |
| | 2 | 45 FT. | 35 FT. |
| | 3 | 35 FT. | 25 FT. |

For every extra 90° elbow, reduce the allowable vent system length by 10 ft.

Two 45° elbows will be treated like one 90° elbow. For the side exhaust installations, add one 90° elbow to the chart. The total vent system length includes all the straight portions and elbows of the system (transition duct included).



GFD14ESSNWW


GE® 4.3 Cu.Ft. Capacity Electric Dryer

INSTALLATION INFORMATION

PLATFORM REQUIREMENTS TO MEET THE GUIDELINES FOR THE AMERICANS WITH DISABILITIES ACT (ADA)

FABRICATE A WOODEN PLATFORM FOLLOWING THESE REQUIRED INSTRUCTIONS FOR ADA COMPLIANCE:

1. The platform must raise the appliance at least 3", but not more than 7".
2. A hardwood fascia board that is 1" thick is required on any open side of the platform. The fascia board must have a lip height of 1" above the top to allow the consumer to open the front clean-out panel. Each fascia board must be attached with minimum of six 1/4" - 20 x 4" bolts with fender washers and locknuts on the backside.
3. The suggested maximum distance between lateral supports is 10".
4. Plywood top must be 3/4" thick.
5. The platform length can be dimensioned to fit one or multiple front loading compact laundry units.
6. The platform must be firmly secured, at least at two points, to an adjacent wall.
7. Place the front loading compact laundry unit(s) on the completed platform.
8. The front of any front loading compact laundry unit must be less than 10" from the front of the platform including the fascia board.
9. Follow the Installation Instructions shipped with your washer and/or dryer to complete the installation.

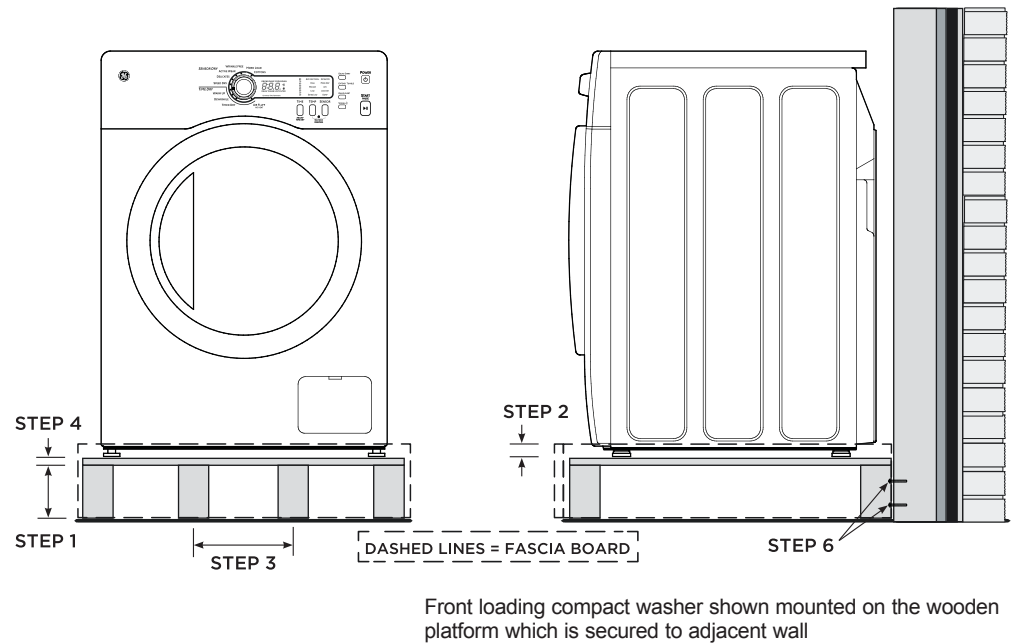

**QUESTIONS? CALL 800.GE.CARES (800.432.2737)
OR VISIT OUR WEB SITE AT: GEAPPLIANCES.COM**



For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Specification Revised 3/19

GFD14ESSNWW

GE® 4.3 Cu.Ft. Capacity Electric Dryer

FEATURES AND BENEFITS

HE Sensor Dry – Keep your clothes looking and feeling their best. Dual thermistors continually monitor temperature with a sensor bar that measures moisture to prevent over-drying

13 Dry Cycles – Delivers optimal drying results with a customized cycle for every load

WiFi Capable – Monitor performance and checks cycle status using your mobile device.
*Required ConnectPlus accessory part number PVX10W00Y0 sold separately.

Outlet for Washer – Provides an outlet for the washer for easy and flexible installation

My Cycle Settings – Dry clothes with the settings you prefer on any cycle, rather than the defaults, and store your settings for later use

ENERGY STAR® qualified – Meets or exceeds federal guidelines for energy efficiency for year-round energy and money savings

Delay start – Lets you do the laundry on your terms

Sanitize Cycle – Testing done by NSF shows that the Sanitize cycle reduces 96.7% of bacteria

Extended Tumble – Tumble clothes without heat to help prevent creasing and wrinkling


Quick Dry – Quickly dries items and small loads for families on the go

4 temperature selections – Pick the drying temperature you prefer for enhanced drying performance and fabric care

Cycle countdown display with LED indicators – Know exactly how much time is left for each cycle with bright display and lights

Stainless steel drum – Long-lasting, durable stainless steel resists rust and won't chip, peel or snag clothes

Model GFD14ESSNWW – White on white

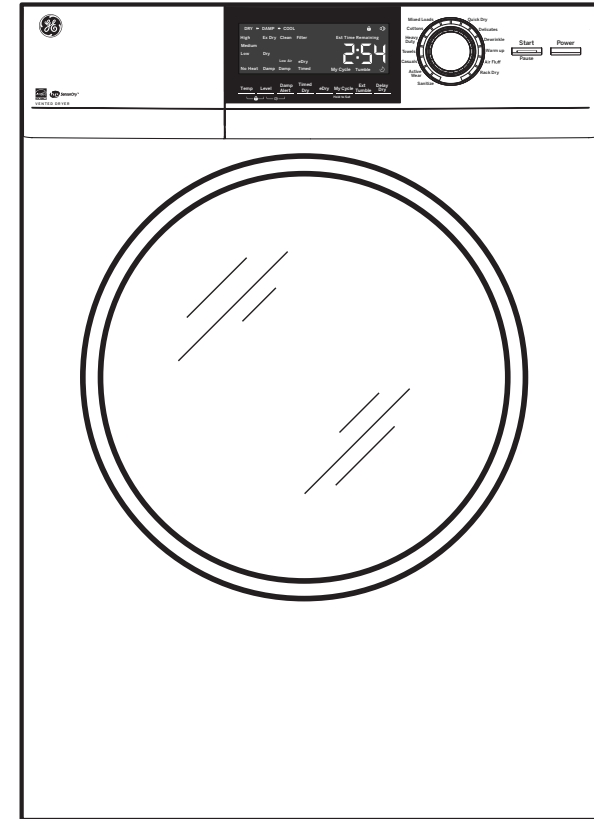


GE® 2.4 DOE Cu. Ft. Frontload Washer with Steam

GE® 2.4 DOE Cu. Ft. Frontload Washer with Steam

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

INSTALLATION INFORMATION: For complete information, see installation instructions packed with your washer.

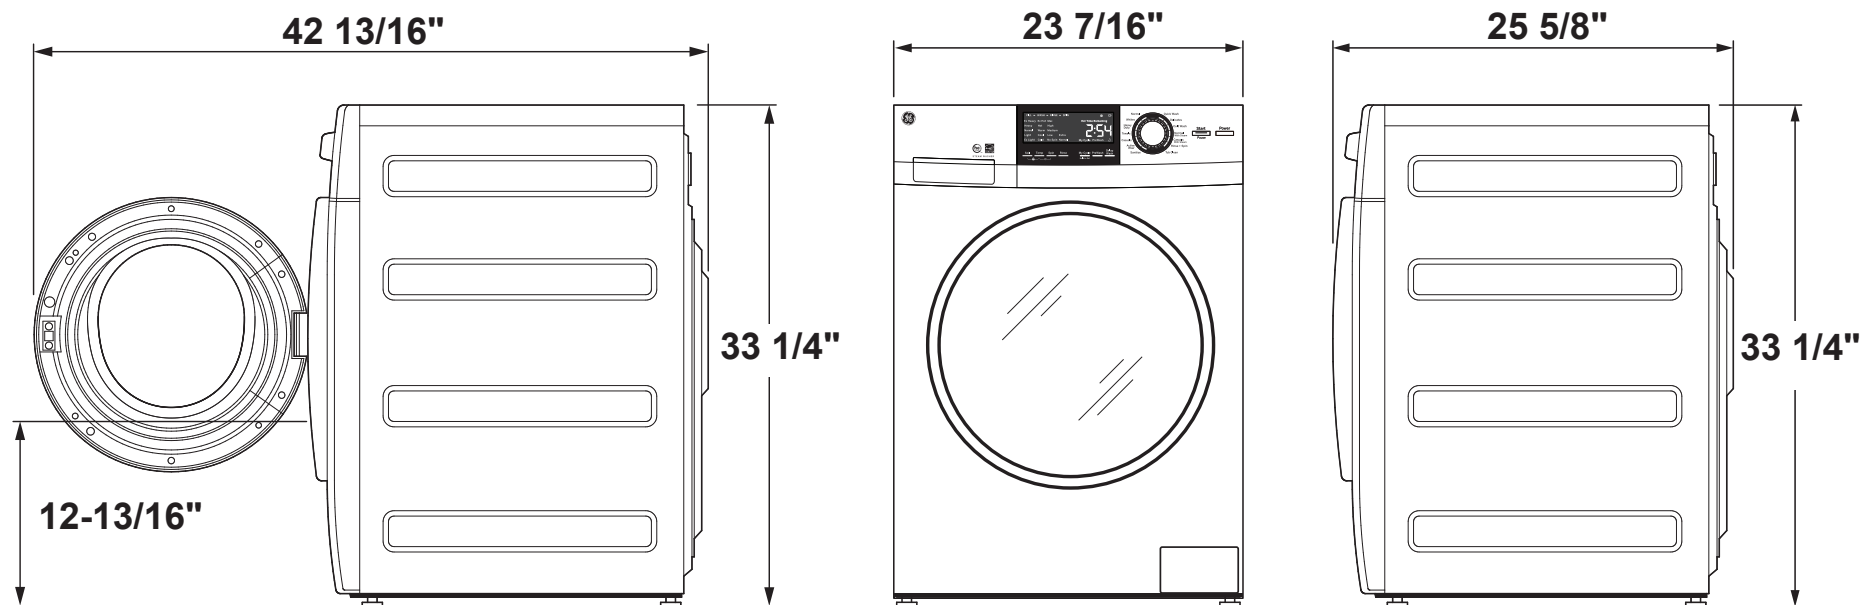

For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Specification Created 8/18

GE® 2.4 DOE Cu. Ft. Frontload Washer with Steam

GE® 2.4 DOE Cu. Ft. Frontload Washer with Steam

STACKED INSTALLATION:

- Kit for stacking dryer over washer is not included with the washer.

Order part no. GFA24KITL

ALCOVE OR CLOSET INSTALLATION:

- If your dryer is approved for installation in an alcove or closet, it will be stated on a label on the dryer back.

- The dryer MUST be exhausted to the outside with the exception of the condensing dryer.

- Minimum clearances between dryer cabinet and adjacent walls or other surfaces are: 1" left and right sides, 1" top, 3" front and rear.

- Minimum clearances between washer cabinet and adjacent walls or other surfaces are: 1" left and right sides, 1" top, 1" front and rear..

- Closet doors must be louvered or otherwise ventilated and must contain a minimum of 60 sq. in. of open area equally distributed. If this closet contains both a washer and a dryer, doors must contain a minimum of 120 sq. in. of open area equally distributed.

- No other fuel-burning appliance shall be installed in the same closet with a gas dryer.

BATHROOM OR BEDROOM INSTALLATION:

- The dryer MUST be exhausted to the outdoors with the exception of the condensing dryer.


- The installation must conform with the local codes, or in the absence of local codes, with the National Electric Code and National Fuel Gas Code, ANSI Z223 for gas dryers.

MINIMUM CLEARANCE OTHER THAN ALCOVE OR CLOSET INSTALLATIONS:

- Minimum clearances to combustible surfaces 0" both sides, 3" rear.

FOR MORE INFORMATION ON VENTING KITS AND ACCESSORIES, PLEASE CALL 1-800-GE-CARES.

STACKED DIMENSIONS (IN INCHES)

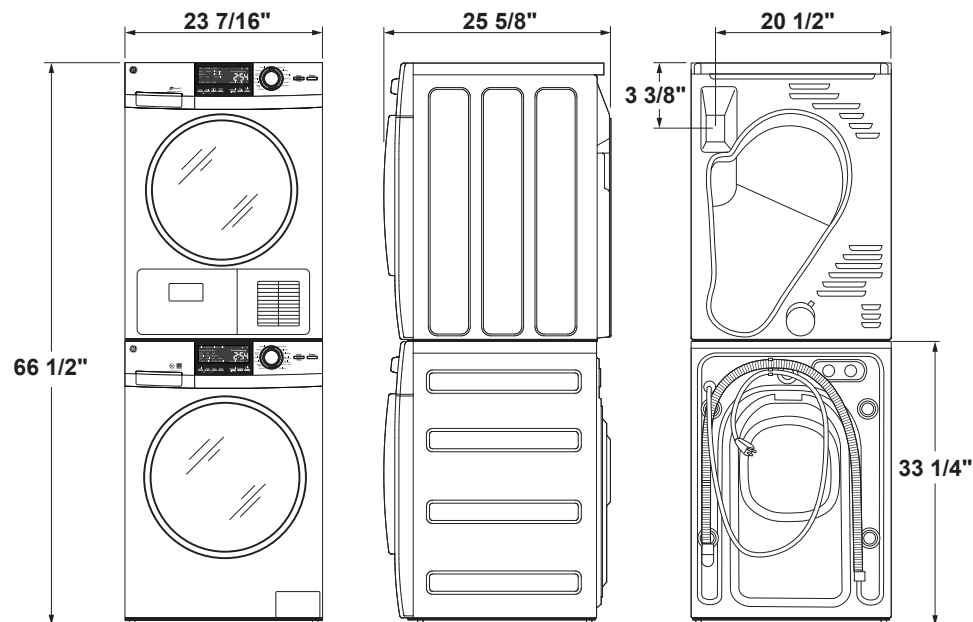

For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Specification Created 8/18

GE® 2.4 DOE Cu. Ft. Frontload Washer with Steam


GE® 2.4 DOE Cu. Ft. Frontload Washer with Steam

INSTALLATION INFORMATION

PLATFORM REQUIREMENTS TO MEET THE GUIDELINES FOR THE AMERICANS WITH DISABILITIES ACT (ADA)

FABRICATE A WOODEN PLATFORM FOLLOWING THESE REQUIRED INSTRUCTIONS FOR ADA COMPLIANCE:

1. The platform must raise the appliance at least 3", but not more than 7".
2. A hardwood fascia board that is 1" thick is required on any open side of the platform. The fascia board must have a lip height of 1" above the top to allow the consumer to open the front clean-out panel. Each fascia board must be attached with minimum of six 1/4" - 20 x 4" bolts with fender washers and locknuts on the backside.
3. The suggested maximum distance between lateral supports is 10".
4. Plywood top must be 3/4" thick.
5. The platform length can be dimensioned to fit one or multiple front loading compact laundry units.
6. The platform must be firmly secured, at least at two points, to an adjacent wall.
7. Place the front loading compact laundry unit(s) on the completed platform.
8. The front of any front loading compact laundry unit must be less than 10" from the front of the platform including the fascia board.
9. Follow the Installation Instructions shipped with your washer and/or dryer to complete the installation.

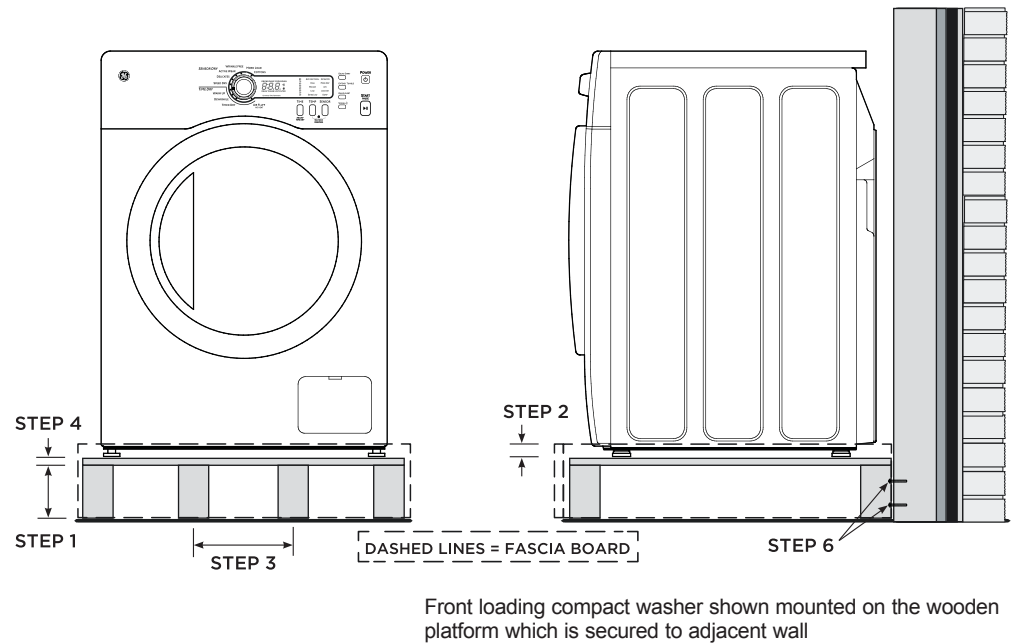

**QUESTIONS? CALL 800.GE.CARES (800.432.2737)
OR VISIT OUR WEB SITE AT: GEAPPLIANCES.COM**



For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.

GE® 2.4 DOE Cu. Ft. Frontload Washer with Steam

GE® 2.4 DOE Cu. Ft. Frontload Washer with Steam

FEATURES AND BENEFITS

Stainless steel basket – Long-lasting stainless steel finish resists rust and won't chip, peel or snag clothes

Steam – Penetrates deep into fabric fibers, loosening stains like tomato and grass, yet protects your fabrics

ENERGY STAR® qualified – Meets or exceeds federal guidelines for energy efficiency for year-round energy and money savings

Electronic touch controls – Enjoy easy operation and cleanability with streamlined controls

14 wash cycles – Multiple cycles are designed to specifically handle various fabrics and soils

1400 RPM spin speed – Fast spin speeds remove water efficiently and minimize dry time

Inlet fill hoses included

Quick Wash – Provides a quick wash for lightly soiled items that are needed in a hurry

Internal water heater – Increases wash temperature to reduce bacteria and provide better cleaning for the really tough stains

Model GFW148SSMWW – White on white

