



Modern

eminence of plain surfaces



Welcome

to one of the growing industry

We are a leading manufacturer and supplier of high quality Outdoor tiles in India. Our Outdoor tiles are inspired by real stone, providing a natural and stunning look for any wall surface. While Outdoor tiles were not in trend, Vicon Ceramic was quick to introduce this revolutionary product.

600+

SATISFIED DEALERS

15

YEARS OF EXPERIENCE


2,500+

SUCCESSFUL PROJECTS

98%

RETENTION RATE

INSPIRATION

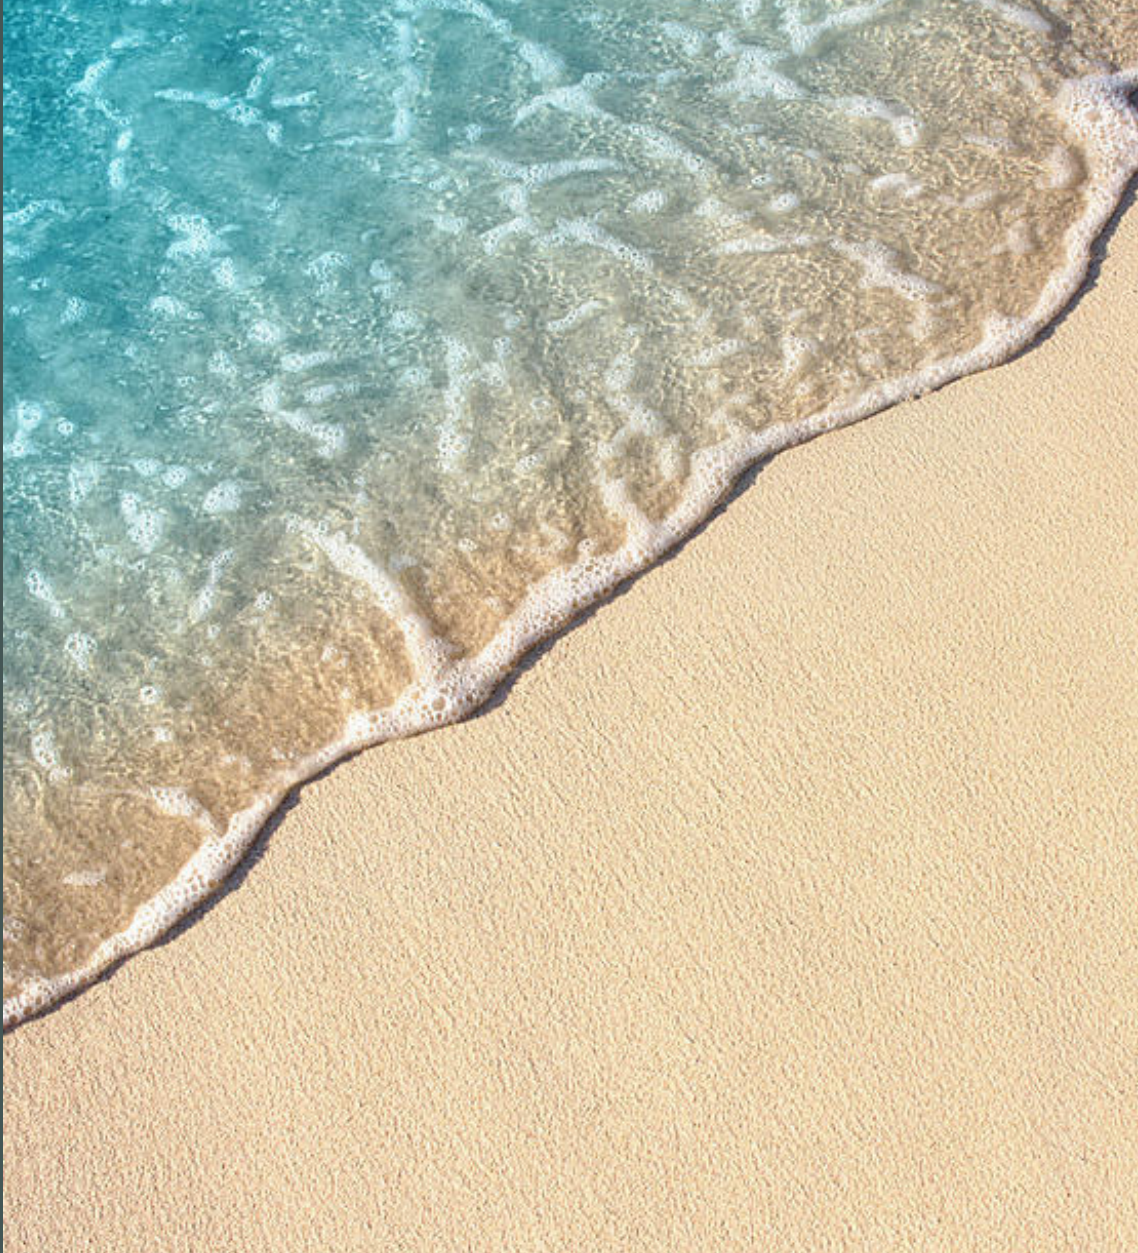

For architecture and design, resins are an excellent planning and style source, ideal for creating grand, striking effects; they're equally suitable for any spaces, offering versatility in terms of composition and material.



Define Your Space
Luxury



300x
300mm

Plain
Finish

▼ 10mm
▲ Thickness



300 x
300mm

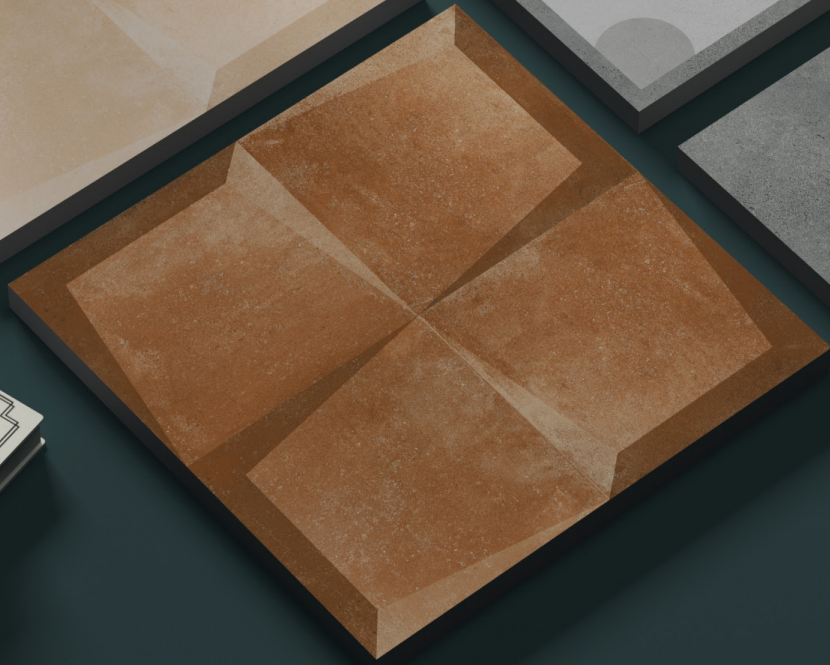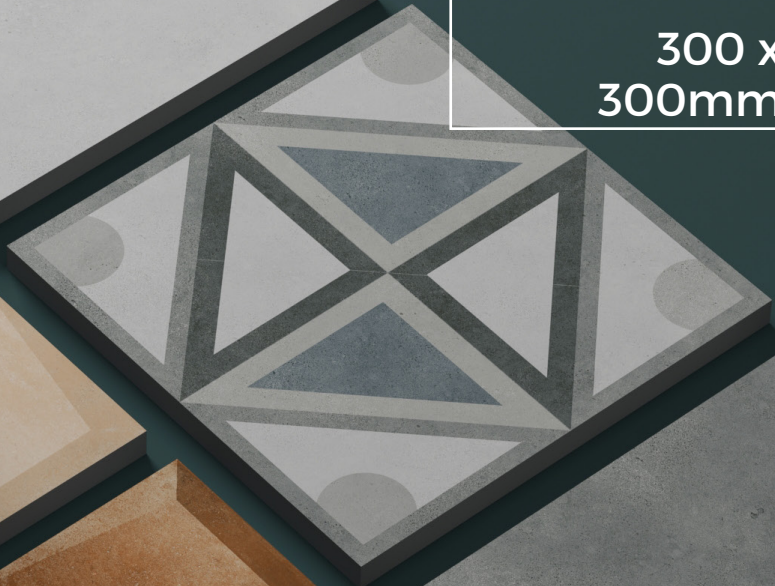



**SOLID
BODY**



**EASY TO
MAINTAIN**



**ECOLOGICAL &
SUSTAINABLE**



**ZERO
MAINTENANCE**



**HIGH
STRENGTH**



**LOW WATER
ABSORPTION**



**IMPACT
RESISTANCE**



APPLICATION



RESIDENTIAL AREAS



URBAN AREAS



TERRACE & PATIOS



COMMERCIAL AREAS



SWIMMING POOLS



GARDENS




HIGH TRAFFIC AREAS




HEALTH CENTERS



RESTORANT

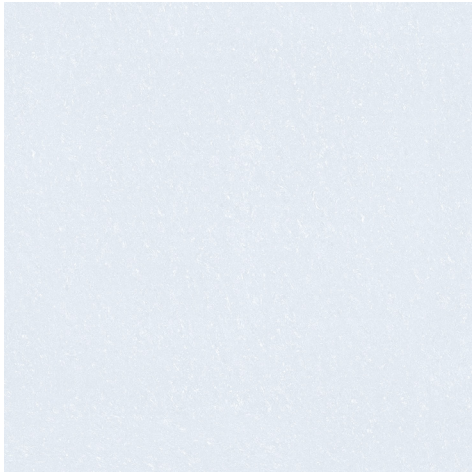

ALPHA BLUE LT

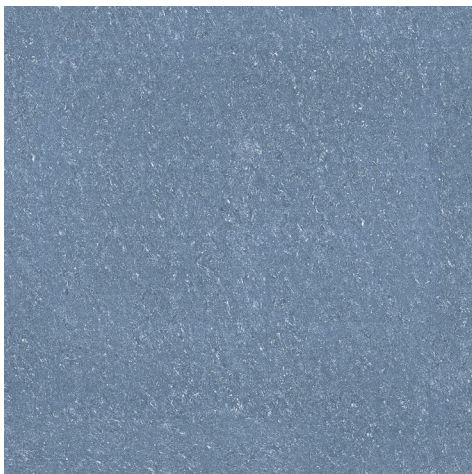

ALPHA BLUE DK

Finish : **Plain**
Size : 300 x 300mm



Anti-Slip



High Strength



Random Design



Floor Purpose







ALPHA LT



ARIES FLOWER



ALPHA DK



Anti-Slip



High Strength



Random Design




Floor Purpose




LUXOR

RANDOM






JUPITER LT

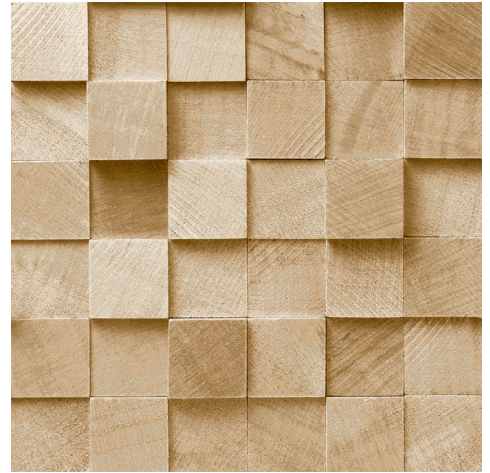

MIST BEIGE

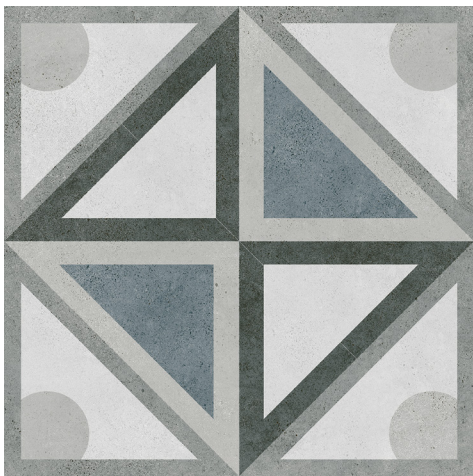

JUPITER HL



JUPITER DK



Anti-Slip




High Strength



Random Design




Floor Purpose





MARTE LT

Finish : **Plain**
Size : 300 x 300mm

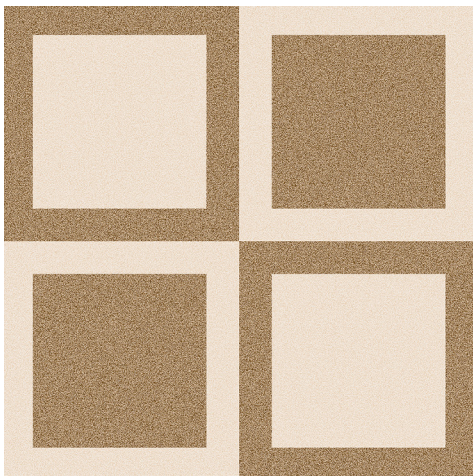

MARTE HL



MARTE DK



Anti-Slip



High Strength



Random Design




Floor Purpose







SATURNO LT

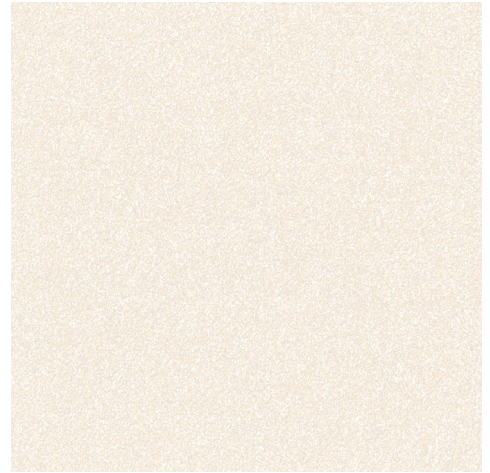

SIRIUS LT



SATURNO DK



SIRIUS DK



Anti-Slip



High Strength




Random Design



Floor Purpose

Finish : **Plain**






SIRIUS BAND LT



URBINO LT



SIRIUS BAND DK

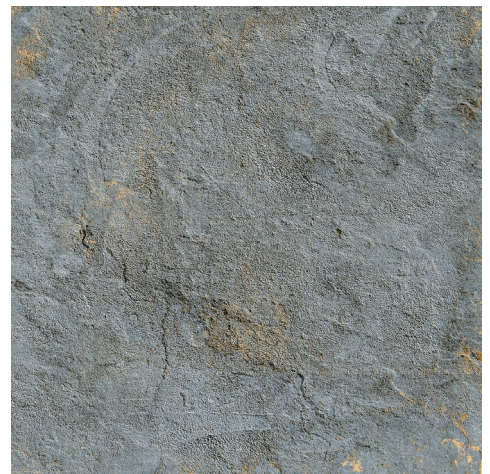

URBINO DK



Anti-Slip



High Strength




Random Design



Floor Purpose

Finish : **Plain**



300 x
300mm



UTICA LT



UTICA DK

Finish : **Plain**
Size : 300 x 300mm



Anti-Slip



High Strength




Random Design




Floor Purpose






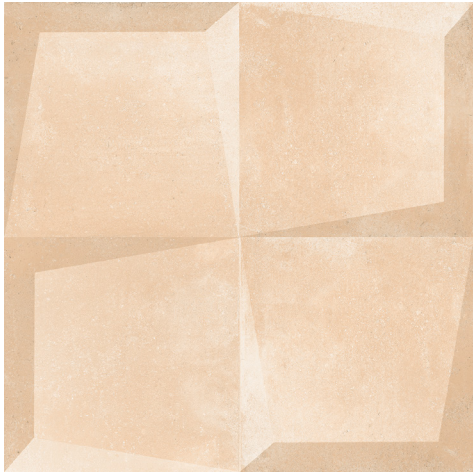


TEBAS BROWN LT

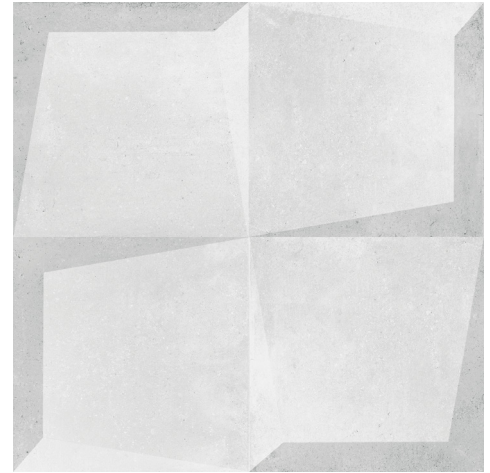

TEBAS BROWN LT

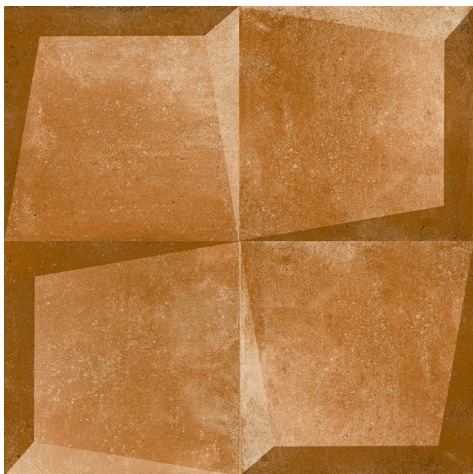

TEBAS BROWN DK

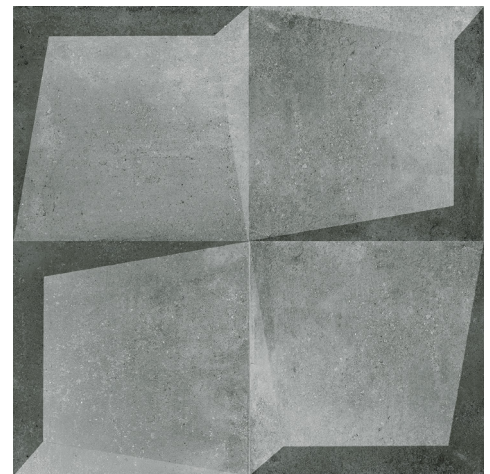

TEBAS BROWN DK



Anti-Slip



High Strength




Random Design



Floor Purpose

Finish : **Plain**





VERNO LT



VERNO DK

Finish : **Plain**
Size : 300 x 300mm



Anti-Slip



High Strength



Random Design



Floor Purpose





PACKAGING DETAIL FOR DIGITAL TILES - 300X300MM

Nominal Size	Thickness	Avg. Wt. Per Box (Kg.)	No. of Tiles Per Box	Coverage Area Per Box
300x300MM Digital	10mm	16.0 kg	8	0.72 sq meter / 7.75sq feet

TECHNICAL SPECIFICATION FOR DIGITAL TILES - 300X300MM

Characteristics	Requirement as per ISO 13006 ≤ 0.5% Group B I a	Requirement as per IS 4457 ≤ 0.5%	Our value for 300x300mm Durastone	Test Method
Dimension & Surface Quality				
Length & Width	± 0.3%	± 0.5%	± 0.10%	ISO 10545-Part 2/ IS 4457 Annex B
Thickness	± 5.0%	± 5.0%	± 4.0%	
Straightness of Side	± 0.30%	± 0.20%	± 0.10%	
Rectengularity	± 0.30%	± 0.20%	± 0.10%	
Surface Flatness				
Center curvature (%) (max.Deviation)	± 0.40%	± 0.30%	± 0.2%	
Edge curvature (%) (max.Deviation)	± 0.40%	± 0.30%	± 0.2%	
Corner warpage (%) (max.Deviation)	± 0.40%	± 0.30%	± 0.2%	
Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
Physical Properties				
Water Absorption	Av ≤ 0.5 %, Individual 0.6% max	Av. 0.5 %, Individual 0.6% max	Av < 0.5 %	ISO 10545-Part 3/ IS 4457 Annex C
Modulus of Rupture [N/mm ²]	Av 35, Individual 32 min	Av 35, Individual 32 min	Av 38	ISO 10545-Part 4/ IS 4457 Annex D
Breaking Strength in N	1300	1300	Min, 1800	
Moisture Expansion in mm/m	Test Method Available	Not Available	Max,0.02	ISO-10545-Part 10
Scratch Hardness of surface (Mohs)	N/A	Not Available	Min-6	IS 13630 Part-13
Resistance to Surface Abrasion (Class I to V)	Abrasion Class & Cycle passed	Not Available	Class v	ISO 10545 -Part 6/ IS 4457 Annex E
Coefficient of linear thermal expansion from embiant temperature to 100° C	Test Method Available	Not Available	Max 6 X 10 ⁻⁶ K ⁻¹ max	ISO 10545-Part 8
Thermal Shock Resistance	Required	Not Available	10 cycle passed	ISO-10545-Part 9
Crazing Resistance	N/A	Not Available	4 cycle passed	ISO 10545-Part 11
Impact Resistance as Co-efficient of Restitution (COR)	Test Method Available	Not Available	0.75-0.90	ISO 10545-Part 5
Frost Resistance	Required	Not Available	100 Cycle Passed	ISO 10545-Part 12
Resistance to Concentrated HNO ₃ & H ₂ SO ₄	Not Available	Loss of mass not excee 1.5%	Loss Less Than 1%	IS 4457: 2007 ANNEX G
Chemical Resistance (glazed Tiles)				
Stain Resistance	Min Class 3	Min Class 1	Min Class 1	ISO 10545-Part 14
Resistance to household chemicals	Min Class GB	Min Class AA	Min Class AA	ISO 10545-Part 13/ IS 4457 Annex F
Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Declared Value ^f	Min Class AA	Min Class AA	

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see the physical sample before placing the order. " Technical Specification" for packaging tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixed. Complaints will not be entertained for Borders, Highlighters & Motifs.

