



US009062873B2

(12) **United States Patent**
Auyeung

(10) **Patent No.:** **US 9,062,873 B2**
(45) **Date of Patent:** **Jun. 23, 2015**

(54) **STRUCTURE FOR PROTECTING LED LIGHT SOURCE FROM MOISTURE**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(71) Applicant: **ULTRAVISION HOLDINGS, LLC**,
Dallas, TX (US)
(72) Inventor: **David Siucheong Auyeung**, Carrollton,
TX (US)
(73) Assignee: **Ultravision Technologies, LLC**, Dallas,
TX (US)

4,235,285	A	11/1980	Johnson et al.
4,679,118	A	7/1987	Johnson et al.
5,036,248	A	7/1991	McEwan et al.
5,083,194	A	1/1992	Bartilson
5,329,426	A	7/1994	Villani
5,384,940	A	1/1995	Soule et al.
5,818,640	A	10/1998	Watanabe et al.
5,857,767	A	1/1999	Hochstein

(Continued)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

FOREIGN PATENT DOCUMENTS

(21) Appl. No.: **13/836,710**

EP	2553331	A1	2/2013
EP	2622267	A1	8/2013
WO	2006126123	A1	11/2006

(22) Filed: **Mar. 15, 2013**

OTHER PUBLICATIONS

(65) **Prior Publication Data**

US 2014/0029274 A1 Jan. 30, 2014

Lee, S., "How to Select a Heat Sink," <http://www.electronics-cooling.com/1995/06/how-to-select-a-heat-sink/>, Jun. 1, 1995, pp. 1-10.

(Continued)

Related U.S. Application Data

(60) Provisional application No. 61/677,352, filed on Jul. 30, 2012.

Primary Examiner — Tracie Y Green

(74) *Attorney, Agent, or Firm* — Slater & Matsil, L.L.P.

(51) **Int. Cl.**

F21K 99/00 (2010.01)

F21V 31/00 (2006.01)

G09F 9/33 (2006.01)

(52) **U.S. Cl.**

CPC . **F21V 31/00** (2013.01); **F21K 9/30** (2013.01);
G09F 9/33 (2013.01)

(58) **Field of Classification Search**


CPC F21Y 2111/001; F21Y 2105/005;
F21Y 2111/004; F21V 29/004

USPC 362/382, 234, 249.02
See application file for complete search history.

(57) **ABSTRACT**

A light emitting diode (LED) lighting assembly is disclosed. A first panel having a front surface with a protrusion extending therefrom is provided. A second panel is coupled to the first panel directly below the protrusion, wherein the second panel includes at least one LED. A third substantially transparent panel having a cavity formed therein is provided, wherein the cavity is sized to fit over the second panel, wherein the third panel includes a beveled edge that abuts the first panel at a joint directly below the protrusion, and wherein the protrusion and beveled edge are configured to direct moisture away from the joint.

13 Claims, 13 Drawing Sheets

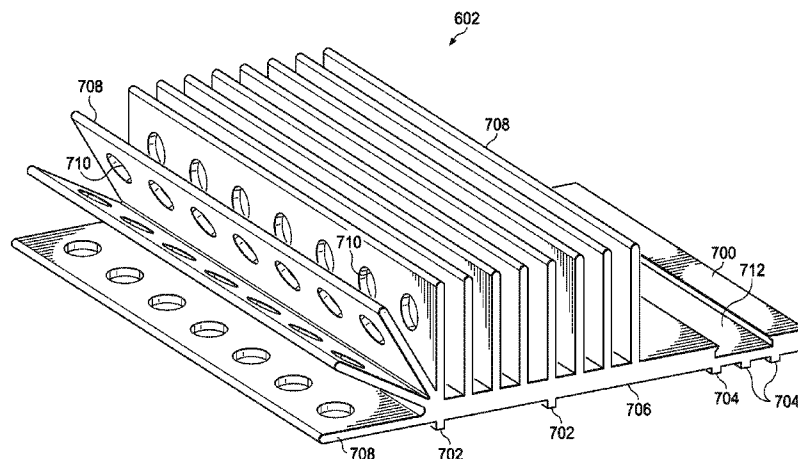

(56)

References Cited

U.S. PATENT DOCUMENTS

5,896,093	A	4/1999	Sjobom		
6,045,240	A	4/2000	Hochstein		
6,274,924	B1	8/2001	Carey et al.		
6,364,507	B1	4/2002	Yang		
6,428,189	B1	8/2002	Hochstein		
6,517,218	B2	2/2003	Hochstein		
6,799,864	B2	10/2004	Bohler et al.		
6,864,513	B2	3/2005	Lin et al.		
7,048,400	B2	5/2006	Murasko et al.		
7,144,135	B2	12/2006	Martin et al.		
7,159,997	B2	1/2007	Reo et al.		
7,375,381	B2	5/2008	Shimizu et al.		
7,396,146	B2	7/2008	Wang		
7,434,964	B1	10/2008	Zheng et al.		
7,458,706	B1	12/2008	Liu et al.		
7,478,915	B1 *	1/2009	Pedersen	362/145	
7,513,653	B1	4/2009	Liu et al.		
7,549,777	B2	6/2009	Huang		
7,654,684	B1	2/2010	Wight et al.		
7,686,469	B2	3/2010	Ruud et al.		
7,748,863	B1	7/2010	Holman et al.		
7,857,483	B2	12/2010	Storch et al.		
7,866,851	B2	1/2011	Chang		
7,896,522	B2	3/2011	Heller et al.		
7,905,634	B2	3/2011	Agurok et al.		
7,952,262	B2	5/2011	Wilcox et al.		
7,997,761	B2 *	8/2011	Peck et al.	362/249.02	
8,035,119	B2	10/2011	Ng et al.		
8,052,303	B2	11/2011	Lo et al.		
8,056,614	B2	11/2011	Chen et al.		
8,092,049	B2	1/2012	Kinnune et al.		
8,192,048	B2	6/2012	Kristoffersen et al.		
8,201,970	B2 *	6/2012	Wang et al.	362/249.02	
8,235,553	B2	8/2012	Minami et al.		
8,246,219	B2	8/2012	Teng et al.		
8,267,551	B2	9/2012	Lin		
8,273,158	B2	9/2012	Jarrier et al.		
8,308,331	B2	11/2012	Loh		
8,310,158	B2	11/2012	Coplin et al.		
8,330,387	B2	12/2012	York et al.		
8,338,841	B2	12/2012	Lerman et al.		
8,348,461	B2	1/2013	Wilcox et al.		
8,360,613	B2	1/2013	Little, Jr.		
8,376,585	B2	2/2013	Noeth		
8,454,194	B2	6/2013	Liu		
8,454,215	B2	6/2013	Bollmann		
8,465,178	B2	6/2013	Wilcox et al.		
8,547,023	B2	10/2013	Chang et al.		
8,567,987	B2	10/2013	Wronski		
8,577,434	B2	11/2013	Merchant et al.		
8,602,599	B2	12/2013	Zimmer et al.		
8,610,357	B2	12/2013	Stoll et al.		
8,622,574	B2	1/2014	Liu		
8,628,217	B2	1/2014	Moshtagh		
2004/0004827	A1	1/2004	Guest		
2005/0047170	A1	3/2005	Hilburger et al.		
2006/0146531	A1	7/2006	Reo et al.		
2008/0080179	A1	4/2008	Giorgi		
2008/0084701	A1	4/2008	Van De Ven et al.		
2008/0180014	A1	7/2008	Tzeng et al.		
2009/0097265	A1	4/2009	Sun et al.		
2009/0180281	A1 *	7/2009	Ahland et al.	362/234	
2009/0256459	A1	10/2009	Liu		
2009/0303711	A1 *	12/2009	Remus et al.	362/234	
2010/0008094	A1	1/2010	Shuai et al.		
2010/0014289	A1 *	1/2010	Thomas et al.	362/235	
2010/0046225	A1	2/2010	Zheng		
2010/0085774	A1	4/2010	Park		
2010/0232155	A1	9/2010	Wang		
2010/0296267	A1	11/2010	Yu et al.		
2011/0002120	A1	1/2011	Song et al.		
2011/0031887	A1	2/2011	Stoll et al.		
2011/0068708	A1 *	3/2011	Coplin et al.	315/294	
2011/0149548	A1	6/2011	Yang et al.		
2011/0170283	A1	7/2011	Chan		
2011/0219650	A1	9/2011	Wright et al.		
2011/0242816	A1	10/2011	Chowdhury et al.		
2011/0278633	A1	11/2011	Clifford		
2011/0280003	A1	11/2011	Hsu et al.		
2012/0080699	A1	4/2012	Chowdhury et al.		
2012/0163005	A1 *	6/2012	Liu	362/427	
2012/0201022	A1	8/2012	van de Ven et al.		
2012/0250321	A1	10/2012	Blincoe et al.		
2013/0010468	A1	1/2013	Stoll et al.		
2013/0057861	A1	3/2013	Ishii et al.		
2013/0063970	A1	3/2013	Oh		
2013/0163005	A1	6/2013	Tsang		
2013/0193850	A1	8/2013	Demuynck et al.		
2013/0270585	A1	10/2013	Mei et al.		
2014/0029259	A1	1/2014	Auyeung		

OTHER PUBLICATIONS

Arik, M., "Thermal Management of LEDs: Package to System," Third International Conference on Solid State Lighting, Proc. of Spie, vol. 5187, Jan. 21, 2012, pp. 64-75.

* cited by examiner

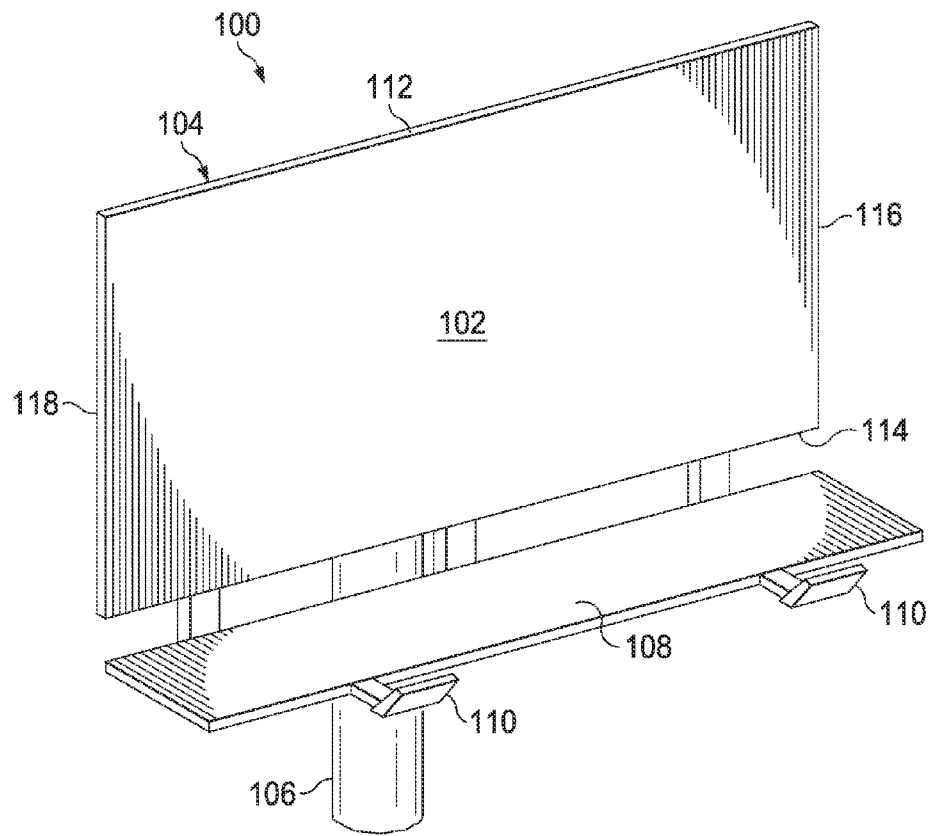


FIG. 1A

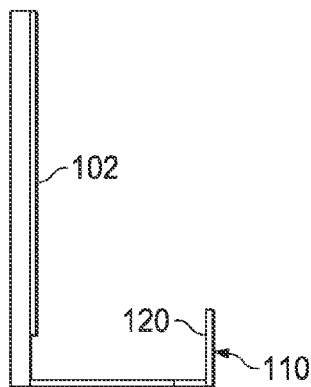


FIG. 1B

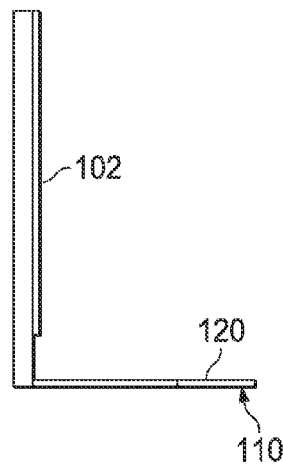


FIG. 1C

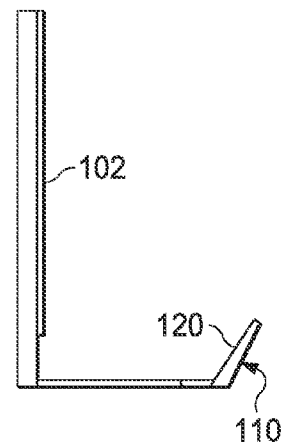
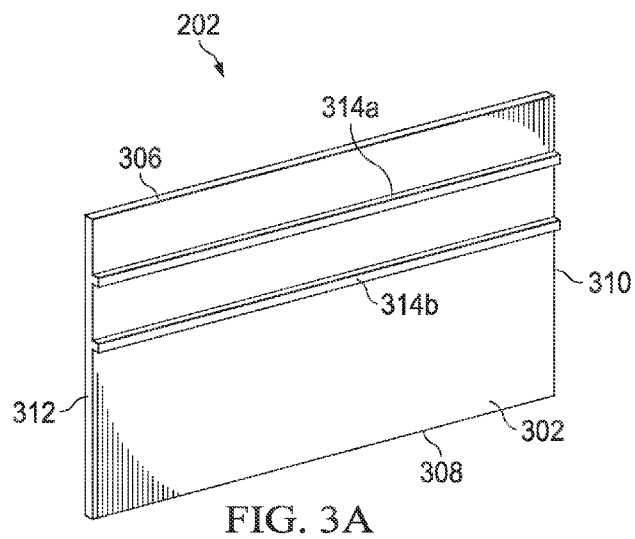
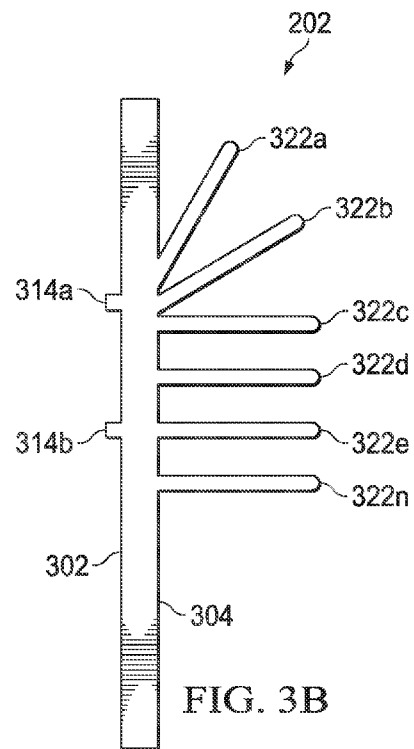
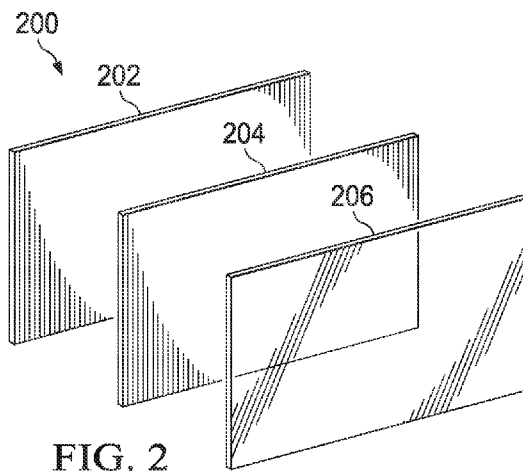


FIG. 1D



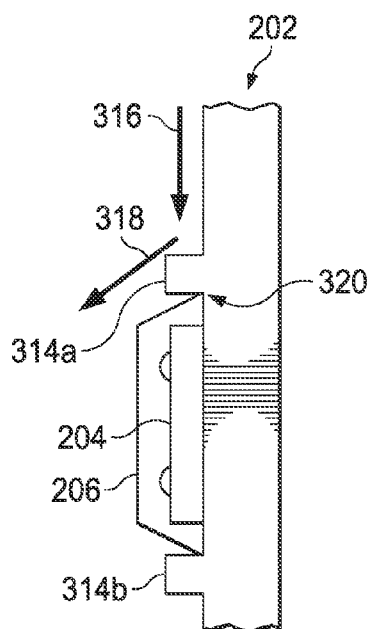


FIG. 3C

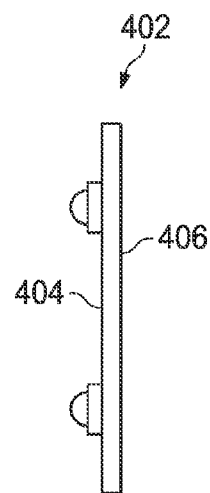


FIG. 4B

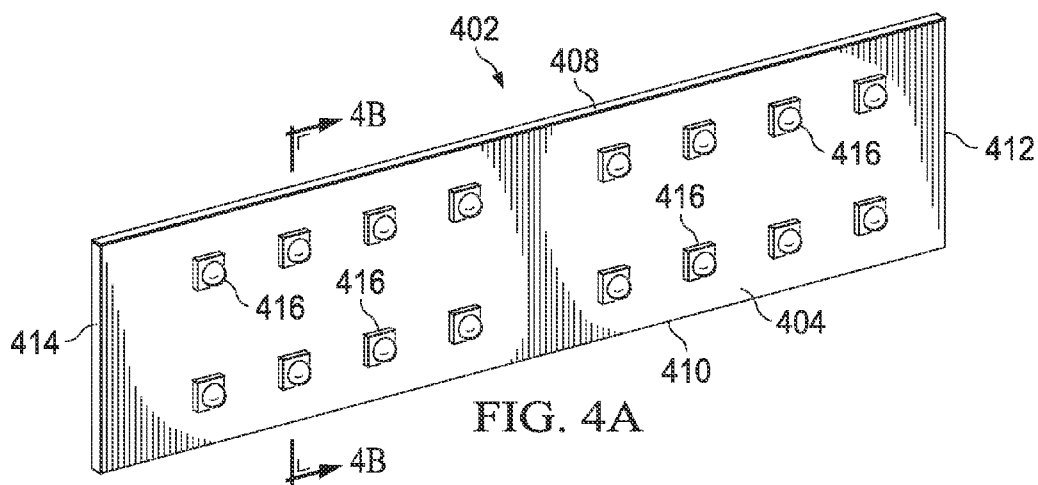
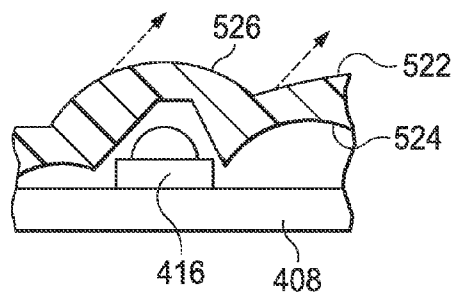
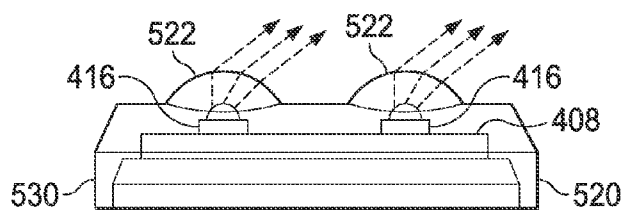
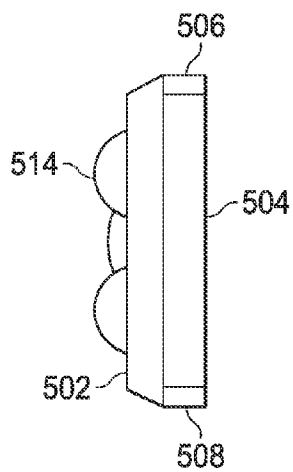
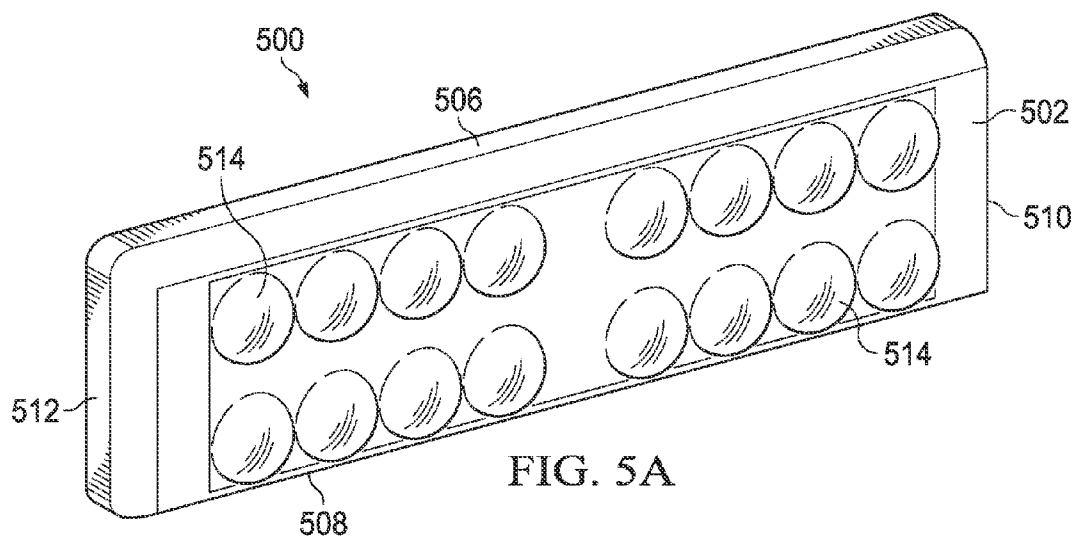


FIG. 4A



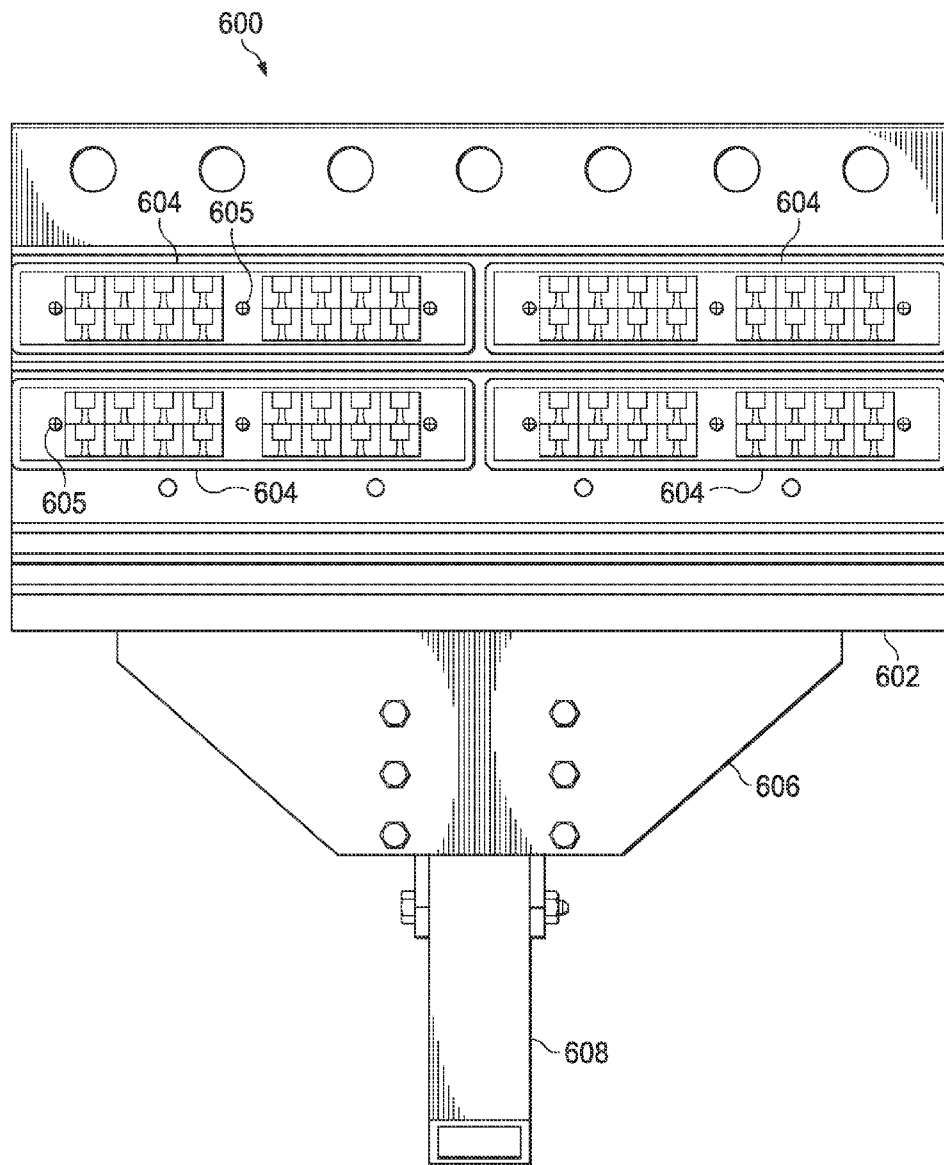


FIG. 6A

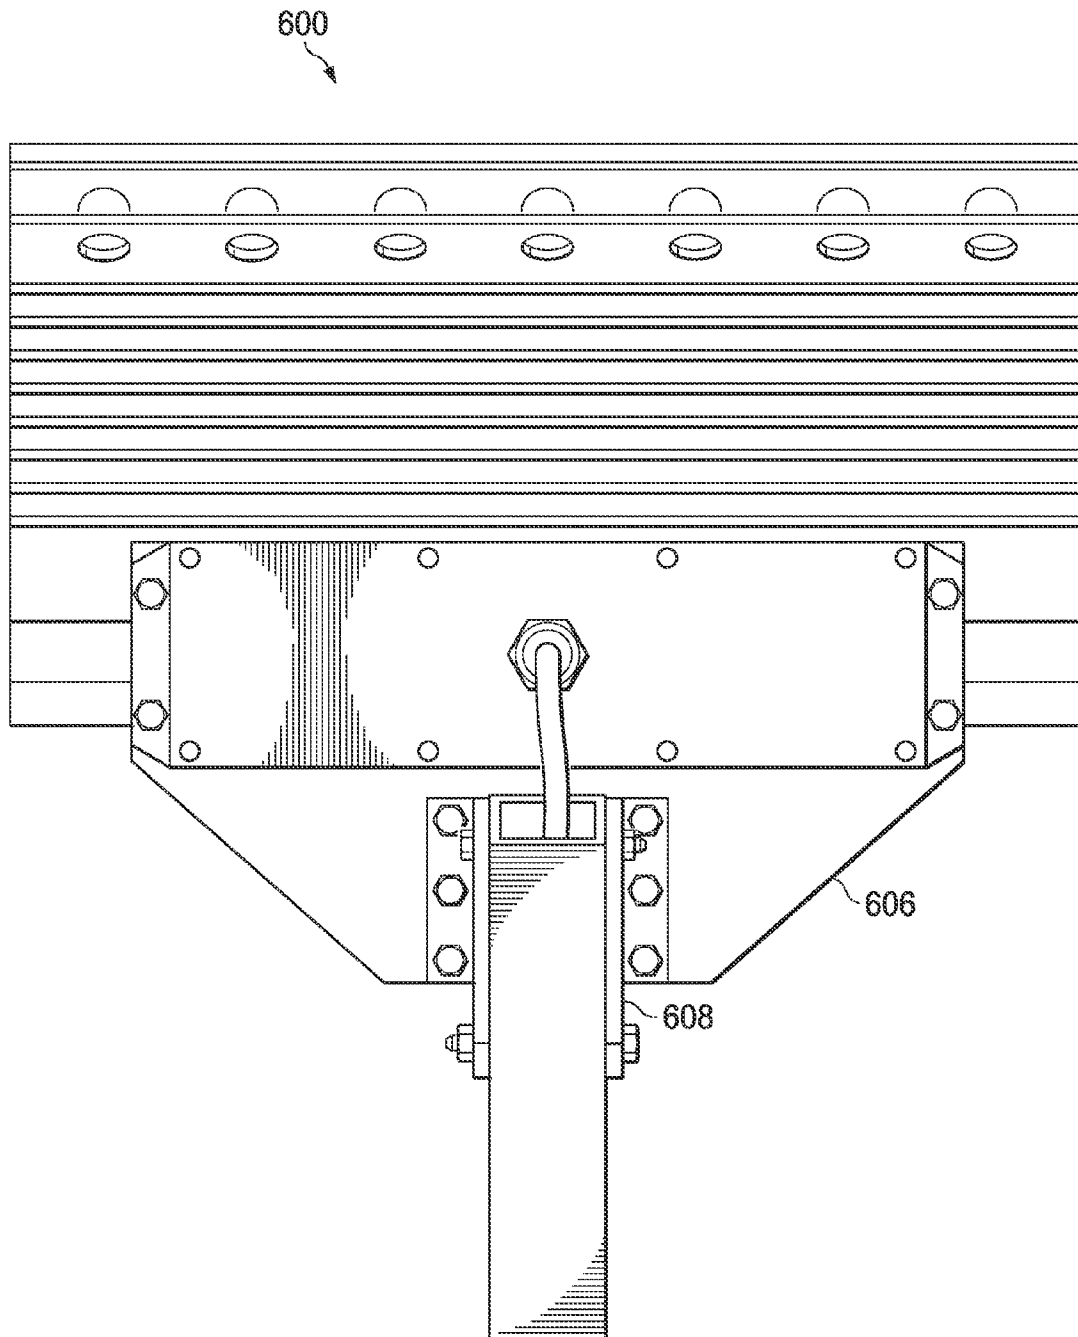


FIG. 6B

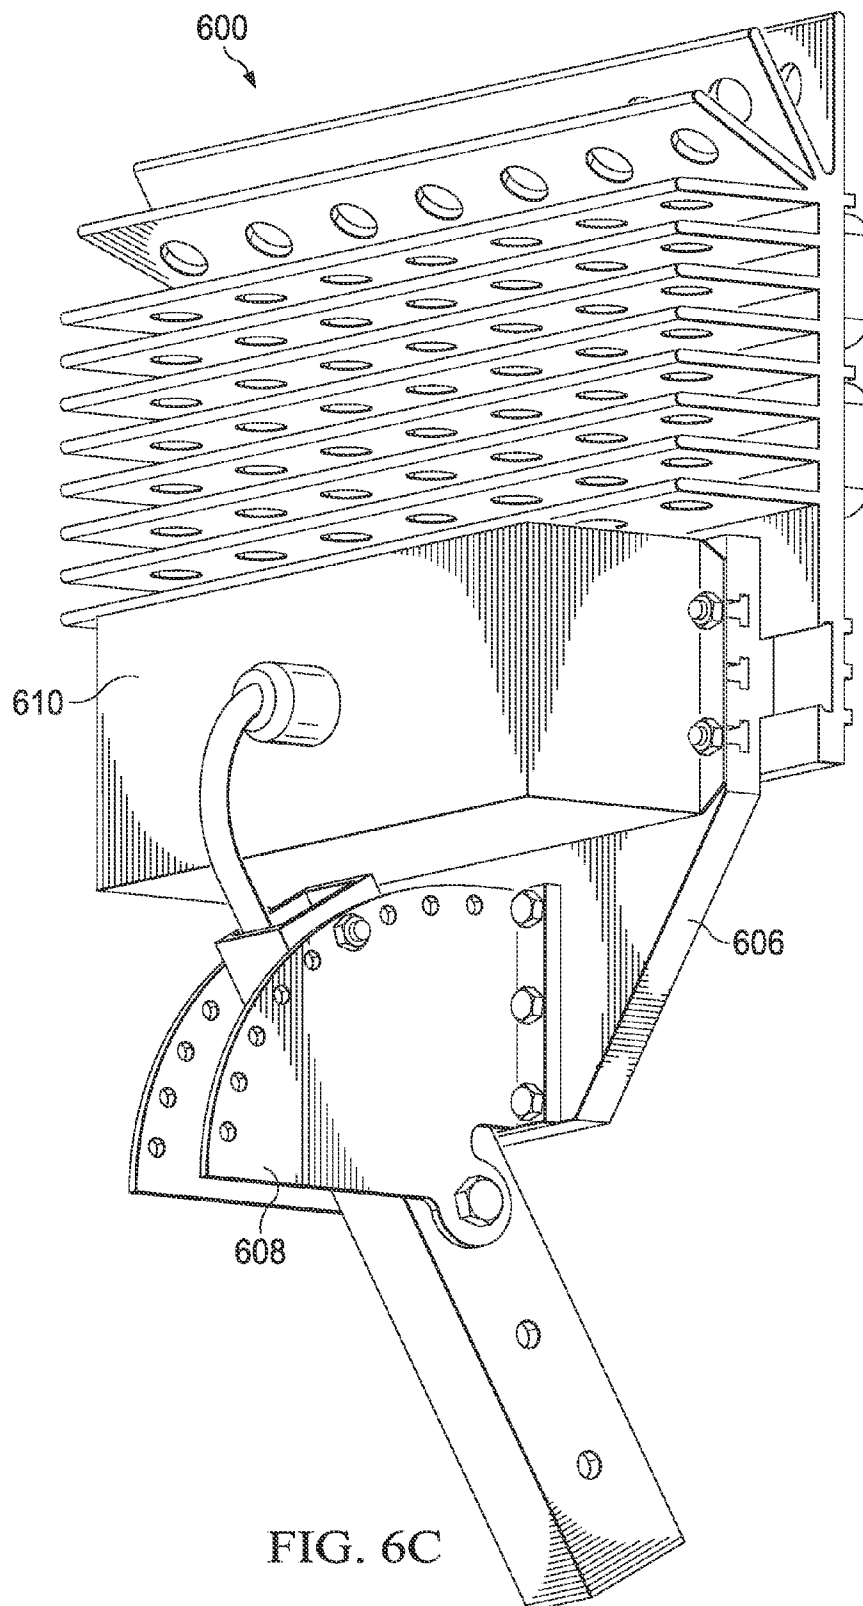


FIG. 6C

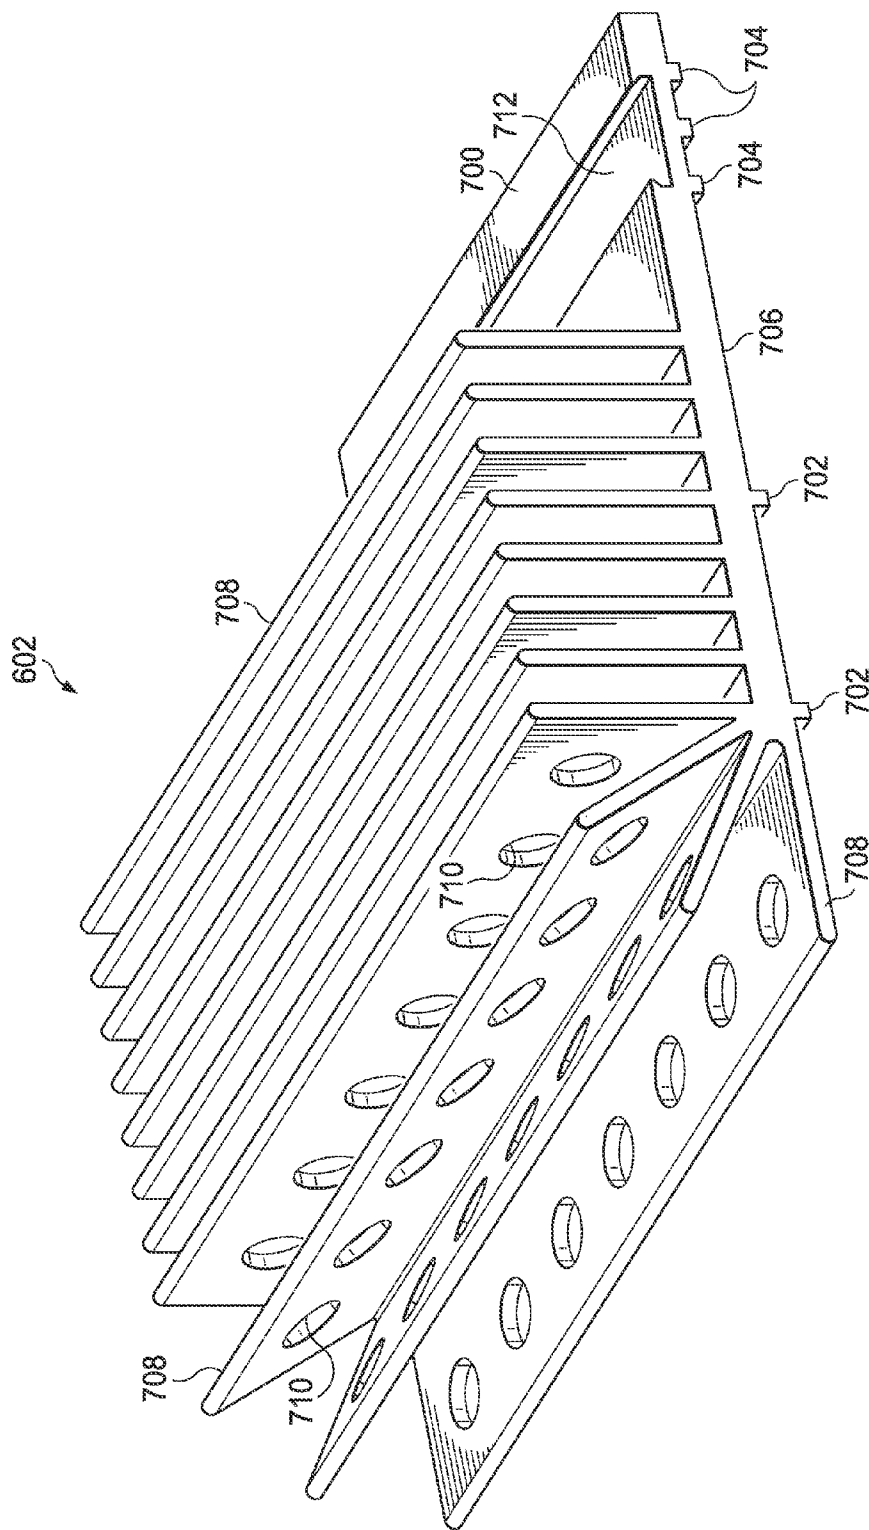


FIG. 7A

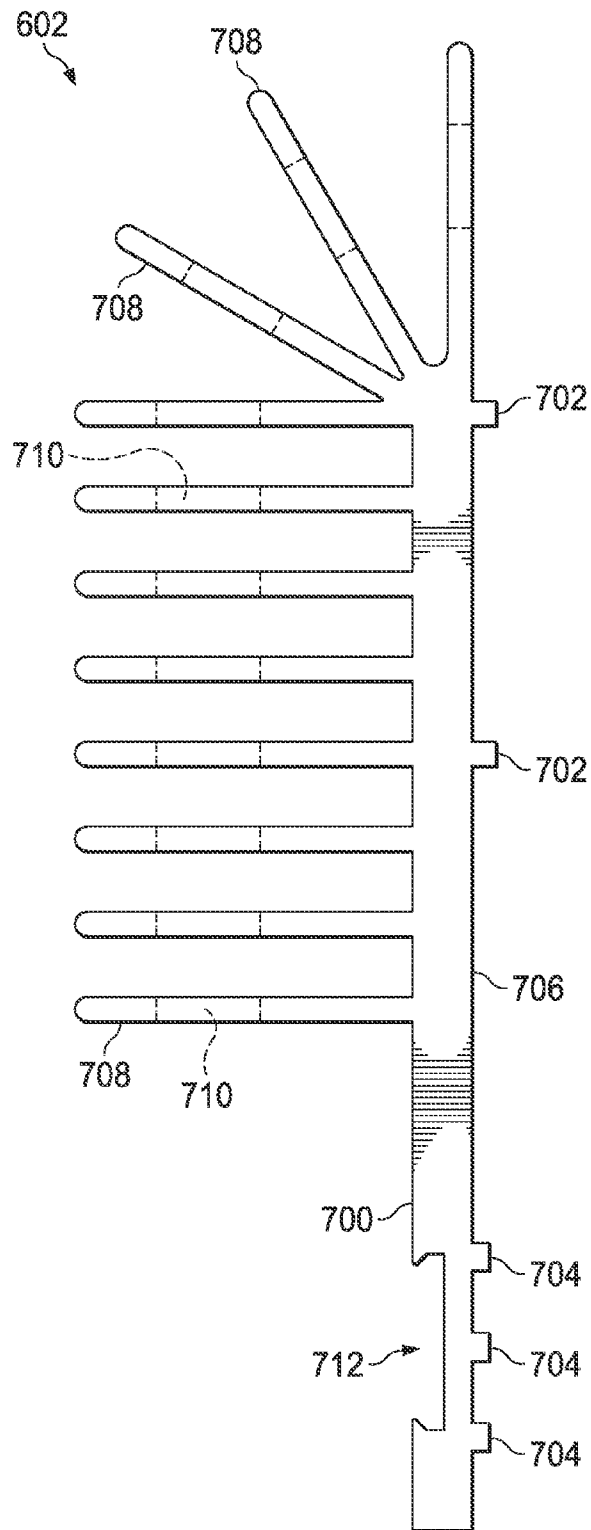
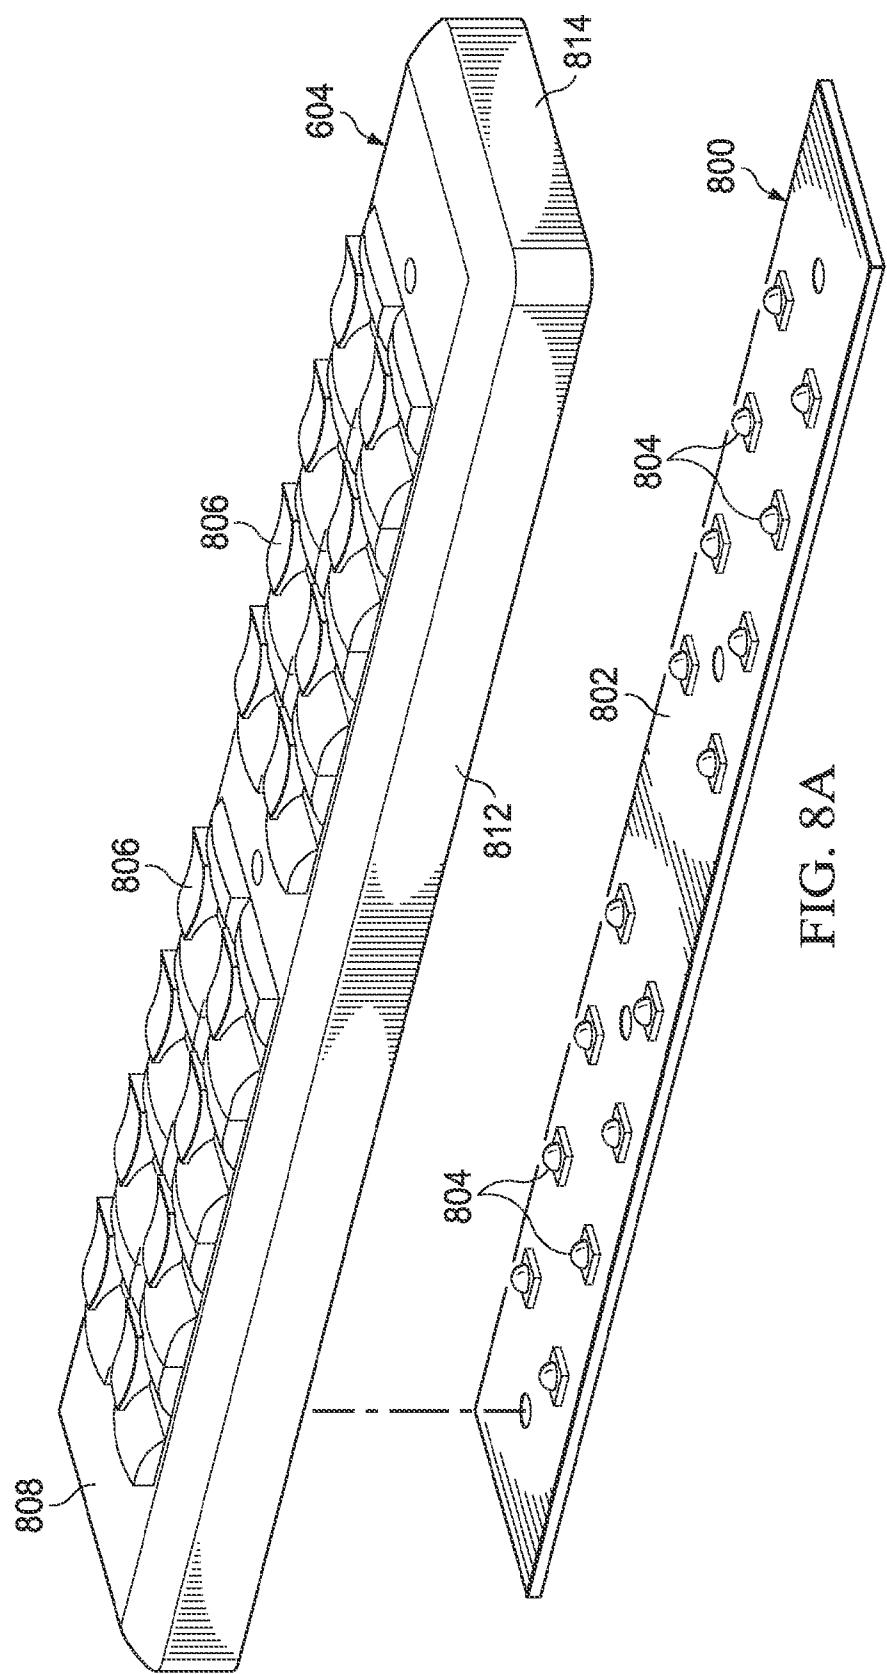
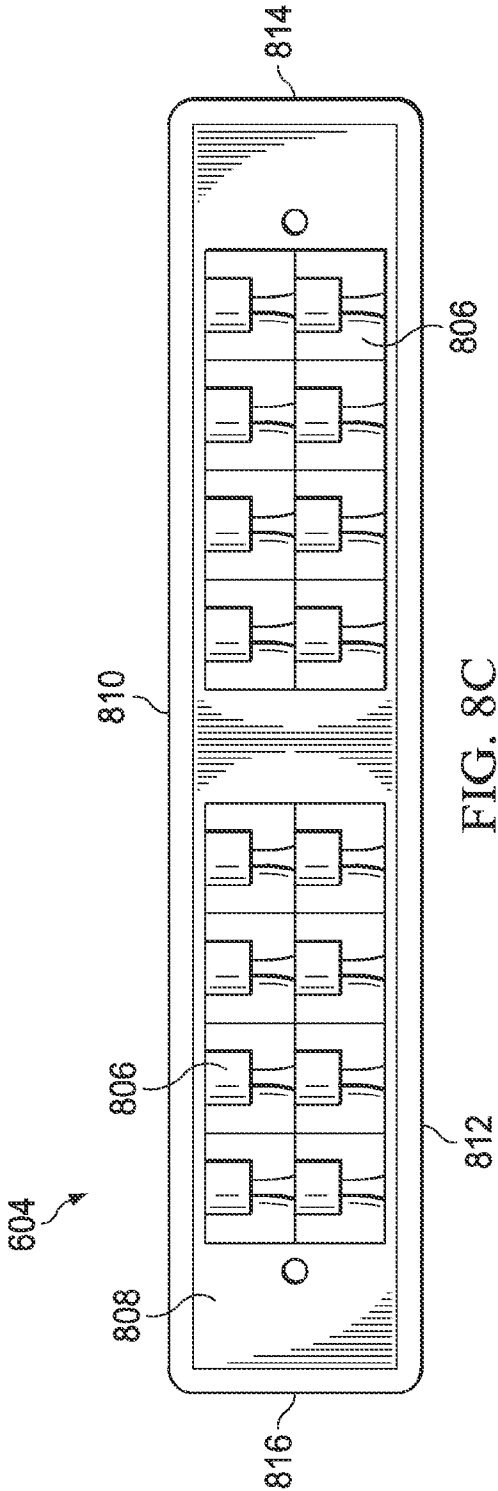
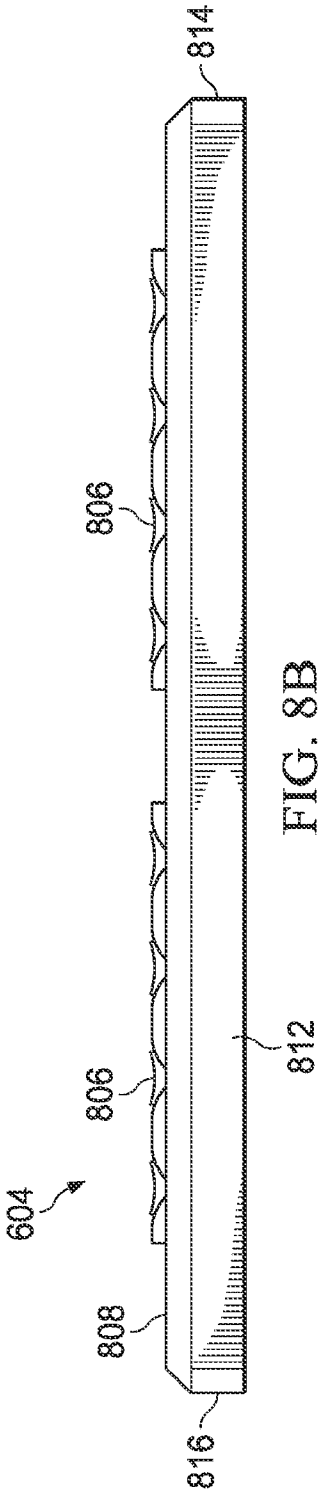


FIG. 7B





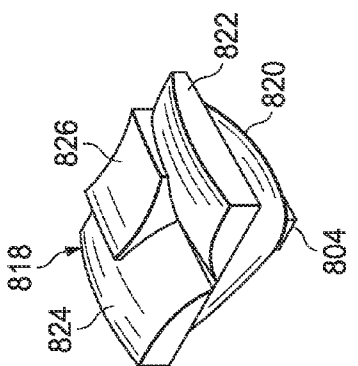


FIG. 8G

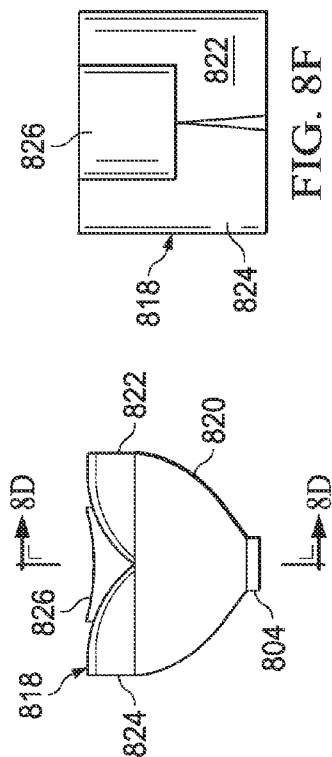


FIG. 8E




FIG. 8D




FIG. 8F

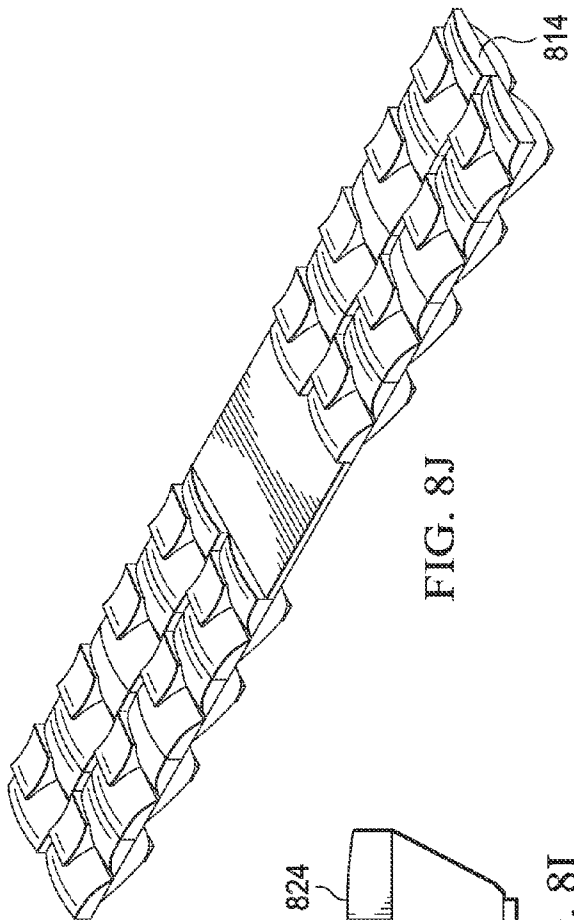


FIG. 8J




FIG. 8I





FIG. 8H

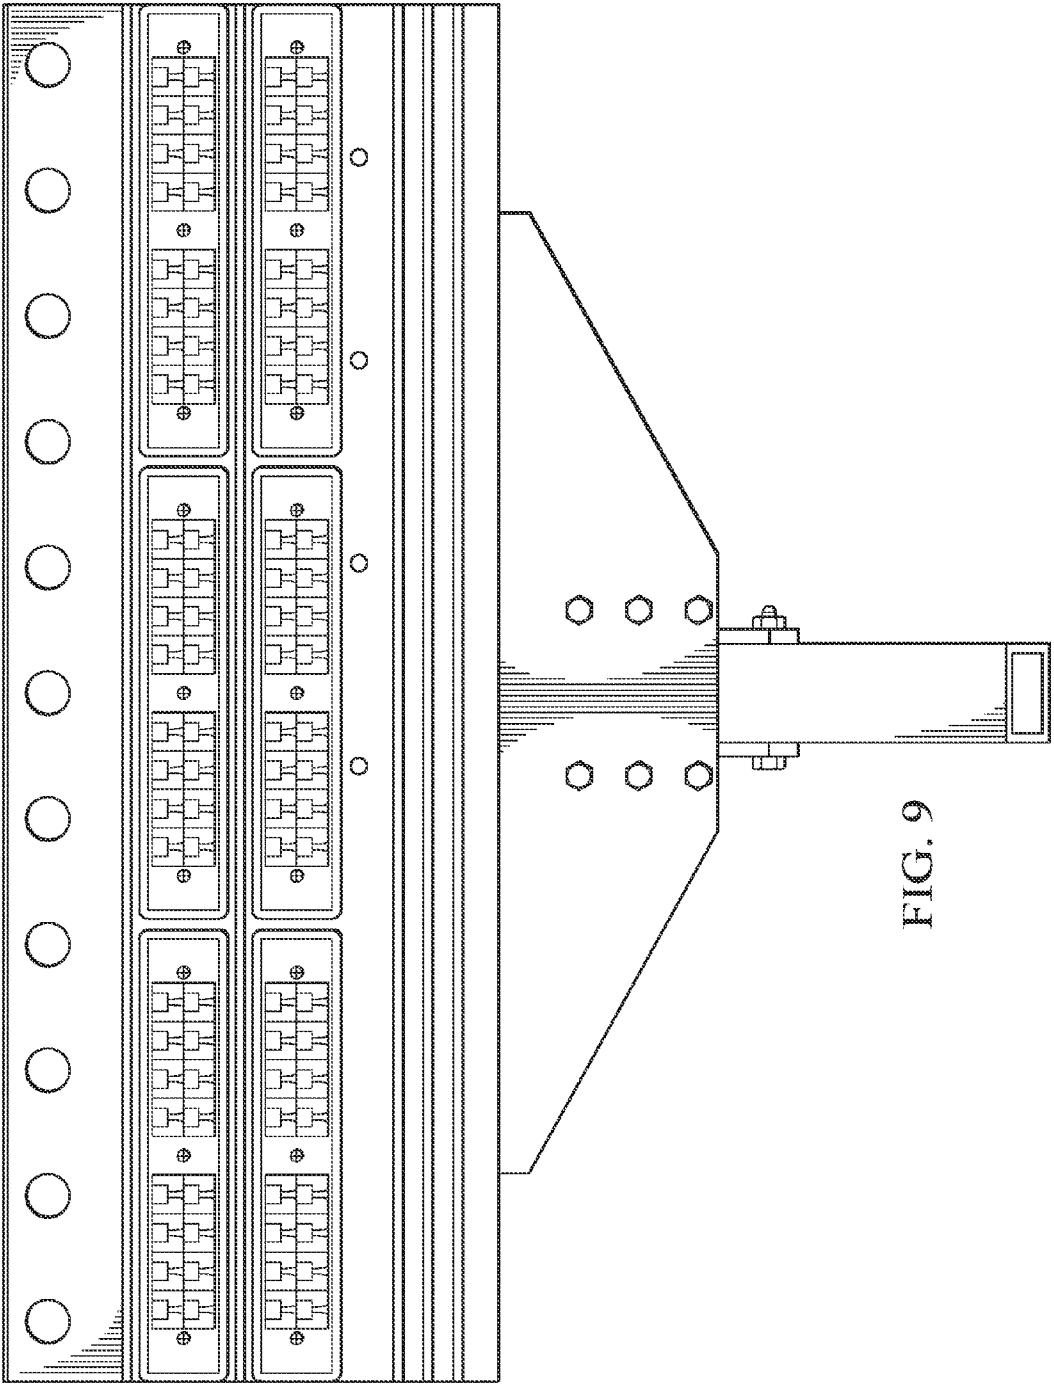

1

STRUCTURE FOR PROTECTING LED LIGHT SOURCE FROM MOISTURE

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims benefit of U.S. Provisional Application No. 61/677,352, filed Jul. 30, 2012, entitled STRUCTURE FOR PROTECTING LED LIGHT SOURCE FROM MOISTURE, the specification of which is incorporated herein in its entirety

TECHNICAL FIELD

The following disclosure relates to lighting systems and, more particularly, to lighting systems using light emitting diodes to externally illuminate signs.

SUMMARY

The present invention disclosed and claimed herein comprises a light emitting diode (LED) lighting assembly. A first panel having a front surface with a protrusion extending therefrom is provided. A second panel is coupled to the first panel directly below the protrusion, wherein the second panel includes at least one LED. A third substantially transparent panel having a cavity formed therein is provided, wherein the cavity is sized to fit over the second panel, wherein the third panel includes a beveled edge that abuts the first panel at a joint directly below the protrusion, and wherein the protrusion and beveled edge are configured to direct moisture away from the joint.

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding, reference is now made to the following description taken in conjunction with the accompanying Drawings in which:

FIG. 1A illustrates one embodiment of a billboard that may be externally lighted by one or more lighting assemblies;

FIGS. 1B-1D illustrate embodiments of angular positions of the lighting assembly of FIG. 1 relative to the billboard;

FIG. 2 illustrates one embodiment of a lighting assembly that may be used to light the billboard of FIG. 1;

FIGS. 3A and 3B illustrate one embodiment of a back panel that may be used in the lighting assembly of FIG. 2;

FIG. 3C illustrates one embodiment of the back panel of FIGS. 3A and 3B with a light panel and an optics panel that may also be used in the lighting assembly of FIG. 2;

FIGS. 4A and 4B illustrate one embodiment of a light panel that may be used with the lighting assembly of FIG. 2;

FIGS. 5A, 5B, 5C and 5D illustrate one embodiment of an optics panel that may be used with the lighting assembly of FIG. 2;

FIGS. 6A-6C illustrate a more detailed embodiment of the lighting assembly of FIG. 2;

FIGS. 7A and 7B illustrate an embodiment of a back panel that may be used with the lighting assembly of FIGS. 6A-6C;

FIG. 8A illustrates an embodiment of an LED assembly and an optics panel that may be used with the lighting assembly of FIG. 6;

FIGS. 8B-8J illustrates embodiments of the optics panel of FIG. 8A and optical elements that may be used to form part of the optics panel; and

FIG. 9 illustrates a more detailed embodiment of the lighting assembly of FIG. 2.

2

DETAILED DESCRIPTION

Billboards, such as those commonly used for advertising in cities and along roads, often have a picture and/or text that must be externally illuminated to be visible in low-light conditions. As technology has advanced and introduced new lighting devices such as the light emitting diode (LED), such advances have been applied to billboards. However, current lighting designs have limitations and improvements are needed. Although billboards are used herein for purposes of example, it is understood that the present disclosure may be applied to lighting for any type of sign that is externally illuminated.

Referring to FIG. 1A, one embodiment of a billboard **100** is illustrated. The billboard **100** includes a surface **102** onto which a picture and/or text may be painted, mounted, or otherwise affixed. The surface **102** may be any size, such as a commonly used size having a width of forty-eight feet wide and a height of fourteen feet. The surface **102** may be provided by placing a backing material on a frame **104** made of steel and/or other materials. The frame **104** may be mounted on one or more support poles **106**, which may be considered part of the frame **104** or separate from the frame **104**. The billboard **100** may include a walkway or other support structure **108** that enables the surface **102** to be more easily accessed.

One or more lighting assemblies **110** may be coupled to the walkway **108** (e.g., to a safety rail or to the walkway itself) and/or to another structural member of the billboard **100** to illuminate some or all of the surface **102** in low light conditions. The lighting assembly **110** may be mounted at or near a top edge **112** of the billboard **100**, a bottom edge **114** of the billboard **100**, a right edge **116** of the billboard **100**, and/or a bottom edge **118** of the billboard **100**. The lighting assembly **110** may be centered (e.g., located in approximately the center of the billboard **100**) or off center as illustrated in FIG. 1A.

With additional reference to FIGS. 1B-1D, a surface **120** of the lighting assembly **110** may be parallel with respect to the surface **102** of the billboard **100** (FIG. 1B), may be perpendicular with respect to the surface **102** (FIG. 1C), or may be angled with respect to the surface **102** (FIG. 1D). It is understood that the lighting assembly **110** may be placed in many different orientations and locations relative to the billboard **100** and to one another, and the illustrated positions are only for purposes of example. Furthermore, it is understood that references to "top," "bottom," "left," and "right" are used in the present disclosure for purposes of description and do not necessarily denote a fixed position. For example, the billboard **100** may be turned on end, and the referenced "top," "bottom," "left," and "right" edges may still be readily identifiable although the "top" edge would be the "left" edge or the "right" edge.

One problem with current lighting technology is that it can be difficult to direct light only onto the surface **102** and even more difficult to do so evenly. This may be due partly to the placement of the lighting assembly **110**, as shown in FIGS. 1B-1D. As the lighting assembly **110** is off center relative to the surface **102**, light emitted from the lighting assembly **110** may not evenly strike the surface **102**. One problem with uneven illumination is that certain parts of the surface **102** may be more brightly illuminated than other parts. This creates "hot spots" that may be undesirable. Attempting to evenly illuminate the surface **102** may cause light to be directed past the edges **112**, **114**, **116**, and **118** as attempts are made to balance out hot spots in particular areas. However, light that does not strike the surface **102** is wasted and may

create problems (e.g., light pollution), as well as waste illumination that could be used for the surface **102**.

In addition to the difficulties of evenly illuminating the surface **102**, the use of LEDs in an exterior lighting environment involves issues such as heat dissipation and protecting the LEDs against environmental conditions such as moisture. The presence of moving mechanical features such as fans that may be used to provide increased airflow for cooling may create additional reliability problems. Due to the difficulty and expense of replacing and/or repairing the lighting assembly **110** in combination with the desire to provide consistent lighting while minimizing downtime, such issues should be addressed in a manner that enhances reliability and uptime.

Referring to FIG. 2, one embodiment of a lighting assembly **200** is illustrated. The lighting assembly **200** provides a more detailed embodiment of the lighting assembly **110** of FIG. 1. The lighting assembly **200** includes a back panel **202**, a light panel **204** (e.g., a printed circuit board (PCB)) having a plurality of LEDs (not shown) mounted thereon, and an optics panel **206**. As will be described below in more detailed examples, light from the LEDs of the light panel **204** may be directed by the optics panel **206** to illuminate the surface **102** of the billboard **100** of FIG. 1. The back panel **202** may be configured to serve as a supporting substrate for the light panel **204** and optics panel **206**, as well as to dissipate heat produced by the LEDs.

It is understood that any of the back panel **202**, light panel **204**, and optics panel **206** may actually be two or more physical substrates rather than a single panel as illustrated in FIG. 2. Furthermore, it is understood that there may be additional panels positioned behind the back panel **202**, in front of the optics panel **206**, and/or between the back panel **202** and light panel **204** and/or between the light panel **204** and optics panel **206**.

Referring to FIGS. 3A-3C, one embodiment of the back panel **202** is illustrated with a front surface **302** and a back surface **304**. The back panel **202** includes a top edge **306**, a bottom edge **308**, a right edge **310**, and a left edge **312**. The panel **202** may be formed of one or more thermally conductive materials (e.g., aluminum) and/or other materials.

The front surface **302** provides a mounting surface for the light panel **204**. In some embodiments, the front surface **302** of the panel **202** may include one or more protrusions **314a** and **314b** that are substantially parallel to the top edge **306**. The protrusions **314a** and **314b** may be configured to protect the light panel **204** from moisture. Although only two protrusions **314a** and **314b** are illustrated, it is understood that a single protrusion may be provided or three or more protrusions may be provided. Furthermore, such protrusions may vary in length, shape (e.g., may have angled or curved surfaces), orientation, and/or location on the front surface **302**.

Referring specifically to FIG. 3C, a light panel **204** and an optical panel **206** may be mounted under the protrusion **314a** (FIG. 3C). Moisture running down the front surface **302** in the direction of arrow **316** may strike the protrusion **314a** and be directed away from the light panel **204** and optical panel **206** as shown by arrow **318**. Although not shown, moisture may also be directed length down the protrusion **314a**. Accordingly, protrusion **314a** may serve as a gutter and aid in directing moisture away from a joint **320** where the optical panel **206** abuts the front surface **302**. This may be beneficial even when a moisture resistant compound is used to seal the joint **320**. In embodiments where there are multiple light panels **204** arranged vertically on the front surface **302**, there may be a protrusion positioned above each light panel **204**. For example, the protrusion **314a** may be positioned directly

above one light panel **204** and the protrusion **314b** may be positioned directly above another light panel **204**.

Referring specifically to FIG. 3B, the back surface **304** may be configured to increase heat dissipation. For example, the back surface **304** may be configured with a heat sink provided by fins **322a-322N**, where N denotes a total number of fins. The fins **322a-322N** increase the surface area of the back surface **304**, thereby providing for additional heat dissipation to the surrounding air. The fins **322a-322N** may be formed as part of the panel **202** or may be otherwise coupled to the panel **202** (e.g., may be part of a discrete heat sink that is coupled to the back surface **304**). Some or all of the fins **322a-322N** may be angled, as shown by fins **322a** and **322b**. In some embodiments, holes (not shown) may be provided in some or all of the fins **322a-322N** to aid in air circulation. In such embodiments, the holes may cause a chimney effect in which heated air rises through the holes and is replaced by cooler air. This may be particularly effective in environments where natural air movement is limited.

Referring to FIGS. 4A and 4B, one embodiment of a single PCB **402** of the light panel **204** is illustrated. In the present example, the light panel **204** may include multiple PCBs **402**, although it is understood that any number of PCBs may be used based on design issues such as the amount of illumination needed, the amount of illumination provided by a single PCB **402**, the size of the surface **102** of the billboard **100**, and/or other factors. As shown in the present embodiment with a substantially rectangular cross-section, the PCB **402** includes a front surface **404**, a back surface **406**, a top edge **408**, a bottom edge **410**, a right edge **412**, and a left edge **414**.

The PCB **402** may include one or more strings of LEDs **416**, with multiple LEDs **416** in a string. For example, a string may include eight LEDs **416** and each PCB **402** may include two strings for a total of sixteen LEDs **416**. In this configuration, a light panel **204** having eight PCBs **402** would include ninety-six LEDs **416**. It is understood that although the PCBs **404** are shown as being substantially identical, they may be different in terms of size, shape, and other factors for a single light panel **204**.

In the present example, the LEDs **416** are surface mounted, but it is understood that the LEDs **416** may be coupled to the panel **204** using through hole or another coupling process. The surface mounted configuration may ensure that a maximum surface area of each LED **416** is in contact with the PCB **404**, which is in turn in contact with the back panel **202** responsible for heat dissipation. Each string of LEDs may receive a constant current with the current divided evenly among the LEDs **416**.

Referring to FIGS. 5A, 5B, 5C and 5D, one embodiment of a single lens panel **500** of the optics panel **206** is illustrated. In the present example, the optics panel **206** may include multiple lens panels **500**, although it is understood that any number of lens panels may be used based on design issues such as the number, arrangement, and orientation of the LEDs **416**, the size of the surface **102**, and/or other factors. As shown in the present embodiment with a substantially rectangular cross-section that is configured for use with the PCB **402** of FIG. 4, a single lens panel **500** includes a front surface **502**, a back surface **504**, a top side **506**, a bottom side **508**, a right side **510**, and a left side **512**. The sides **506**, **508**, **510**, and **512** may form a cavity into which the PCB **402** may fit, thereby providing protection for the PCB **402** from environmental conditions such as moisture.

The lens panel **500** may include a beveled or angled top side **506** and/or bottom side **508** as illustrated in FIG. 5B. The beveling/angling may aid in preventing moisture from reaching the PCB **402** under the lens panel **500**, as water will more

readily flow from the area of the joint 320 (FIG. 3C) due to the angled surface than if the top side 506 was relatively flat.

The lens panel 500 may include multiple optical elements 514. A single optical element 514 may be provided for each LED 416, a single optical element 514 may be provided for multiple LEDs 416, and/or multiple optical elements 514 may be provided for a single LED 416. In some embodiments, the optical elements 514 may be provided by a single multi-layer optical element system provided by the lens panel 500.

In the present example, the optical elements 514 are configured so that the light emitted from each LED 416 is projected onto the entire surface 102 of the billboard 100. In other words, if all other LEDs 416 were switched off except for a single LED 416, the entire surface 102 would be illuminated at the level of illumination provided by the single LED 416. In one embodiment, the rectangular target area of the surface 102 would be evenly illuminated by the LED 416, while areas beyond the edges 112, 114, 116, and 118 would receive no illumination at all or at least a minimal amount of illumination from the LED 416. What is meant by “evenly” is that the illumination with a uniformity that achieves a 3:1 ratio of the average illumination to the minimum. Thus, by designing the lens in such a manner, when all LEDs are operating, the light form the collective thereof will illuminate the surface at the 3:1 ratio. When one or more LEDs fail, the overall illumination decreases, but the uniformity maintains the same uniformity. Also, as described hereinabove, the “surface” refers to the surface that is associated with a particular LED panel. It may be that an overall illuminated surface is segmented and multiple panels are provided, each associated with a particular segment.

In some embodiments, as shown in FIG. 1, two lighting assemblies 110 may be used. Each lighting assembly may be powered by a separate power supply (not shown), and may be configured to illuminate the entire surface 102. In such an embodiment, if one power supply fails, the remaining lighting assembly 110 will still illuminate the entire surface 102, although at a lesser intensity than when both lighting assemblies 110 are functioning. This provides evenly distributed illumination when both lighting assemblies 110 are functioning correctly, and continues to provide evenly distributed illumination when one lighting assembly 110 malfunctions. Accordingly, the entire surface 102 of the billboard 100 may be illuminated even when an entire lighting assembly 110 has malfunctioned and is providing no illumination at all due to the redundancy provided by configuration of the lighting assemblies 110.

FIG. 5C illustrates a detail of the lens assembly. Each of the diodes 416 is mounted on the board 408 at a minimum distance. Overlying the board and LEDs 416 is transparent lens substrate 520. This substrate 520 has a plurality of lens structures 522, each associated with one of the LEDs 416, such that each of the LEDs 416 has the light emitted therefrom directed outward towards the surface, each lens structure being substantially the same. The minimum distance is designed such that overlapping light from adjacent LEDs does not create interference patterns and result in dead spots on the surface. The lens structure 522 is designed to create the 3:1 uniformity and also, the lens structure is designed to “direct” the light from an edge of the surface to cover the entire surface. This is shown by the angle of the light rays in FIG. 5C. Also, the beveled edge 530 will basically surround the PCB 408, thus protecting it from moisture. The lens substrate 520 is secured with screws (not shown).

FIG. 5D illustrates a detail of the lens structure 522. This structure includes an interior surface 524 and an exterior surface 526 that shapes and directs the light in the correct

pattern. This is an acrylic material. With such a design, the lighting assembly can be disposed at an edge of the surface to illuminate the entire surface.

Furthermore, in some embodiments as described above, each LED 416 of a single lighting assembly 110 may be configured via the optical elements 514 to illuminate the entire surface 102. In such embodiments, if one or more LEDs 416 or strings of LEDs fails, the remaining LEDs 416 will still illuminate the entire surface 102, although at a lesser intensity than when the failed LEDs 416 are functioning. This provides evenly distributed illumination when all LEDs 416 are functioning correctly, and continues to provide evenly distributed illumination when one or more LEDs are malfunctioning. Accordingly, the billboard 100 may be illuminated even when multiple LEDs 416 have malfunctioned and are providing no illumination at all due to the redundancy provided by configuration of the lighting assemblies 110.

It is understood that some embodiments may direct substantially all illumination from a lighting assembly 110 evenly across the surface 102 while some illumination is not evenly distributed. For example, substantially all LEDs 416 may be directed to each evenly illuminate the surface 102 with the exception of a relatively small number of LEDs 416. In such cases, the illumination provided by the remaining LED or LEDs 416 may be directed to one or more portions of the surface 102. If done properly, this may be accomplished while minimizing any noticeable unevenness in the overall illumination, even if one of the remaining LEDs 416 malfunctions. For example, the lighting assembly 110 may be configured to direct the illumination provided by one LED 416 to only the left half of the surface 102, while directing the illumination from another LED 416 to only the right half of the surface 102. The loss of one of these two LEDs may not noticeably impact the illumination of the surface 102. It is understood that such variations are within the scope of this disclosure.

In embodiments where the illumination is evenly distributed across the surface 102, it is understood that the optics panel 206 may be configured specifically for the light panel 204 and the surface 102. For example, assuming the surface 102 is forty-eight feet wide and sixteen feet high, the lens panel 500 of FIG. 5 may be specifically designed for use with the PCB 402 of FIG. 4. This design may be based on the particular layout of the PCB 402 (e.g., the number and arrangement of the LEDs 416), the amount of illumination provided by the LEDs 416, the size of the surface 102, the distance between the lens panel 500 and the surface 102, the angle at which the lens panel 500 is mounted relative to the surface 102 (e.g., FIGS. 1B-1D), and/or other factors. Accordingly, changes in any of these factors may entail a change in the design of the lens panel 500 in order to again evenly distribute the illumination provided by each LED 416 across the entire surface 102. It is understood that various standard configurations of the lighting assembly 110 may be developed for various billboard and/or other externally illuminated signs so that a particular configuration may be provided based on the parameters associated with a particular billboard and/or externally illuminated sign.

Referring to FIGS. 6A-6C, one embodiment of a lighting assembly 600 is illustrated that provides a more detailed embodiment of the lighting assembly 200 of FIG. 2. The lighting assembly 600 includes a back panel 602, a light panel formed by multiple LED assemblies (denoted by reference number 800 in FIG. 8A), and an optics panel formed by multiple lens panels 604. Accordingly, as described previously, the light panel 204 in the current example is represented by multiple LED assemblies 800 and the optics panel

206 is represented by multiple lens panels 604. In the present embodiment, the lighting assembly 600 includes four LED assemblies 800 and four lens panels 604.

Although various attachment mechanisms (e.g., threaded screws, bolts, and/or other fasteners) may be used to couple the lens panels and LED assemblies to the back panel 602, the present embodiment uses multiple threaded fasteners 605 (e.g., screws) that extend through the lens panels and the LED assemblies and engage threaded holes in the back panel 602.

The lighting assembly 600 is also illustrated with a mounting plate 606 that couples to the back panel 602 and to an adjustable mounting bracket 608. The adjustable mounting bracket 608 may be used to couple the lighting assembly 600 to a portion of the billboard 100 (FIG. 1) and/or to another support member. A power supply enclosure 610 may be coupled to the mounting plate 606 and configured contain a power supply (not shown) capable of supplying power to LEDs of the LED assemblies 800. It is noted that separating the power supply from the back panel 602 may aid in heat dissipation by the back panel 602 as it does not have to dissipate heat from the power supply to the same extent as if the power supply was mounted directly to the back panel 602.

The location of the power supply may also be beneficial as snow not melted by the heat produced by the LED may be melted by heat produced by the power supply. This may aid in reducing snow buildup on the LEDs.

With additional reference to FIGS. 7A and 7B, one embodiment of the back panel of FIG. 602 is illustrated. A front surface 700 includes multiple protrusions 702 that may be configured to protect the light panels (not shown) against moisture as previously described. The front surface 700 may include additional protrusions 704.

A back surface 706 includes multiple fins 708 that form a heat sink to aid in the dissipation of heat from the back panel 602. In the present example, the fins 708 are substantially rectangular in shape. In the present example, the back panel 602 is extruded and the fins 708 run parallel to the top edge with a longitudinal axis of each fin 708 being substantially parallel to a longitudinal axis of the back panel 602. Forming the fins 708 in a vertical manner is possible, but may increase the cost of the back panel 602 due to the extrusion process. As shown, the fins 708 may be substantially perpendicular to the back surface 706, and/or may be angled. In the present example, the fins 708 are angled such that near the top of the back panel 702, the fins 708 are angled towards the top.

Because the fins 708 are parallel to the top edge, heat may be trapped due to its inability to rise vertically. Accordingly, holes 710 may be present in some or all of the fins 708 (marked but not actually visible in the side view of FIG. 7B) to provide paths for the heat to rise vertically in spite of the orientation of the fins 708. The holes 710 may create a chimney effect that increases air flow across the fins 708 and aids in the cooling process. In some embodiments, some or all of the fins 708 may be angled such that heat is not trapped.

The back surface 706 may also include a groove 712 that is configured to receive a tongue of the mounting plate 606 in a tongue-in-groove manner.

With additional reference to FIGS. 8A-8J, embodiments of a single LED assembly 800 and a single lens panel 604 that may be used with the lighting assembly 600 are illustrated. As shown, the single LED assembly 800 and the single optics panel 604 may be configured for use together.

Referring specifically to FIG. 8A, the LED assembly 800 includes a substrate 802 (e.g., a PCB) onto which are mounted multiple LEDs 804. In the present example, the LED assembly 800 includes two strings of eight LEDs 804 each for a total of sixteen LEDs 804. It is understood that this is merely an

example, and there may be more or fewer LEDs 804 on the light panel 800, and the LEDs 804 may be arranged in many different ways on the substrate 802.

Referring also to FIGS. 8B-8J, the optics panel 604 may include optical elements 806 arranged on an upper surface 808 of the optics panel 604. The optics panel 604 may further include sides 810, 812, 814, and 816 that are configured to fit around the edge of the substrate 802 of the light panel 800. The bottom edge of each side 810, 812, 814, and 816 abuts the front surface 700 of the back panel 602 and may be sealed to the front surface 700 using a moisture resistant sealant.

As shown in FIGS. 8D-8H, a single optical element 806 may include multiple lens elements designed to distribute the illumination provided by a single LED 804 across a surface such as the surface 102 of FIG. 1. A first lens element 820 may be positioned proximate to the LED 804, and additional lens elements 822, 824, and 826 may be positioned above the lens element 820. Multiple optical elements 806 may be combined and formed as a single optics panel 604 that is configured to operate with the LED assembly 800.

Referring to FIG. 9, another embodiment of a lighting assembly 900 is illustrated that provides a more detailed embodiment of the lighting assembly 200 of FIG. 2. The lighting assembly 900 is similar to the lighting assembly 600 of FIG. 6, but includes six LED assemblies rather than the four six LED assemblies of the lighting assembly 600. It is understood that the lighting assembly 900 may require a larger power supply than the lighting assembly 600 (e.g., a one hundred and fifty watt power supply instead of a one hundred and twenty watt power supply).

Although the preferred embodiment has been described in detail, it should be understood that various changes, substitutions and alterations can be made therein without departing from the spirit and scope of the invention as defined by the appended claims.

What is claimed is:

1. A light emitting diode (LED) lighting assembly comprising:

a first panel having a first major surface with a first protrusion extending therefrom and a second major surface, the second major surface facing opposite to the first major surface, wherein a front surface of the lighting assembly includes portions of the first major surface, wherein the first major surface of the first panel comprises a first set of edges and a perpendicular second set of edges, wherein the first protrusion is parallel to the first set of edges but does not overlap with the first set of edges;

a second panel coupled to the first panel directly below the first protrusion, wherein the second panel includes at least one LED;

a third panel comprising a substantially transparent substrate, the third panel having a cavity formed therein, wherein the cavity is sized to fit over the second panel, wherein the third panel includes a beveled edge that abuts the first panel at a joint directly below the first protrusion, and wherein the first protrusion and beveled edge are configured to direct moisture away from the joint; and

a power supply enclosure disposed on the second major surface of the first panel, wherein the power supply enclosure is positioned outside an assembly of the first panel, the second panel, and the third panel, the power supply enclosure configured to comprise a power supply capable of supplying power to the at least one LED.

2. The LED lighting assembly of claim 1, further comprising:

9

a plurality of fins extending from the second major surface of the first panel; and

a second protrusion extending from the first major surface of the first panel, wherein the second panel is disposed between the first protrusion and the second protrusion, wherein, in a plane parallel to the first major surface of the first panel, the plurality of fins overlap with the first protrusion and the second protrusion.

3. The LED lighting assembly of claim 2, wherein the third panel includes another beveled edge that abuts the first panel at another joint directly above the second protrusion.

4. The LED lighting assembly of claim 1, wherein the third panel comprises acrylic.

5. The LED lighting assembly of claim 1, wherein the third panel comprises a plurality of optical elements.

6. The LED lighting assembly of claim 1, wherein the second panel comprises a plurality of LEDs, wherein the third panel comprises a plurality of optical elements, wherein a single optical element is provided for each LED of the plurality of LEDs.

7. The LED lighting assembly of claim 1, wherein the second panel comprises a plurality of LEDs, wherein the third panel comprises a plurality of optical elements, wherein more than one optical element is provided for each LED of the plurality of LEDs.

10

8. The LED lighting assembly of claim 1, wherein the third panel comprises a single multi-layered optical element.

9. The LED lighting assembly of claim 1, further comprising:

5 a mounting plate disposed over the first panel, wherein the power supply enclosure is mounted over the mounting plate.

10. The LED lighting assembly of claim 9, further comprising:

10 an adjustable mounting bracket configured to couple the lighting assembly to a billboard and/or a support member, wherein the adjustable mounting bracket is attached to the mounting plate.

15 11. The LED lighting assembly of claim 1, further comprising a second protrusion extending from the first major surface of the first panel, the first protrusion being parallel to the second protrusion, wherein the second protrusion is parallel to the first set of edges.

20 12. The LED lighting assembly of claim 11, wherein no protrusion is formed parallel to the second edge.

13. The LED lighting assembly of claim 11, wherein the first protrusion is spaced away from the first set of edges, and wherein the second protrusion is spaced away from the first set of edges.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 9,062,873 B2
APPLICATION NO. : 13/836710
DATED : June 23, 2015
INVENTOR(S) : Auyeung et al.

Page 1 of 1


It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Title Page

Item (12), Delete, "Auyeung", and insert --Auyeung et al.--.

Item (72), Inventors: Add "William Y. Hall".

Signed and Sealed this
Fifth Day of July, 2016

A handwritten signature in black ink, reading "Michelle K. Lee". The signature is fluid and cursive, with the first letters of each name being capitalized and prominent.

Michelle K. Lee
Director of the United States Patent and Trademark Office