

OTR TYRE FOR MINING



E-3 FD901



OTR

FILLING TYRE FOR MINING

E-3 FD901

Size	PR	Pattern Depth(mm)	Overall Diameter (mm)	Section Width (mm)	RIM	Load capacity (kgs)		Inflated Pressure(kpa)	SPEED KM/H	Tube/Tubless	Pattern
8.00-20NHS	16	30	900	240	6.5x20	4775	1200	10	10	TTF	E-3 FD901
8.25-20NHS	18	30	970	265	6.5x20	5280	980	10	10	TTF	E-3 FD901
36X12.5-20NHS	28	33	915	320	11x20	6875	1500	10	10	TTF	E-3 FD901
40X12.5-20NHS	32	33	1020	330	11x20	7220	1500	10	10	TTF	E-3 FD901
60X25-25NHS	52	50	1525	650	19.50/2.5x25	33035	1800	10	10	TTF	E-3 FD901



E3-MINING



MINING KING & INDUSTRIAL TIRE

Specially designed pattern with extra deep tread and compound for long mileage.
Widely reinforced tie bar with both center and shoulder part provides pattern strong property and durabilit.

E3-MINING

Size	PR	Pattern Depth(mm)	Overall Diameter (mm)	Section Width (mm)	RIM	Load capacity (kgs)		Inflated Pressure(kpa)		SPEED KM/H	Tube/Tu bress	Pattern
						SINGLE	DUAL	SINGLE	DUAL			
11.00-20	18	25	1105	293	8.0x20	3650	3150	910	840	40	TTF	E3-MINING
12.00-20	20	25	1145	315	8.5x20	4000	3450	880	810	40	TTF	E3-MINING
14.00-20	24	25	1265	375	10.0x20	6800	6200	870	810	40	TTF	E3-MINING
13.00-25	28	26	1300	350	8.5/1.5x20	5570		740		40	TTF	E3-MINING
14.00-24	32	28	1370	375	10.00/2.0x24	10600		1000		40	TTF	E3-MINING
14.00-25	36	28	1370	375	10.0/2.0x25	11200		1050		40	TTF	E3-MINING
16.00-25	40	32	1495	430	11.25/2.0x25	14500		1075		40	TTF	E3-MINING

OTR TYRE FOR MINING



E-4



E-4 OFF-THE-ROAD (EARTHMOVER) TYRE

DEEP TREAD (MINING SERVICE)
Suitable for wheel loader with deep tread and cut resistant compound for rocky surface and mining service.
Excellent traction and stability comfortable / Long life tread design

E-4

Size	PR	Pattern Depth(mm)	Overall Diameter (mm)	Section Width (mm)	RIM	Load capacity (kgs)	Inflated Pressure(kpa)	SPEED KM/H	Tube/Tubless	QTY/40HC	Pattern
23.5-25	20	55	1560	515	19.00/2.5x25	15200	650	50	TL/TTF	50	E-4



L-4



L-4 PREMIUM DESIGN OTR TYRE

L-4

Size	PR	Pattern Depth(mm)	Overall Diameter (mm)	Section Width (mm)	RIM	Load capacity (kgs)	Inflated Pressure(kpa)	SPEED KM/H	Tube/Tubless	QTY/40HC	Pattern
17.5-25	16	46	1400	445	14.00/1.5x25	7300	475	50	TL/TTF	100	L-4



E3/L3pro



E3/L3pro PREMIUM DESIGN OTR TYRE

Block non-directional pattern design,Excellent holding and traction performance With good controllability.

E3/L3pro

SIZE	PR	Pattern Depth(mm)	Overall Diameter (mm)	Section Width (mm)	RIM	Max Load(Kg)		Inflated Pressure (kpa)		Tube/Tubless	QTY/40HC	Pattern
						10km/h	50km/h	10km/h	50km/h			
17.5-25	16	30	1350	445	14.00/1.5x25	7300	4250	475	300	TTF	100	E3/L3pro
17.5-25	20	30	1350	445	14.00/1.5x25	8250	5000	575	400	TTF	100	E3/L3pro
23.5-25	20	32	1615	595	19.50/2.5x25	10900	7300	375	300	TTF	52	E3/L3pro
23.5-25	24	32	1615	595	19.50/2.5x25	12500	8000	475	350	TTF	52	E3/L3pro

OTR TYRE FOR LOADER



E3/L3



E3/L3 GENERAL BLOCK (S TREAD) LOADER TYRES

Specially desinged for cut and heat resistant compound.
Regular type of tread pattern suitable for hard rock surface and haulage service.

E3/L3

Size	PR	Pattern Depth(mm)	Overall Diameter (mm)	Section Width (mm)	RIM	Max Load(Kg)		Inflated Pressure (kpa)		Tube/Tubless	Tube/Tuble QTY/40HC	Pattern
						10km/h	50km/h	10km/h	50km/h			
15.5-25	16	24	1275	395	12.00/1.3x25	6750	3850	525	250	TTF/TL	130	E3/L3
17.5-25	16	28	1350	445	14.00/1.5x25	7300	4250	475	300	TTF/TL	100	E3/L3
17.5-25	20	28	1350	445	14.00/1.5x25	8250	5000	575	400	TTF/TL	100	E3/L3
17.5-25	24	28	1350	445	14.00/1.5x25	8250	5000	575	400	TTF/TL	100	E3/L3
20.5-25	20	31	1490	520	17.00/2.0x25	9500	6000	450	325	TTF/TL	72	E3/L3
20.5-25	24	31	1490	520	17.00/2.0x25	10300	6700	525	400	TTF/TL	72	E3/L3
23.5-25	20	33	1615	595	19.50/2.5x25	10900	7300	375	300	TTF/TL	52	E3/L3
23.5-25	24	33	1615	595	19.50/2.5x25	12500	8000	475	350	TTF/TL	52	E3/L3
23.5-25	28	33	1615	595	19.50/2.5x25	12500	8000	475	350	TTF/TL	52	E3/L3
26.5-25	24	37	1750	675	22.00/3.0x25	14000	9250	400	300	TTF/TL	36	E3/L3
26.5-25	28	37	1750	675	22.00/3.0x25	15500	10000	475	350	TTF/TL	36	E3/L3
26.5-25	32	37	1750	675	22.00/3.0x25	15500	10000	475	350	TTF/TL	36	E3/L3
29.5-25	28	38	1875	750	25.00/3.5x25	17500	11500	425	325	TTF/TL	27	E3/L3
29.5-25	32	38	1875	750	25.00/3.5x25	20000	12950	525	400	TTF/TL	27	E3/L3
29.5-29	34	61	1975	750	25.00/3.5x29	21200	14000	525	400	TTF/TL	22	E3/L3
37.25-35	36	53	2390	945	31.00/4.0x35	30700	19500	450	325	TTF/TL	16	E3/L3
13.00-25	28	28	1300	335	8.50x25	5010	/	740	/	TTF/TL	128	E3/L3
14.00-24	16	25	1370	375	10.00x24	7300	4000	550	375	TTF/TL	126	E3/L3
14.00-24	20	25	1370	375	10.00x24	8500	4625	700	475	TTF/TL	126	E3/L3
14.00-24	24	25	1370	375	10.00x24	9500	5150	850	575	TTF/TL	126	E3/L3
14.00-24	28	25	1370	375	10.00x24	10000	5600	925	650	TTF/TL	126	E3/L3
16.00-24	20	27	1495	430	11.25/2.0x24	10600	6000	650	475	TTF/TL	88	E3/L3
16.00-24	24	27	1495	430	11.25/2.0x24	11500	6700	750	575	TTF/TL	88	E3/L3
16.00-24	28	27	1495	430	11.25/2.0x24	11500	6700	750	575	TTF/TL	88	E3/L3
16.00-25	28	24	1495	430	11.25/2.0x25	11500	6700	750	575	TTF/TL	80	E3/L3
16.00-25	32	24	1495	430	11.25/2.0x25	12500	7300	875	650	TTF/TL	80	E3/L3
18.00-25	28	30	1615	500	13.00/2.5x25	13600	8000	650	500	TTF/TL	49	E3/L3
18.00-25	32	30	1615	500	13.00/2.5x25	15000	8750	750	575	TTF/TL	49	E3/L3

OTR TYRE FOR LOADER

18.00-25	36	30	1615	500	13.00/2.5x25	16000	9250	850	625	TTF/TL	49	E3/L3
18.00-25	40	30	1615	500	13.00/2.5x25	17000	9700	950	700	TTF/TL	49	E3/L3
7.50-16	10	14	810	215	6.00/Gx16	710	/	205	/	TTF	750	E3/L3
8.25-16	12	16	865	235	6.50x16	795	/	250	/	TTF	590	E3/L3
9.00-16	14	16	890	255	6.50x16	1120	/	260	/	TTF	460	E3/L3
12.00-16	16	20	840	240	6.50Hx16	1705	/	680	/	TTF/TL	340	E3/L3
14/90-16	12	16	896	215	8.5Hx16	1200	/	270	/	TTF/TL	320	E3/L3
20.5/70-16	14	16	915	353	8.50x16	1600	/	390	/	TTF	240	E3/L3
23.5/70-16	14	16	1075	410	10.00x16	1600	/	390	/	TTF	240	E3/L3
16/70-20 (405/70-20)	16	25	1075	410	13.00/1.3x20	5600	3350	450	350	TTF	180	E3/L3
16/70-24 (405/70-24)	16	25	1175	410	13x20	5600	4000	450	370	TTF	150	E3/L3



E3/L3NEW



E3/L3NEW NEW DESIGN LOADER MASTER TYRE (OTR)

NEW Z tread tyre for low intensity application of Loader/Earthmover/Grader.

E3/L3NEW

Size	PR	Pattern Depth(mm)	Overall Diameter (mm)	Section Width (mm)	RIM	Max Load(Kg)		Inflated Pressure (kpa)		Tube/Tubless	Tube/Tuble QTY/40HC	Pattern
						10km/h	50km/h	10km/h	50km/h			
20.5/70-16	14	16	915	353	10.00X16	1600	/	390	/	TTF	240	E3/L3NEW
16/70-20	18	25	1075	410	13.00x20	3350	/	450	/	TTF	170	E3/L3NEW
15.5-25	16	25	1275	395	12.00/1.3x25	6750	3850	525	250	TTF/TL	130	E3/L3NEW
17.5-25	16	30	1350	445	14.00/1.5x25	7300	4250	475	300	TTF/TL	100	E3/L3NEW
17.5-25	20	30	1350	445	14.00/1.5x25	8250	5000	575	400	TTF/TL	100	E3/L3NEW
17.5-25	24	30	1350	445	14.00/1.5x25	8250	5000	575	400	TTF/TL	100	E3/L3NEW
20.5-25	20	31	1490	520	17.00/2.0x25	9500	6000	450	325	TTF/TL	72	E3/L3NEW
20.5-25	24	31	1490	520	17.00/2.0x25	10300	6700	525	400	TTF/TL	72	E3/L3NEW
23.5-25	20	35	1615	595	19.50/2.5x25	10900	7300	375	300	TTF/TL	52	E3/L3NEW
23.5-25	24	35	1615	595	19.50/2.5x25	12500	8000	475	350	TTF/TL	52	E3/L3NEW
26.5-25	24	37	1750	675	22.00/3.0x25	14000	9250	400	300	TTF/TL	36	E3/L3NEW
26.5-25	28	37	1750	675	22.00/3.0x25	15500	10000	475	350	TTF/TL	36	E3/L3NEW
29.5-25	28	35	1875	750	25.00/3.5x25	17500	11500	425	325	TTF/TL	27	E3/L3NEW
29.5-25	32	35	1875	750	25.00/3.5x25	20000	12950	525	400	TTF/TL	27	E3/L3NEW
18.00-25	40	30	1615	500	13.00/2.5x25	17000	9700	950	700	TTF/TL	49	E3/L3NEW

OTR TYRE FOR MINING



L5



L5NEW



EXTRA HIGH TREAD (ROCK SERVICE)

Suitable for wheel loader with extra deep tread and cut resistant compound for rocky surface and mining service.
Excellent traction and stability comfortable /Long life tread design.

L5 / L5NEW

Size	PR	Pattern Depth(mm)	Overall Diameter (mm)	Section Width (mm)	RIM	Load capacity (kgs)	Inflated Pressure(kpa)	Tube/Tubless	Tube/Tube QTY/40HC	Pattern
17.5-25	16	62	1350	445	14.00/1.5x25	7300	475	TL/TTF	92	L5 / L5NEW
17.5-25	20	62	1350	445	14.00/1.5x25	8250	575	TL/TTF	92	L5 / L5NEW
20.5-25	20	69	1490	520	17.00/2.0x25	9500	450	TL/TTF	68	L5 / L5NEW
20.5-25	24	69	1490	520	17.00/2.0x25	10300	525	TL/TTF	68	L5 / L5NEW
23.5-25	20	76	1615	595	19.50/2.5x25	10900	375	TL/TTF	48	L5 / L5NEW
23.5-25	24	76	1675	595	19.50/2.5x25	12500	475	TL/TTF	48	L5 / L5NEW
26.5-25	28	87	1750	675	22.00/3.0x25	15500	475	TL/TTF	32	L5 / L5NEW
29.5-25	28	87	1875	750	25.00/3.5x25	17500	425	TL/TTF	24	L5
20.5/70-16	16	46	955	356	10.00Gx16	1785	320	TTF	240	L5
16/70-20	16	50	1090	410	13x20	3150	400	TTF	180	L5



G2/L2



G2/L2 SUPER GRADER LOADER SPECIAL OTR

Suitable for wheel loader with extra deep tread and cut resistant compound for rocky surface and mining service
Excellent traction and stability comfortable / Long life tread design.

Size	PR	Pattern Depth(mm)	Overall Diameter (mm)	Section Width (mm)	RIM	Max Load(Kg)		Inflated Pressure (kpa)		Tube/Tubless	Pattern
						50km/h	10km/h	50 Km/h	10Km/h		
1300-24	12	25	1300	350	10.00x24	2725	6210	300	560	TTF/TL	G2/L2
1400-24	16	25	1370	375	10.00x24	3650	7380	350	560	TTF/TL	G2/L2
15.5-25	12	23	1275	395	12.00/1.3X25	3250	5600	250	400	TTF/TL	G2/L2
17.5-25	16	26	1350	445	14.00/1.5X25	4250	7300	300	475	TTF/TL	G2/L2
20.5-25	20	29.5	1490	520	17.00/2.0x25	/	6780	/	280	TTF/TL	G2/L2
23.5-25	20	30.5	1615	597	19.50/2.5x25	4750	10900	200	320	TTF/TL	G2/L2

EXCAVATOR & SAND TRUCK TYRE



G2-TH



G2-ON



G2-TW



EXCAVATOR TYRE

Optimized pattern design for excavator.
Excellent abrasion and traction and self-cleaning.

G2-TH/G2-ON/G2-TW

Size	PR	Pattern Depth(mm)	Overall Diameter (mm)	Section Width (mm)	RIM	Load capacity (kgs)	Inflated Pressure(kpa)	SPEED KM/H	Tube/Tubless	Pattern
8.25-20	14	19	962	230	6.5	2204	725	50	TTF	G2-ON
9.00-20	14	20	1018	259	7	2500	700	50	TTF	G2-ON
9.00-20	16	20	1018	259	7	2900	810	50	TTF	G2-ON
10.00-20	16	21	1055	278	7.5	3150	750	50	TTF	G2-ON
11.00-20	16	22	1085	293	8	3350	725	50	TTF	G2-ON
9.00-20	14	19	1018	259	7	2500	700	50	TTF	G2-TW
10.00-20	16	19	1055	278	7.5	3150	750	50	TTF	G2-TW
7.50-16	14	20	805	215	6.00G	1500	730	50	TTF	G2-TH
8.25-16	16	20	855	235	6.50H	1800	730	50	TTF	G2-TH
9.00-16	16	20	890	255	6.50H	2120	730	50	TTF	G2-TH

FD-378



FD-308



FD-358



SAND TYRE

The combination of wide tread, round shoulder and streamlined pattern design provides stable ride, good floating force, excellent steering ability on sand ground road surface. With HEATMASTER compound for desert application.

FD-308/FD-358/FD-378

Size	PR	Pattern Depth(mm)	Overall Diameter (mm)	Section Width (mm)	RIM	Load capacity (kgs)	Inflated Pressure(kpa)	Tube/Tubless	Pattern
12.00-20	12	15	1150	290	8.5	4750	550	TTF	FD-358
14.00-20	18	9	1215	330	10x20	3270	425	TTF	FD-378/FD-308
16.00-20	18	10	1390	430	11.25x20	4800	400	TTF	FD-378

POR TYRE&ROLLER TYRE FO INDUSTRIAL



PORT TYRE：IND-4 PORT SPECIAL

Wide tread design with wearing resistance.
Thick tyre body with power torque quality.

IND-4										
Size	PR	Pattern Depth(mm)	Overall Diameter (mm)	Section Width (mm)	RIM	Load capacity (kgs)	Inflated Pressure(kpa)	SPEED KM/H	Tube/Tubless	Pattern
12.00-20NHS	20	45	1146	315	8.5x20	6325	900	25	TTF	IND-4
	24	45	1146	315	8.5x20	7750	1000	25	TTF	IND-4
12.00-24NHS	24	54	1250	315	8.5x24	10250	1000	25	TTF	IND-4
14.00-24NHS	28	57	1370	375	10.00x24	13500	1000	25	TTF/TL	IND-4
14.00-24NHS	32	57	1370	375	10.00x24	14700	1100	25	TTF/TL	IND-4
16.00-25	28	62	1550	430	11.25/2.0x25	14375	900	25	TL	IND-4
16.00-25	32	62	1550	430	11.25/2.0x25	15350	1000	25	TL	IND-4



R-3 MULTI-PURPOSE FLOATION TYRE

Wide Section for good flotation force and steering ability.
Special for desert transportation and road compactor application.

R-3									
Size	PR	Pattern Depth(mm)	Overall Diameter (mm)	Section Width (mm)	RIM	Load capacity (kg)	Inflated Pressure(kpa)	Tube/Tubless	Pattern
23.1-26	12	15	1500	595	DW20	3655	170	TL	R-3

UNDERGROUND OTR TYRE



SOOPER SCOOPER TYRE

Suitable for use in port and mining for long mileage.
Specially designed pattern with extra strong tread and reinforced sidewall protector

L-3S L-4S L-5S										
Size	PR	Pattern Depth(mm)	Overall Diameter (mm)	Section Width (mm)	RIM	Load capacity (kgs)	Inflated Pressure(kpa)	SPEED KM/H	Tube/Tubless	Pattern
10.00-20NHS	14	/	1055	278	7.5x20	4250	670	10	TTF	L-3S
10.00-20NHS	14	/	1075	278	7.5x20	4250	670	10	TTF	L-4S
10.00-20NHS	16	/	1075	278	7.5x20	4600	750	10	TTF	L-4S
12.00-24NHS	16	/	1265	315	8.5x24	6150	675	10	TTF	L-4S
14.00-24NHS	20	/	1265	315	8.5x24	6900	825	10	TTF	L-4S
	20	/	1265	315	8.5x24	6900	825	10	TTF	L-5S
	24	/	1265	315	8.5x24	7500	975	10	TTF	L-5S
	24	/	1370	375	10.00x24	9500	850	10	TTF	L-4S
17.5-25	20	/	1400	445	14.00/1.5x25	8250	575	10	TTF	L-5S
18.00-25	40	/	1675	500	13.00/2.5x25	17000	950	10	TL	L-5S
7.50-15NHS	14	/	810	215	6.5x15	2650	750	10	TTF	L-3S

BACKHOE INDUSTRIAL TYRE

R-1M DEEP TRACTION STAR

Best for tractor, telehandler, backhoe loader, compactor.
Excellent traction, self-cleaning and cutting resistance



R-1A TRACTION STAR (IND&AG)

Best for tractor, telehandler, backhoe loader, compactor.
Excellent traction, self-cleaning and cutting resistance



R-4pro TRACTION IMPLEMENT/BACKHOE

Excellent traction and flushing / Good resistance to cracking.
Strengthen and stabilize tread under severe operating condition.



R-4 INDUSTRIALTYRE

Very good traction and better tire life.
Good resistance to tearing and cracking.
Resistance to cuts, abrasions and high load capacity.



R-4TR INDUSTRIAL TYRE

Designed specifically for off-road dump trucks, these tires have a robust construction, are puncture-resistant, and possess exceptional load-bearing capacity. They feature a special tread compound with excellent cut resistance and wear resistance.



BACKHOE INDUSTRIAL TYRE



Size	PR	Pattern Depth(mm)	Overall Diameter (mm)	Section Width (mm)	Rim	Load capacity (kg)	Inflated Pressure(kpa)	TYPE TT/TL	Pattern
405/70-20 (16/70-20)	14	27	1075	410	13	3750	350	TL	R-1M
405/70-24 (16/70-24)	14	27	1175	410	13	3950	350	TL	R-1M
15.5/80-24 (400/80-24)	14	34	1240	394	W13	3150	350	TL	R-1A
10.5/80-18	10	22	912	274	9	1630	350	TL	R-4pro
12.5/80-18	12	25.5	1001	350	9	2625	370	TL	R-4pro
16.9-24	12	27	1236	429	DW15L	3250	260	TL	R-4
16.9-28	12	27	1435	430	DW15L	3450	260	TL	R-4
17.5L-24	10	27	1241	445	DW15L	1900	190	TL	R-4
21L-24	14	27	1402	533	DW18	3075	250	TL	R-4
19.5L-24	12	27	1314	495	DW16	3455	230	TL	R-4
18.4-26	12	24	1450	467	DW16	2985	230	TL	R-4
19.5L-24	12	28	1340	495	DW16	3455	230	TL	FC-902
19.5L-24	12	28	1340	495	DW16	3455	230	TL	FC-903
12.5/80-18	12	26	985	308	W9	2725	370	TL	R-4TR
14.9-24	12	25.5	1241	378	W13	2900	290	TL	R-4TR
16.9-24	12	26.5	1309	429	W15L	3250	260	TL	R-4TR
16.9-28	12	26.5	1410	429	W15L	3450	260	TL	R-4TR
17.5L-24	10	26.5	1241	445	W15L	2800	220	TL	R-4TR
19.5L-24	12	27	1314	495	W16L	3450	230	TL	R-4TR
18.4-24	10	27.5	1375	467	W16L	3750	250	TL	R-4TR
18.4-28	10	27.5	1477	467	W16L	4000	250	TL	R-4TR
21L-24	12	28	1378	533	W18L	3875	220	TL	R-4TR
21L-24	16	28	1378	533	W18L	4500	280	TL	R-4TR
405/70-20	14	33.3	1076	407	13	3250	350	TL	R-4TR
405/70-24	14	33.3	1178	407	13	3550	400	TL	R-4TR

SKID STEER INDUSTRIAL TYRE

SKS-1 STANDARD

Optimized pattern design for loader/grader with excellent traction and self-cleaning in a muddy ground.



SKS-2 ADVANCED

Optimized pattern design for loader/grader with excellent traction and self-cleaning in a muddy ground



SKS-3 EXTRA DEEP

Application to Skid Steer loader and scraper tyre for hard working area. Good wear resistance, with extra deep tread and side-skidding resistance.



SKS-4 ALL TERRAIN

For loaders and dozers operations on rock, coal and earth. Extra wide tread profile for better land ratio and High floating force.



SKS-5 DEEP

Application to Skid Steer loader and scraper tyre for hard working area. Good wear resistance, with extra deep tread and side-skidding resistance



SKS-6 NEW PRIMIUM

For loaders and dozers operations on rock, coal and earth. Separate lugs and tapered for greater traction and self-cleaning. Extra wide tread profile for better land ratio and High floating force




SKID STEER INDUSTRIAL TYRE



Size	PR	Pattern Depth(mm)	Overall Diameter (mm)	Section Width (mm)	Rim	Load capacity (kg)	Inflated Pressure (kpa)	SPEED KM/H	TYPR TT/TL	Pattern
10-16.5	10	18	779	261	8.25	2170	520	10	TL	SKS-1
12-16.5	12	18	830	312	9.75	2900	550	10	TL	SKS-1
14-17.5	14	25	922	351	10.5	3875	550	10	TL	SKS-1
11L-16	12	15	838	279	8	1250	440	10	TL	SKS-1
15-19.5	14	26	1019	389	11.75	4565	485	10	TL	SKS-1
23x8.50-12	8	13.3	574	213	7.00JA	975	450	10	TL	SKS-1
27x8.50-15	8	14.2	678	213	7LB	1305	410	10	TL	SKS-1
27x10-12	8	14	701	264	8LB	898	410	10	TL	SKS-1
27X10.5-16.5	8	16	685.5	261.6	8LB	898	410	10	TL	SKS-1
33x15.5-16.5	14	20.3	831	389	12	3100	410	11	TL	SKS-1
31X15.5-15	8	26	792	391	13LB	1250	310	5	TL	SKS-1
10-16.5	12	26	795	279	8.25	2140	520	10	TL	SKS-2
12-16.5	14	32	835	325	9.75	2885	550	10	TL	SKS-2
10-16.5	12	34	792	265	8.25	2170	520	10	TL	SKS-3
12-16.5	14	36	826	300	9.75	2865	550	10	TL	SKS-3
11L-16	12	35	838	279	8	1395	420	10	TL	SKS-3
12.5/80-18	14	36	965	306	W9	3075	620	10	TL	SKS-3
14-17.5	16	36	945	349	10.5	3875	550	10	TL	SKS-3
10-16.5	12	30	820	264	8.25	1930	520	10	TL	SKS-4
12-16.5	14	34	831	325	9.75	2865	550	10	TL	SKS-4
10-16.5	12	34	792	265	8.25	2170	520	10	TL	SKS-5
12-16.5	14	36	826	300	9.75	2865	550	10	TL	SKS-5
12.5/80-18	14	36	965	306	W9	3075	620	10	TL	SKS-5
16.9-28	12	25	435	430	15	3450	260	10	TL	SKS-5
10-16.5	12	26	820	264	8.25	1930	520	10	TL	SKS-6
12-16.5	14	28	831	325	9.75	2865	550	10	TL	SKS-6
12.5/80-18	14	36	965	306	W9	3075	620	10	TL	SKS-6
14-17.5	16	36	945	349	10.5	3875	550	10	TL	SKS-6
15-19.5	14	26	1019	389	11.75	4565	485	10	TL	SKS-6

FORKLIFT PNEUMATIC SOLID TYRE

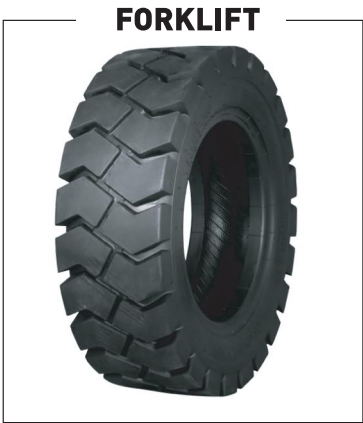

FORKLIFT TYRE						FORKLIFT				
Developed for heavy use on forklifts and other industrial vehicles. With its wide and extra deep tread provides stronger traction, longer life and puncture resistance.										
Size	PR	Overall Diameter (mm)	Section Width (mm)	Rim	Pressure Kpa	load kg		SPEED	PATTERN	TYPE
						Drive	Steer			
4.00-8	8	423	108	2.50C	960	/	782	25KM/H	FORKLIFT	TT
5.00-8	10	469	131	3.00D	1000	/	950	25KM/H	FORKLIFT	TT
6.00-9	10	545	160	4.00E	860	1515	1280	25KM/H	FORKLIFT	TT
6.50-10	12	597	178	5.00F	970	1935	1635	25KM/H	FORKLIFT	TT
7.00-12	12	683	192	5.00S	860	2445	2065	25KM/H	FORKLIFT	TT
	14	683	192	5.00S	1000	2670	2255	25KM/H	FORKLIFT	TT
7.00-15	12	762	203	6.00	860	2835	2395	25KM/H	FORKLIFT	TT
	14	762	203	6.00	930	3350	2575	25KM/H	FORKLIFT	TT
7.50-15	12	808	215	6.00G	790	3140	2650	25KM/H	FORKLIFT	TT
	14	808	215	6.00G	930	3625	2800	25KM/H	FORKLIFT	TT
8.25-15	14	847	236	6.50BD	830	3830	3235	25KM/H	FORKLIFT	TT
7.50-16	16	834	215	6.00G	950	3225		25KM/H	FORKLIFT	TT
28X9-15	14	706	221	7.00BD	970	3075	2595	25KM/H	FORKLIFT	TT
250-15	16	735	250	7.50BD	930	3855	3265	25KM/H	FORKLIFT	TT
300-15	20	840	300	8.00BD	930	5940	4990	25KM/H	FORKLIFT	TT
9.00-20	14	1038	259	7.0	760	4425		25KM/H	FORKLIFT	TT
10.00-20	16	1073	278	7.5	790	5140		25KM/H	FORKLIFT	TT
11.00-20	16	1104	293	8.0	760	5460		25KM/H	FORKLIFT	TT
12.00-20	18	1146	315	8.5	790	4670		25KM/H	FORKLIFT	TT
	20	1146	315	8.5	890	6874		25KM/H	FORKLIFT	TT

FORKLIFT&SKID STEER TYRE

12.00-24	20	1250	270	8.5	1000	7500		25KM/H	FORKLIFT	TT
14.00-24	28	1368	375	4.33R	1030	9500		25KM/H	FORKLIFT	TT
18x7-8	16	465	168	4.33R	1030	2280	1925	25KM/H	FORKLIFT	TT
21x8-9	14	533	203	6.00E	1000	2115	1785	25KM/H	FORKLIFT	TT
23x9-10	16	584	229	6.50F	1030	2720	2305	25KM/H	FORKLIFT	TT
27x10-12	18	682	254	8.00G	1030	3355	2835	25KM/H	FORKLIFT	TT
32x12.1-15	24	826	305	9.75BD	1030	4240	4240	25KM/H	FORKLIFT	TT



SOLID SKID STEER TYRE: COMBO TYPE&RIM TYPE							FC206		
Size	RIM	Pattern	Overall Diameter mm	Section Widthmm	Drive Width mm	Load Capacity(kg)			
						10km/h		26km/h	
						Drive	Steer	Drive	Steer
10-16.5(31x6x10)	10-16.5	FC206	756	255	239	4230	3080	3630	2680
12-16.5(33x6x11)	12-16.5	FC206	820	273	264	4575	3875	3815	3400
30x10-16	6	FC206	744	234	234	4326	3245	3933	2950
33x12-20	8	FC206	833	276	276	5929	4447	5390	4045
10-16.5	8	FC206	756	255	239	4230	3080	3630	2680
12-16.5	9.75	FC206	820	273	264	4575	3875	3815	3400

SHOCK ABSORPTION SOLID TYRE										FC209		
Size	Rim	Pattern	Overall Diameter mm	Section Width mm	Drive Width mm	Load Capacity(kg) -Balance Forklift				Other Forklift 16km/h		
						10km/h		16km/h			26km/h	
						Drive Steer		Drive Steer		Drive Steer		
6.50-10(with hole)	5	FC209	570	165	165	2840	2110	2545	1910	2370	1780	1820
28x9-15(with hole)	7	FC209	693	216	216	4090	3270	3945	2960	3675	2755	2820

EXTRA PREMIUM SOLID TYRE



FC210



EXTRA PREMIUM SOLID TYRE

FC210

Size	Rim	Pattern	Overall Diameter mm	Section Width mm	Drive Width mm	Load Capacity(kg) -Balance Forklift						Other Forklift 16km/h
						10km/h		16km/h		26km/h		
						Drive	Steer	Drive	Steer	Drive	Steer	
15x4.5-8	3	FC210	376	110	104	905	725	675	655	805	605	625
5.00-8	3	FC210	457	125	117	1210	970	1175	880	1095	820	840
16x6-8	4.33	FC210	412	152	145	1500	1200	1445	1085	1345	1010	1035
18x7-8	4.33	FC210	457	160	150	2350	1880	2265	1700	2110	1585	1620
6.00-9	4	FC210	528	148	138	1920	1535	1855	1390	1730	1295	1325
21x8-9	6	FC210	518	194	185	2810	2250	2715	2035	2530	1895	1940
6.50-10	5	FC210	572	168	154	2840	2110	2545	1910	2370	1780	1820
23x9-10	6.5	FC210	577	208	198	4005	3205	3845	2885	3605	2705	2765
200/50-10	6.5	FC210	455	196	186	2370	1900	2290	1720	2135	1605	1630
7.00-12	5	FC210	654	178	165	3015	2410	2910	2185	2710	2035	2075
23x10-12	8	FC210	590	230	219	3980	3420	3820	3210	3586	3010	2980
7.00-15	5.5	FC210	714	190	178	3590	2870	3465	2600	3225	2420	2475
28x9-15	7	FC210	691	219	207	4090	3270	3945	2960	3675	3755	2820
8.25-15	6.5	FC210	818	210	199	4940	3950	4765	3575	4440	3330	3045
250-15	7.5	FC210	724	234	222	4366	3400	4220	3160	3930	2955	3010
300-15	8	FC210	819	264	251	5990	4700	5780	4335	5380	4037	4130
12.00-20	8.0/8.5	FC210	1090	302	281							

SOLID OTR TYRE

FC206



FC207



FC202



FC204



L5



FORKLIFT TYRE

FC202 / FC204 / FC206 / FC207 / L5

Developed for heavy use on forklifts and other industrial vehicles. With its wide and extra deep tread provides stronger traction, longer life and puncture resistance.

Size	Rim	Pattern	Overall Diameter mm	Section Width mm	Drive Width mm	Load Capacity(kg) -Balance Forklift						Other Forklift 16km/h
						10km/h		16km/h		26km/h		
						Drive	Steer	Drive	Steer	Drive	Steer	
6.50-16	5.5	FC202	723	157	148	2950	2215	2810	2110	2605	1955	2080
7.50-16	5.5	FC202	787	187	174	3910	3130	3780	2835	3520	2640	2700
	6											
	6.5											
8.25-16	6.5	FC204	825	218	211	4980	4000	4720	3750	4440	3330	2850
9.00-16	6.5	FC202	844	216	201	5135	4110	4965	3725	4625	3470	3550
20.5/70-16	10	FC206	895	284	277	6450	5350	6150	4890	5870	4550	4700
16/70-20	13	FC206	1016	388	377	4075	3875	3815	3650	3615	3400	6950
14.00-20	10	FC207	1220	321	298	10800	8640	10430	7840	9730	7315	7450
14.00-24	10	FC207	1348	323	305	12760	10210	12320	9240	11460	8595	8800
17.5-25	14.00/1.5	FC207	1327	413	394	13000	10500	11000	8000	8500	7000	12220
20.5-25	17.00/2.0	FC207	1350	485	485	15000	11000	13000	8560	10000	7500	/
23.5-25	19.50/2.5	FC207	1570	543	520	19500	14500	17000	13000	13500	11500	21260
26.5-25	22.00/3.0	L-5	1680	620	620	39300	31400	/	/	35400	26600	/

SOLID FORKLIFT TYRE



SOLID OTR TYRE						FC202 / FC203 / FC221 / FC207 / FC210						
Size	Rim	Pattern	Overall Diameter mm	Section Width mm	Drive Width mm	Load Capacity(kg) -Balance Forklift						Other Forklift 16km/h
						10km/h		16km/h		26km/h		
						Drive	Steer	Drive	Steer	Drive	Steer	
15x41/2-8	3.00	FC202	370	109	100	905	725	675	655	805	605	625
(125/75-8)		FC203										
15x6 1/2-8	5.00	FC221	377	165	156	1010	820	825	805	910	670	680
5.00-8	3.00	FC202	455	125	117	1210	970	1175	880	1095	820	840
		FC203										
16x6-8 (150/75-8)	4.33	FC202	404	147	135	1500	1200	1445	1085	1345	1010	1035
18x7-8 (180/70-8)	4.33	FC202	440	155	150	2350	1880	2265	1700	2110	1585	1620
		FC203										
18x7-8(宽体)	4.33	FC203	449	172	166	2720	2110	[480	1980	2400	1850	1900
18x7-10	4.50	FC202	455	154	148	2980	2450	1780	2360	2800	2250	2200
6.00-9	4.00	FC202	515	143	131	1920	1535	1855	1390	1730	1295	1325
		FC203										
7.00-9	5.00	FC202	536	157	150	2370	2015	2805	1925	2370	1750	1785
		FC203										
21x8-9 [(200/75-9)	6.00	FC202	505	192	182	2810	2250	2715	2035	2530	1895	1940
200/50-10	6.50	FC202	441	187	127	2370	1900	2290	1720	2135	1605	1630
6.50-10	5.00	FC202	566	153	145	2840	2110	2545	1910	2370	1780	1820
		FC203										
23x9-10 (225/75-10)	6.50	FC202	561	191	184	4005	3205	3845	2885	3605	2705	2765

SOLID FORKLIFT TYRE

7.00-12	5.00	FC202	643	176	163	3015	2410	2910	2185	2710	2035	2075
		FC203										
23x10-12	8.00	FC202	586	227	224	3980	3420	3820	3210	3586	3010	2980
8.25-12	5.00	FC202	696	189	181	3326	2660	3215	2410	2995	2245	2295
		FC203										
27 x 10-12 (250/75-12)	8.00	FC202	661	232	221	4465	3570	4315	3235	4020	3015	3080
6.00-15	4.50	FC207	653	151	135	2830	2095	2705	2000	2455	1820	1675
28x9-15 (8.15-15) (225/70-15)	7.00	FC202	691	208	196	4090	3270	3945	2960	3675	2755	2820
		FC203										
250-15 (250/70-15)	7.50	FC202	693	228	217	4366	3400	4220	3160	3930	2955	3010
7.00-15	5.50	FC202	711	187	173	3590	2870	3465	2600	3225	2420	2475
7.50-15	5.50	FC202	752	189	180	3690	2950	3425	2570	ai90	2395	2450
8.25-15	6.50	FC202	810	204	192	4940	3950	4765	3575	4440	3330	3045
		FC203										
300-15 (315/70-15)	8.00	FC202	788	238	234	5990	4700	5780	4335	5380	4037	4130
28 x 12.5-15 (345/45-15)	9.75	FC210	706	300		5735	4590	5540	4165	5170	3890	3955
355/65-15	9.75	FC202	818	302	279	6140	4940	6300	5650	5950	4190	5450
8.25-20	6.50	FC202	933	212	200	5425	4340	5420	3930	4880	3735	3475
	7.00											
9.00-20	6.50	FC202	948	222	210	6450	5160	6235	4675	5805	4355	4450
	7.00											
10.00-20	7.50	FC202	1038	264	255	7240	5795	6995	5240	6610	4885	4995
	8.00											
11.00-20	7.50	FC202	1038	264	255	7560	6050	7300	5490	6810	5120	5210
	8.00											
12.00-20	8.00	FC202	1086	282	271	8800	7000	8500	6925	8000	6450	6595
	8.50											

AGRICULTURAL TYRE



R-1 SUPER FARM TYRE FOR DRIVE WHEEL

Tractor tire for drive wheel.
Powerful traction and good cutting resistance,self-cleaning.

Size	PR	Overall Diameter (mm)	Section Width (mm)	RIM	Load capacity (kg)	Inflated Pressure (kpa)	Pattern	Pattern Depth(mm)
4.00-8	4	435	110	3.00D	280	180	R-1	15
4.00-10	4	485	112	3.00D	500	185	R-1	17
4.00-12	4	535	112	3.00D	550	205	R-1	17
4.00-16	4	640	110	3.00D	609	270	R-1	17
4.00-19	4	720	110	3.00D	739	345	R-1	22
5.00-12	6	590	145	4.00E	320	210	R-1	19
5.00-15	6	685	140	4.00J	465	420	R-1	18
5.50-17	6	750	138	1.00E	400	280	R-1	20
6-12	4、 6	577	155	5	272	190	R-1	16
6.00-12	8	640	165	4.50E	450	300	R-1	23
6.00-14	8	670	150	4.50E	495	250	R-1	24
6.00-16	8	745	165	4.50E	550	300	R-1	23
6.50-16	8	765	180	5.00F	620	300	R-1	22
8.00x408	10	1181	116	4.50E	1300	460	R-1	28
7.00-12	6	680	190	5.00F	450	250	R-1	30
7-14	4、 6、 8	691	183	6	355	160	R-1	16.5
7-16	4、 6、 8	742	183	6	387	160	R-1	16.5
7.50-16	8	810	205	5.5F	730	260	R-1	22
7.50-20	8	910	205	5.5F	860	260	R-1	22
8-16	6、 8、 10	790	211	6	841	211	R-1	28
8.3-20	8	895	210	W7	785	300	R-1	33
8.3-24	8	995	210	W7	920	300	R-1	27
8.5-20	8	875	195	W7	780	250	R-1	33
9.5-16	6	860	240	W8	800	210	R-1	25
9.5-16 (WIDEN)	8、 10	850	255	W8	570	210	R-1	23

AGRICULTURAL TYRE

9.5-20	8	950	240	W8	955	280	R-1	28
9.5-24	8	1050	240	W8	1110	280	R-1	31
9.5-28	8	1140	240	W8	1185	280	R-1	31
9.5-32	8	1250	240	W8	1260	280	R-1	40
10.0/75-15.3	10	892	260	9	1625	390	R-1	26
11.2-20	8	1005	285	W10	1085	240	R-1	32
11.2-24	10	1105	285	W10	1225	240	R-1	22
11.2-28	10	1205	285	W10	1305	240	R-1	32
11-32	10	1460	305	W10	1080	160	R-1	36
11.2-38	10	1448	284	10	1180	221	R-1	32
12-38	8、 10	1575	330	DW11	1570	140	R-1	28.5
12.4-24	10	1160	315	W11	1415	230	R-1	28
12.4-28	10	1260	315	W11	1510	230	R-1	32
12/13.6-38	10	1575	330	W11	1930	200	R-1	35
12-38	8、 10	1575	330	DW11	1570	140	R-1	28.5
12.4-48	14、 16	1820	315	W11	3850	320	R-1	34
12.4-54	14、 16	1921	315	W11	4000	320	R-1	34
13.6-16	8、 10、 12	1000	345	W12	1060	150	R-1	38
13.6-24	10	1210	345	W12	1545	210	R-1	28
13.6-24A	12	1179	398	13SDC	1790	250	R-1	28.5
13.6-28	10	1310	345	W12	1645	210	R-1	33
13.6-38	10	1548	328	W12	1548	250	R-1	34
13.8-20	8、 10、 12	1094	328	W12	/	/	R-1	35
14.9-24	10	1265	378	W13	1990	230	R-1	25
14.9-26	10	1315	378	W13	2055	230	R-1	25
14.9-28	10	1365	378	W13	2120	230	R-1	30
14.9-30	10	1415	378	W13	2190	230	R-1	35
14.9-48	14、 16	1870	378	W13	1650	220	R-1	34
15-24	10	1330	410	DW14	2800	280	R-1	35
15L-24	12	1135	375	W13	2110	280	R-1	38
405/70-20	14	1076	407	13	3250	350	R-1	37
405/70-24	14	1178	407	13	3550	350	R-1	37
15.5/80-24	14	1240	375	W13	3150	350	R-1	35
15.5-38	10	1570	395	W14	2320	230	R-1	34
16.9-24	10	1335	430	W15L	2230	200	R-1	33
16.9-26	12	1380	429	W15L	2560	240	R-1S	45
16.9-28	10	1435	430	W15L	2380	200	R-1	30
16.9-30	12	1485	430	W15L	2730	240	R-1	34
16.9-34	12	1585	430	W15L	2820	230	R-1	34

AGRICULTURAL TYRE

16.9-38	12	1685	430	W15L	2880	230	R-1	36.5
18.4-26	12	1450	467	DW16	2985	230	R-1	35
18.4-28	12	1501	476	W13	2800	134	R-1	40
18.4-30	12	1550	467	W16L	3180	230	R-1	34
18.4-34	12	1655	467	W16L	3375	230	R-1	36
18.4-38	12	1755	467	W16L	3575	230	R-1	36
18.4-42	10	1857	467	W16	3330	180	R-1	35
20.8-38	12	1835	528	W18L	4450	240	R-1	37
20.8-42	10、 12	1895	528	W18L	3750	190	R-1	41
23.1-26	12	1450	467	DW16	2985	230	R-1	42
29.5-25	20	1850	750	25.00/3.5	7000	240	R-1	55



MR-1



MR-1

Size	PR	Overall Diameter (mm)	Section Width (mm)	Rim	Load capacity (kg)	Inflated Pressure (kpa)	Pattern	Pattern Depth(mm)
14.9-38	12	1615	378	W13	2460	230	MR-1	30
15.5-38	12	1570	395	W14	2320	230	MR-1	34
18.4-30	12	1550	467	W16L	3180	230	MR-1	35
18.4-34	12	1655	467	W16L	3375	230	MR-1	36
20.8-34	14	1735	528	W18L	3780	200	MR-1	38
23.1-30	16	1705	587	DW20	4570	230	MR-1	42
24.5-32	16	1805	622	DW21	4994	210	MR-1	45
30.5L-32	16	1820	775	DH27	4745	140	MR-1	45

AGRICULTURAL TYRE

F-2(4RIB)



F-2(3RIB)



F-2 TRIPLE RIB FARM STEERING

Better Steering with good stability / Self cleaning and damage resistance.
Better tire life / High load capacity.

Size	PR	Overall Diameter (mm)	Section Width (mm)	Rim	Load capacity (kg)	Inflated Pressure (kpa)	Pattern	Pattern Depth(mm)
4.00-12	6	535	110	3.00D	250	340	F-2	7.5
4.00-14	6	590	110	3.00D	300	340	F-2	8
4.00-16	6	655	122	3.00D		340	F-2	8
5.00-15	6	640	130	3.00D	325	280	F-2	11
5.50-16	6	710	150	4.00E	525	370	F-2	11
6.00-16	8	740	160	4.00E	560	450	F-2	12
6.50-16	8	760	175	4.50E	615	420	F-2	13
6.50-20	8	860	180	5.00F	865	360	F-2	13
7.5L-15	8	745	208	6LB	750	370	F-2	13
7.50-16	8	810	205	5.50F	870	370	F-2	14
7.50-18	8	860	205	5.50F	850	370	F-2	14
9.00-16	8	880	210	6.50H	1200	400	F-2	14
9.5L-15	8	780	240	8LB	850	310	F-2	14
11L-15	8	810	280	8LB	950	340	F-2	14
10.00-16(3/4RIB)	10	910	275	W8L	1120	340	F-2	23
10.00-16	10	910	275	W8L	1120	340	TF-2	18
11.00-16(3/4 RIB)	10	970	315	W10L	1320	310	F-2	17
14L-16.1TL	10、 12	940	355	16.1x11LB	/	/	F-2 4R	/
180/70-12TT	6	605	190	5.50F	/	/	F-2M	/

AGRICULTURAL TYRE



R-2 HARVESTER TYRE

Larger traction tire for drive wheel.
Powerful traction, excellent wear resistance and self-cleaning

Size	PR	Overall Diameter (mm)	Section Width (mm)	Rim	Load capacity (kg)	Inflated Pressure (kpa)	Pattern	Pattern Depth(mm)
11-32	10	1460	305	W10	300	1485	R-2	50
12.4-26	8	1265	315	W11	270	1660	R-2	50
12.4-28	10	1293	315	W11	270	1660	R-2	50
12.4-28	10	1270	315	W11	230	1510	R-2	52
12.4-48	12	1800	305	W11	280	3560	R-2	66
13.6-24	10	1210	345	W12	360	2200	R-2	56
14.9-24	10	1295	378	W13	230	1910	R-2	56
14.9-26	10	1335	378	W13	230	1960	R-2	56
15L-24	10	1352	410	Dwl4	250	2800	R-2	65
16.9-28	12	1458	430	W15L	250	2560	R-2	62
16.9-34	12	1600	430	W15L	210	2600	R-2	65
18.4-30	12	1565	467	W16L	190	2800	R-2	68
18.4-38	12	1800	467	W16L	230	3475	R-2	68
18.4-42	12	1400	467	W16	210	3700	R-2	75
19.5L-24	12	1350	495	CW16	210	2140	R-2	65
20.8-38	12	1870	528	W18L	200	3900	R-2	75
23.1-26	12	1660	587	Dw20	170	3246	R-2	75
28L-26	12	1648	715	Dw25	170	3610	R-2	75
420/85D26	12	1354	378	W15L	230	2000	R-2	60
420/85D28	12	1404	378	W15L	230	2120	R-2	60
420/85D30	12	1419	378	W15L	280	2400	R-2	60
460/85D38	16	1702	467	W16L	180	2990	R-2	75
520/85D42	16	1950	530	W18L	160	4200	R-2	70

AGRICULTURAL TYRE



PR-1 SUPER PADDY FIELD TYRE

Powerful traction, excellent driving stability and Steering Accuracy.
Longer life and High durability, Wear resistance, Outstanding Cold & Heat resistance.

Size	PR	Overall Diameter (mm)	Section Width (mm)	Rim	Load capacity (kg)	Inflated Pressure (kpa)	Pattern	Pattern Depth(mm)
600-12	6	690	165	5.00F	425	270	PR-1	50
650-16	6	830	165	5.00F	565	250	PR-1	63
750-16	8	890	195	5.50F	750	300	PR-1	70
8.3-20	8	950	210	W7	970	270	PR-1	68
8.3-24	8	1050	210	W7	1135	270	PR-1	70
9.5-24	8	1150	240	W8	1315	240	PR-1	80
12.4/11.2-24	10	1205	285	W10	1465	210	PR-1	80
11-32	10	1460	305	W10	1080	160	PR-1	85
12.4-26	8	1265	315	W11	2010	260	PR-1	85
12.4-28	10	1315	315	W11	1785	200	PR-1	92
13.6-24	10	1210	345	W12	2220	360	PR-1	77
13.6-38	10	1710	345	W12	2780	250	PR-1	77
14.9-24	10	1265	378	W13	1760	180	PR-1	90
14.9-26	10	1419	378	W13	2040	230	PR-1	80
14.9-28	10	1404	378	W13	2120	230	PR-1	80
14.9-30	10	1495	378	W13	3065	260	PR-1	80
16.9-28	10	1478	430	W15L	2580	230	PR-1	80
16.9-30	10	1585	430	W15	2465	200	PR-1	90
16.9-34	10	1670	430	W15	3385	220	PR-1	90
18.4-30	10	1550	467	W16	2815	230	PR-1	81
18.4-34	12	1755	467	W16	3165	180	PR-1	90
18.4-38	12	1887	528	W18	4000	200	PR-1	90

AGRICULTURAL TYRE



R-1G IRRIGATION TYRE

Special design for irrigation application.
Good self cleaning property and sufficient traction.

Size	PR	Overall Diameter (mm)	Section Width (mm)	Rim	Load capacity (kg)	Inflated Pressure (kpa)	Pattern	Pattern Depth(mm)
13.6-24	10	1210	345	W12	1545	210	R-1G	27
14.9-24	10	1265	378	W13	1990	230	R-1G	25
11.2-38	10	1540	305	W10	1630	180	R-1G	30



IMPLEMENT TYRE

Size	PR	Overall Diameter (mm)	Section Width (mm)	Rim	Pattern
7.50-16	8	808	203	5.50F	I-1
7.60L-15TT TL	6、 8	734	193	5.50F	I-1
9.5L-14TT TL	6、 8	741	241	7.00	I-1
9.5L-15TT TL	6、 8	780	240	8LB	I-1
11L-14TT TL	6、 8	750	280	8LB	I-1
11L-15TT TL	6、 8、 10、 12	810	280	8LB	I-1

AGRICULTURAL TYRE

11L-16TT TL	6、 8、 10、 12	835	280	8LB	I-1
12.5L-15TT TL	8、 10、 12、 14	823	318	10.00	I-1
12.5L-16TT TL	8、 12、 14	850	317	W10L	I-1
10-15TT TL	10、 12、 14、 16	855	276	8LB	I-1
205/75-15	8	700	200	7.00	I-1
207/80-15	8	730	230	7.00	I-1
16.5L-16.1	8、 10	1017	420	16.1x14LB	I-1
31x13.5-15	12	782	351	10.00	I-1



Size	PR	Overall Diameter (mm)	Section Width (mm)	Rim	Load capacity (kg)	Inflated Pressure (kpa)	Pattern	Pattern Depth(mm)
10.0/75-15.3	10	790	270	9	1550	300	I-3	20
400/60-15.5	14	874	404	13	2240	400	I-3	20
400/55-22.5	16	1012	404	13	2180	320	I-3	25
500/45-22.5	16	1022	503	16	2360	280	I-3	25
500/60-22.5	16	1173	503	16	4250	500	I-3	26
600/55-22.5	16	1132	611	20	4000	280	I-3	26
700/50-22.5	16	1270	700	24	4000	220	I-3	27
700/50-26.5	16	1333	700	24	4100	240	I-3	27
320/60-15.3	12	760	340	11	1950	390	I-3	15
15.0/55-17	14	850	391	13	2575	490	I-3	13
19.0/45-17	14	866	491	16	2800	390	I-3	16
500/50-17	14	945	500	16	3550	380	I-3	16

AGRICULTURAL TYRE



Size	PR	Overall Diameter (mm)	Section Width (mm)	Rim	Load capacity (kg)	Inflated Pressure (kpa)	Pattern	Pattern Depth(mm)
7.00-12	12	683	192	5.00F	1050	390	IMP100	14
10.0/80-12	8	710	264	9	1250	390	IMP100	12
10.0/75-15.3	10	760	264	9	1525	390	IMP100	13
11.5/80-15.3	12	865	290	9	2145	410	IMP100	13
12.5/80-15.3	14	875	307	9	2810	510	IMP100	11
6.00-16TT	6PR	713	161	4.00E	750	370	IMP100	8
10.0/80-12TL	10PR	710	264	9.00	1450	390	IMP100	9
10.0/80-12TL	12PR	710	264	9.00	1620	470	IMP100	9
10.0/80-12TL	14PR	710	264	9.00	1770	550	IMP100	9
10.0/75-15.3TL	10PR	760	264	9.00	1550	390	IMP100	9
10.0/75-15.3TL	12PR	760	264	9.00	1700	470	IMP100	9
10.0/75-15.3TL	14PR	760	264	9.00	1900	550	IMP100	9
10.0/75-15.3TL	16PR	760	264	9.00	2155	680	IMP100	9
11.5/80-15.3TL	10PR	845	290	9.00	1950	340	IMP100	10
11.5/80-15.3TL	12PR	845	290	9.00	2180	410	IMP100	10
11.5/80-15.3TL	14PR	845	290	9.00	2430	475	IMP100	10
11.5/80-15.3TL	16PR	845	290	9.00	2575	540	IMP100	10
12.5/80-15.3TL	14PR	889	307	9.00	2650	430	IMP100	10
12.5/80-15.3TT	14PR	889	307	9.00	2650	430	IMP100	10
12.5/80-15.3TL	16PR	889	307	9.00	3350	650	IMP100	10

AGRICULTURAL TYRE

10.5/65-16TL	10PR	755	274	W9	1550	380	IMP100	9
10.5/65-16TL	12PR	755	274	W9	1730	450	IMP100	9
10.5/65-16TL	14PR	755	274	W9	1900	530	IMP100	9
13.0/65-18TL	12PR	890	336	11.00	2360	360	IMP100	10
13.0/65-18TL	14PR	890	336	11.00	2575	430	IMP100	10
13.0/65-18TL	16PR	890	336	11.00	2800	490	IMP100	10
15.0/55-17TL	14PR	850	391	13.00	2575	370	IMP100	12



Size	PLY RATING	Overall Diameter (mm)	Section Width (mm)	STANDARD RIM	LOAD (kg)	PRESSURE (Kpa)	Pattern	TYEP
9.00-17	8	856	225	171INCH	1320	310	FD-318	TL
9.00-16	8	834	225	161INCH	1360	310	FD-318	TL

RADIAL AGRICULTURAL TYRE



R-1AGRICULTURAL RADIAL TYRES

Excellent durability, traction, passability and self-cleaning performance.
Deep tread pattern and special wear-resistant formula design extend the tire service life.
Round tire shoulder protects the soil and reduces soil compaction

Size	PR	Pattern Depth(mm)	Overall Diameter (mm)	Section Width (mm)	Load capacity (kg)	Inflated Pressure	Pattern
380/85R28	☆☆	46	1357	380	2060	160	R-1W
420/85R28	☆☆	48	1425	418	2800	240	R-1W
420/85R38	☆☆	4S	1747	418	3250	160	R-1W
460/85R38	☆☆	50	1747	455	3250	160	R-1W
480/65R28	☆☆	50	1326	470	2650	240	R-1W
520/85R38	☆☆	51	1849	516	3875	160	R-1W
540/65R30	☆☆	50	1450	520	2725	160	R-1W
600/60R28	☆☆	50	1479	590	3070	160	R-1W
600/60R30	☆☆	52	1595	595	4300	160	R-1W
650/65R38	☆☆	60	1790	640	4126	160	R-1W
650/65R42	☆☆	60	1890	640	4250	160	R-1W
710/60R42	☆☆	60	2030	715	7500	240	R-1W
900/60R38	☆☆	60	1998	895	8200	280	R-1W
280/85R24	☆☆	42	1086	282	1900	400	R-1W
460/85R38	☆☆	49	1747	455	3250	160	R-1W
320/85R24	☆☆	43	1154	319	1500	160	R-1W
320/85R28	☆☆	43	1255	319	1600	160	R-1W
460/85R34	☆☆	49	1646	455	3075	160	R-1W
380/85R24	☆☆	45	1256	380	1950	160	R-1W
380/85R28	☆☆	45	1357	380	2060	160	R-1W
460/70R24	☆☆	45	1254	455	2180	160	R-1W
600/65R28	☆☆	49	1491	591	3750	240	R-1W
420/85R30	☆☆	48	1476	418	2500	160	R-1W
420/85R24	☆☆	48	1324	418	2650	240	R-1W
420/85R34	☆☆	48	1578	418	3075	240	R-1W

HEAVY TRUCK TYRE

460/85R30	☆☆	49	1544	455	2900	160	R-1W
540/65R30	☆☆	48	1464	550	3350	240	R-1W
650/65R42	☆☆	50	1913	645	6000	320	R-1W
420/85R38	☆☆	48	1679	418	2650	160	R-1W
650/65R38	☆☆	50	1811	645	4875	240	R-1W
420/85R28	☆☆	4S	1425	418	2800	240	R-1W
520/85R38	☆☆	51	1849	516	3875	160	R-1W
800/65R32	☆☆	56	1853	798	7500	320	R-1W
710/70R38	☆☆	55	1959	716	6150	240	R-1W
540/65R28	☆☆	48	1413	550	3250	240	R-1W
600/60R30	☆☆	48	1481	601	4300	320	R-1W
710/60R42	☆☆	51	1918	716	5500	240	R-1W



FC-111 MIX PATTERN TRUCK TYRE

Unique pattern design enhances anti-cracking performance and heat dissipation Reinforced tire structure improves anti-blowout and anti-puncture performance
Suitable for bad pavement and ordinary road at medium or low speed.

Size	PR	Pattern Depth(mm)	Rim	Overall Diameter (mm)	Section Width (mm)	Speed Symbol	Load capacity (kg)	Inflated Pressure(kpa)	TT/TL	Pattern
4.50-12ULT	8	10	3 1/2J	545	127	J	S412 D400	400	TTF	FC-111
4.50-12 ULT	10	10	3 1/2J	545	127	J	S475 D462	500	TTF	FC-111
5.00-12 ULT	8	10	3.00D	568	143	J	S487 D462	400	TTF	FC-111
5.00-12ULT	10	10	3.00D	568	143	J	S560 D530	500	TTF	FC-111
6.00-13LT	10	9.5	4.00B	655	170	D	S740 D670	530	TTF	FC-111
6.00-14LT	10	10	4J,5J	680	170	D	S785 D690	530	TTF	FC-111
6.00-14LT	10	14.5	4J,5J	680	170	D	S785 D690	530	TTF	FC-111
6.00-15LT	10	10	4 1/2J	705	170	D	S820 D720	530	TTF	FC-111
6.00-15LT	10	16	4 1/2J	705	170	D	S820 D720	530	TTF	FC-111
6.50-16LT	12	19	5.00E	750	185	D	S1060 D925	630	TTF	FC-111
7.00-16LT	16	19	6.00G	775	200	D	S1350 D1215	770	TTF	FC-111
7.50-16LT	16	19	5.50F	805	215	D	S1550 D1370	770	TTF	FC-111

HEAVY TRUCK&OFF THE ROAD TYRE



FC-420



FC-421



FC-421/FC420 MINING TRUCK TYRE

For dump trucks on mining and logging service.
Deeper tread pattern for powerful traction and long mileage

Size	PR	Pattern Depth(mm)	Rim	Overall Diameter (mm)	Section Width (mm)	Speed Symbol	Load capacity (kg)	Inflated Pressure(kpa)	TT/TL	Pattern
6.50-16	14	16.5	5.50F	785	200	D	S1320/D1180	730	TTF	FC-421
7.00-16	14	16.5	5.50F	785	200	D	S1320/D1180	730	TTF	FC-421
7.50-16	14	17.5	6.00G	816	215	D	S1500/D1320	730	TTF	FC-421
8.25-16	14	18	6.50H	867	235	D	S1700/D1500	630	TTF	FC-421
10.00-20	16	28	7.5	1073	278	D	S3000/D2650	S810/D740	TTF	FC-421
11.00-20	16	28	8	1105	293	D	S3650/D3150	S910/D840	TTF	FC-421
12.00-20	18	22	8.5	1145	315	D	S3750/D3350	S810/D740	TTF	FC-1099
12.00-24	18	22	8.5	1247	315	D	S4250/D3750	S810/D740	TTF	FC-1099
14.00-20	20	25	10	1265	375		S5000/D4375	S770/D700	TTF	FC-433
	24	25	10	1265	375		S6800/D6200	S870/D810	TTF	FC-433
9.00-20	16	28	7	1018	259	D	S2900/D2500	S880/D810	TTF	FC-420
10.00-20	16	25	7.5	1073	278	D	S3000/D2650	S810/D740	TTF	FC-420
11.00-20	18	28	8	1105	293	D	S3650/D3150	S910/D840	TTF	FC-420
12.00-20	18	28	8.5	1145	315	D	S3750/D3350	S810/D740	TTF	FC-420

R-2W



Size	PR	Pattern Depth(mm)	Overall Diameter (mm)	Section Width (mm)	Load capacity (kg)	Inflated Pressure	Pattern
420/85R26	☆☆	60	1354	378	2000	230	R-2W
420/85R30	☆☆	60	1419	378	2400	280	R-2W
520/85R42	☆☆	70	1950	530	4200	160	R-2W

BIAS TRUCK TYRE



LUG



RIB



Size	PR	Overall Diameter (mm)	Section Width (mm)	Rim	Load capacity (kg)		Inflated Pressure(kpa)		Pattern Depth(mm)	Pattern
					SINGLE	DUAL	SINGLE	DUAL		
6.00-13LT	8	655	170	4.50B	650	580	420		10.5	RIB/LUG
6.00-14LT	8	680	170	4 1/2J	600	600	420		8	RIB/LUG
6.50-14LT	10	705	180	4 1/2J	775	690	420		8	RIB/LUG
6.50-16LT	12	750	185	5.50F	1060	925	630		10	RIB/LUG
7.00-16LT	12	775	200	5.50F	1215	1060	630		11	RIB/LUG
7.00-16LT	14	775	200	5.50F	1320	1180	730		11	RIB/LUG
6.50-15LT	10	730	180	4.50E	950	825	530		9	RIB/LUG
7.00-15LT	12	750	200	5.50F	1150	1030	630		10	RIB/LUG
7.50-16LT	14	805	215	6.00G	1500	1320	730		12	RIB/LUG
8.25-16LT	14	855	235	6.50H	1700	1500	630		13	RIB/LUG
8.25-16LT	16	855	235	6.50H	1800	1600	730		13	RIB/LUG
8.25-20	14	974	236	6.5	2240	1950	810	740	14	RIB/LUG
8.25-20	16	974	236	6.5	2430	2180	910	840	14	RIB/LUG
9.00-20	14	1018	259	7	2575	2300	770	700	14.5	RIB/LUG
9.00-20	16	1018	259	7	2900	2500	880	810	14.5	RIB/LUG
10.00-20	16	1055	278	7.5	3000	2650	810	740	15	RIB/LUG
10.00-20	18	1055	278	7.5	3350	2900	910	840	15	RIB/LUG
11.00-20	16	1085	293	8	3350	2900	810	740	15	RIB/LUG
12.00-20	18	1125	315	8.5	3750	3350	810	740	15.5	RIB/LUG

FORESTRY-KING TYRE



FT-KING



FORESTRY TYRE

- Highly durable, sturdy and robust construction
 - low profile
 - rim flange protector
- protected sidewall against snags and branches
 - steel belt protection on sidewall and tread
 - designed to stand the most tough working conditions
- the ultimate forestry tyre

Size	PLY RATING	TT/TL	PATTERN CODE	STANDARD RIM	DEEP (mm)	SECTION WIDTH(mm)	OVERALL DIAMETER (mm)	PRESSURE (Kpa)	SINGLE FETAL LOAD	LOAD INDEX SPEED KM/H
320/85-24 12.4-24	14PR	TT/TL	FT-KING	W11	41	315	1160	350	1900	130A8/127B
380/85-24 14.9-24	14PR	TT/TL	FT-KING	W13	43	378	1265	370	2360	138A8/134B
380/85-26 14.9-26	14PR	TT/TL	FT-KING	W13	43	378	1315	310	2650	142A8/137B
460/85-26 18.4-26	16PR	TT/TL	FT-KING	DW16	52	467	1450	270	3350	150A8/147B
600/80-26 23.1-26	16PR	TT/TL	FT-KING	DW20	53	587	1630	240	4450	160 A6
710/65-26 28L-26	20PR	TT/TL	FT-KING	DW25	55	715	1645	240	5150	165 A6
----- 28.1-26	22PR	TT/TL	FT-KING	DW25	55	716	1650	240	5300	166 A8
600/65-28 -----	16PR	TT/TL	FT-KING	DW20	52	587	1680	270	4375	159 A8
420/85-30 16.9-30	16PR	TT/TL	FT-KING	W15L	48	430	1510	320	3250	149A8/146B
460/85-30 18.4-30	16PR	TT/TL	FT-KING	DW16	52	467	1575	280	3450	151A8/148B
600/80-30 23.1-30	18PR	TT/TL	FT-KING	DW20	54	587	1730	270	4625	161 A6
650/75-32 24.5-32	24PR	TT/TL	FT-KING	DW21	55	622	1830	310	6300	172 A6
800/65-32 30.5L-32	32PR	TT/TL	FT-KING	DW27	55	775	1845	340	8000	180 A6
900/65-32 35.5L-32	32PR	TT/TL	FT-KING	DW31	58	902	2011	280	9000	184 A6
460/85-34 18.4-34	16PR	TT/TL	FT-KING	W16L	52	467	1680	300	4000	156A8/153B
520/85-38 20.8-38	18PR	TT/TL	FT-KING	DW18L	55	528	1835	310	5000	164A8/159B
520/85-42 20.8-42	18PR	TT/TL	FT-KING	DW18L	58	528	1935	310	5600	168A8/165B

ATV/UTV TYRE



KNIGHT



VOCTORY



ATLAS



MARS-A



ATV/UTV TYRES

High horsepower ATV/UTV tire specifically designed to dominate in rough, hard-pack, gravel and sandy terrains.
Premiere desert tire for high horsepower vehicles 6 ply rated radial ATV/UTV tire Optimal footprint for even pressure distribution Staggered houlder lugs
Unmatched traction and side bite Dominates rough, hard-pack, gravel and sandy terrain Surgical steering response Predictable lateral stability

Size	PR	Rim Width (Inch)	O.D. (Inch)	S.W. (Inch)	Max Load (Lbs)	PSI	PATTERN	Size	PR	Rim Width (Inch)	O.D. (Inch)	S.W. (Inch)	Max Load (Lbs)	PSI	PATTERN
25x11-10	6	9	24.8	10.8	455	7	KNIGHT	23x8-10	6	6.5	23.4	8.3	300	7	MARS-A
23x8-11	6	6.5	23.5	7.5	290	7	KNIGHT	23x10-10	6	8	23.4	10.2	375	7	MARS-A
24x9-11	6	7.5	24.3	9.1	365	7	KNIGHT	25x12-10	6	9.5	25	12	495	7	MARS-A
25x8-12	6	6.5	25	8	340	7	KNIGHT	22x7-11	6	9	22	6.9	395	7	MARS-A
25x10-12	6	8	25	9.6	420	7	KNIGHT	22x11-9	6	9	22	11	395	7	MARS-A
25x11-12	6	9	24.8	10.7	455	7	KNIGHT	23x8-11	6	6.5	23.4	7.6	290	7	MARS-A
26x9-12	6	7	26	9	410	7	KNIGHT	24x8-11	6	6.5	24	8.1	320	7	MARS-A
26x11-12	6	9	25.8	10	480	7	KNIGHT	25x8-11	6	6.5	25.1	8.1	355	7	MARS-A
26x12-12	6	8	26	10	520	7	KNIGHT	25x10-11	6	8	252	10	430	7	MARS-A
27x9-12	6	7	27	9	440	7	KNIGHT	25x8-12	6	6.5	252	8.3	340	7	MARS-A
27x11-12	6	7	26.9	10.7	495	7	KNIGHT	25x10-12	6	8	24.4	9.9	420	7	MARS-A
27x12-12	6	9.5	27	10	550	7	KNIGHT	25x12-12	6	9.5	25	12	480	7	MARS-A
26x9-14	6	7	26	9	395	7	KNIGHT	26x9-12	6	7	26	9	410	7	MARS-A
26x11-14	6	8	26	9.7	465	7	KNIGHT	26x10-12	6	8	25.9	9	440	7	MARS-A
25x8-12	6	6.5	25.2	8.3	340	7	ATLAS	26x11-12	6	9	25.8	10	480	7	MARS-A
25x10-12	6	8	24.4	9.9	420	7	ATLAS	26x12-12	6	9.5	25.9	11.4	520	7	MARS-A
26x9-12	6	7	26	9	410	7	ATLAS	27x10-12	6	8	26.9	9	490	7	MARS-A
26x11-12	6	9	25.8	10	480	7	ATLAS	27x12-12	6	9.5	26.9	11.4	550	7	MARS-A
26x8-14	6	6.5	26	8	355	7	ATLAS	28x10-12	6	8	27.8	9	450	7	MARS-A
26x10-14	6	8	26	10	430	7	ATLAS	25x8-12	6	6.5	24.8	8	340	7	VICTORY
26x9-14	6	7	26	9	395	7	ATLAS	25x10-12	6	8	25	9.9	420	7	VICTORY
26x11-14	6	9	26	11	465	7	ATLAS	26x9-12	6	7	26	9	410	7	VICTORY
27x9-14	6	7	27	9	410	7	ATLAS	26x11-12	6	9	25.8	11	480	7	VICTORY
27x11-14	6	9	27	11	480	7	ATLAS	26x9-14	6	7	26	9	395	7	VICTORY
29x9-14	6	7	29	9	495	7	ATLAS	26x11-14	6	9	26	11	465	7	VICTORY
29x11-14	6	9	29	11	520	7	ATLAS	27x9-14	6	7	27	9	410	7	VICTORY
22x11-8	6	9	22.3	10.9	395	7	MARS-A	27x11-14	6	9	27	10.8	480	7	VICTORY
22x10-9	6	8	22	10	365	7	MARS-A	28x10-14	6	8	28	10	480	7	VICTORY
25x12-9	6	9.5	25.2	11.6	495	7	MARS-A	29x9-14	6	7	29	9	495	7	VICTORY
22x11-10	6	9	22.2	10.7	385	7	MARS-A	29x11-14	6	9	29	11	520	7	VICTORY
22x8-10	6	7	21.9	8	275	7	MARS-A	30x10-14	6	8	30	10	970	7	VICTORY