


Payanywhere Smart Flex

Specifications | PAX E600 Mini



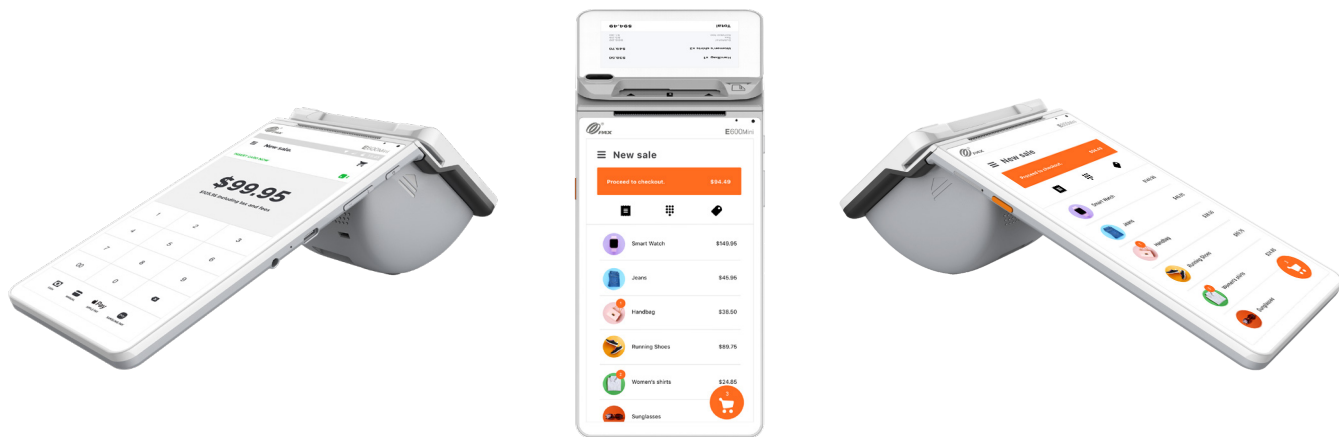

Software	The Payanywhere Application
Operating System	Powered by PayDroid 10 + Q10A PayDroid
Processor	64 bit 8-Core Cortex A55
Memory	16GB eMMC Flash + 2GB DDR RAM Extended microSD Card Slot Up to 128GB
Card Readers	Hybrid Chip & PIN + Magnetic Stripe + NFC Contactless
Display	7" IPS 1024 x 600 Pixels WSVGA Touchscreen Optional: 7" IPS 1280 x 720 Pixels HD Touchscreen Customer Display: 3.5" TFT 480 x 320 Pixels Touchscreen
Comms Configurations	4G + Wi-Fi® 2.4GHz/5GHz + Bluetooth®5.1
Battery	6100mAh 3.85V
Printer	40 lines/sec Paper Roll Outer Diameter: 50mm
SIM / SAM	2 NANO SIM
Keys / Buttons	4 Keys: Power Volume+ Volume- Quick Scan Button
Audio	1 Speaker 1 Microphone
Ports	1 Type-C 1 Audio Jack
Adapter	Input: 100-240V AC, 50Hz/60Hz Output: 9V DC, 2A
Physical	101 x 230 x 79mm, 0.54kg
Environmental	0°C ~ 50°C (32°F ~ 122°F) Operating Temperature, Non-Charging -20°C ~ 70°C (-4°F ~ 158°F) Storage Temperature 5% ~ 96% Relative Humidity, Non-Condensing
Certifications	PCI PTS 6.x SRED EMV L1 & L2 EMV contactless L1 Visa payWave Mastercard contactless UPI qUICS American Expresspay Discover D-PAS JCB J/Speedy Interac Flash MasterCard TQM FCC IC CE RoHs Anatel