
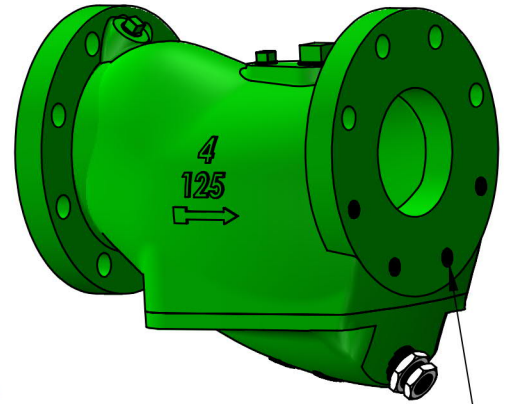


MODEL LPD-MAG LOW PRESSURE DROP STRAINER WITH MAGNETIC INSERT

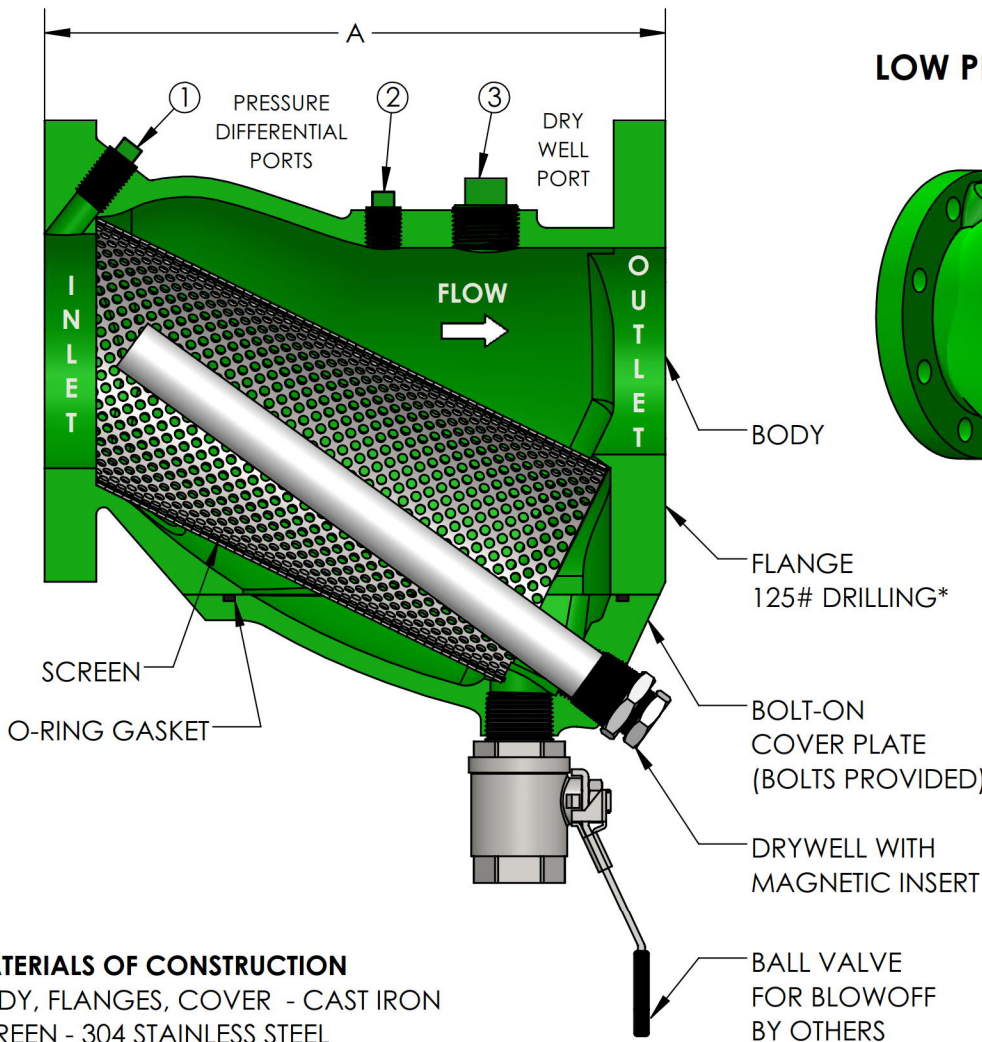

*TAPPED BOLT HOLES
HALF OF THE BOLT HOLES ON
THE OUTLET END ARE TAPPED.
SEE TAP SIZE BELOW FOR SIZING.

STANDARD SCREENS

SERVICE	SIZE	PERF
LIQUID	2" - 3"	.045"
	4" - 8"	.125"

MATERIALS OF CONSTRUCTION

BODY, FLANGES, COVER - CAST IRON
SCREEN - 304 STAINLESS STEEL
O-RING GASKET - VITON
DRYWELL - 304 STAINLESS STEEL
MAGNETS - NEODYMIUM

OPERATING TEMPERATURE/PRESSURE

WATER, OIL, GAS.....175 PSI @ 150°F
MAXIMUM OPERATING TEMPERATURE: 212°F

QTY	PART NUMBER	PIPE SIZE		A	B	Cv# (GPM)	SCREEN AREA (in ²)	PORT SIZE (NPT)		BLOWOFF SIZE (NPT)	TAP SIZE (UNC)	TAP DEPTH	WEIGHT (LBS)
		INCH	MM					1 & 2	3				
	LPDMAG0200	2"	50	7-7/8"	4-5/8"	120	52.0	1/4"	1/2"	3/4"	5/8"-11	1/2"	20
	LPDMAG0250	2-1/2"	65	10"	5-1/4"	160	84.6	1/4"	1/2"	3/4"	5/8"-11	1/2"	30
	LPDMAG0300	3"	80	10-1/8"	6-1/4"	236	99.0	1/4"	1/2"	1"	5/8"-11	7/8"	50
	LPDMAG0400	4"	100	12-1/8"	7-3/8"	460	147.3	3/8"	1"	1"	5/8"-11	7/8"	75
	LPDMAG0500	5"	125	15-5/8"	8-3/8"	600	226.5	3/8"	1"	1-1/2"	3/4"-10	7/8"	115
	LPDMAG0600	6"	150	18-1/2"	10-5/8"	952	317.6	3/8"	1"	1-1/2"	3/4"-10	7/8"	154
	LPDMAG0800	8"	200	22-1/2"	13"	1580	515.0	3/8"	1"	1-1/2"	3/4"-10	1"	273

#Cv IS THE FLOW RATE IN GALLONS OF 60°F WATER THAT WILL PASS THROUGH THE STRAINER IN 1 MINUTE AT A 1 PSI PRESSURE DROP.


NSF 372 - LEAD FREE

The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight. Material complies with state codes and standards, where applicable, requiring reduced lead content.

CUSTOMER: _____

PROJECT: _____

ENGINEER: _____

REV.	DATE
 Clovis, Ca, USA PH: +1 559-2882382 FAX: +1 559-272-6054 WEB: epiphene.com	
MODEL LPD-MAG LPD STRAINER WITH MAGNETIC INSERT	
DRAWN BY: DKISH	DATE: 1/24/2019
APPROVED: JC	DATE: 1/29/2019
SCALE: NTS	DRAWING NUMBER: LPDMAG-2

Y Strainer Pressure Drop

