


FOREST RBS® MOTORIZED



FOREST RBS® MOTORIZED



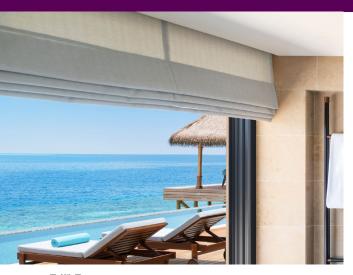

Scan for more information on the FOREST RBS Motorized System




RBS MOTORIZED ROMAN BLIND SYSTEM

- The most durable and functional roman blind system on the market. RBS includes integrated Velcro tape so the fabric can be easily attached and removed.
- Aluminum, white, powder coated extrusion. Best suited for light weight fabrics in contract or residential applications.
- Maximum weight is 10 lbs with a maximum width of 84".
- The Forest tubular motor includes a 10 year warranty. The lithium iOn battery includes a 1 year warranty.

ASSEMBLED SYSTEM

Includes headrail, cord roll supports, brackets, counterweight (if requested), Velcro profile, motor and remote or wall switch. When ordering, please specify motor side, wall or ceiling mount, and number of cord roll supports needed.

RBS MOT		COMPONENT
•	8"	62903-25 RBS Tubular Motor, 24 V Double Shaft Lifts up to 10 lbs.
•		52928-25 7' 6" power cord 52934-25 16' power cord Includes 24 v Power Supply
•		52931-25D white 59D black Diamond Sense Remote RF, 15 channel w/ holder, Range 98'
•		52933-25 white 59 black Diamond Sense Wall Switch 15 channel

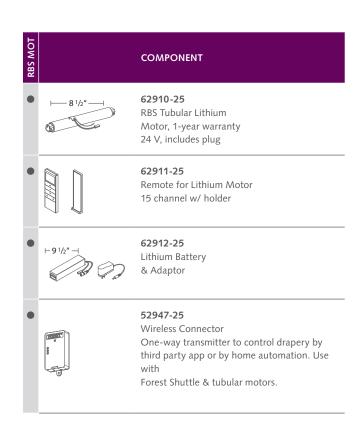


FOREST RBS® MOTORIZED

RBS MOT		COMPONENT	RBS MOT	COMPONENT
•	1 3/8"	41019-25 RBS Headrail white 19' x 10 rails/bundle bundle = 190'	•	43004-25 Klick Ceiling Bracket
•	E	49010-25 RBS Cord Roll Support w/ quick lock, 12' drop		49090-25 Valance Bracket attaches to Velcro profile
•		62913-25 RBS End Caps left & right	•	49091-25 Valance Corners
•		41119-90 19' Rod aluminum 3/16" x 3/16"	•	49008-00 Shade Leveler
•		49005-25 Counterweight, 19' aluminum 1" x 1/8"	•	39007-25 Velcro Tape 27 yds. per roll
•		31116-25 Velcro Profile w/ Hook Tape, 13.1'	•	49006-25 Fiberglass Spines, 19' 3/16" diameter
•		43202-25 Swivel Wall Bracket	•	49014-25
•		43003-25 Swivel Ceiling Bracket		Plastic Snap Ring
•		43033-25 Klick Wall Bracket	•	49013-25 Plastic Ring Cord Guide
•		43034-25 Hidden Klick Multi Bracket	•	49400-25 Shroud 73 yds. per roll

RBS® TUBULAR MOTOR SPECIFICATIONS

MOTOR SPECIFICATIONS



- 62903-25 RBS Tubular Motor
- Double Shaft Lifts up to 10 lbs.
- 24Vdc, 16Watt
- Torque: 0.8Nm max 1.0Nm
- 34 rpm

- max. running time 7 min
- max. 5 cord rolls
- 10 Year Warranty



- 62910-25 RBS Tubular Lithium Motor
- Lifts up to 15 lbs.
- 24Vdc, 10Watt
- Torque: 0.8Nm
- 34 rpm

- 350 revolutions per 8 hr charge
- Rechargeable
- 1 Year Warranty

