




Southwire™

LED STRING LIGHT - X UPLIGHT

- Each LED head delivers 2200 lumens:
 - 2000 Lumens Downward
 - 200 Lumens Upward
- 4-Way Mounting Loop
- Available in 50' & 100' Lengths
- NEMA 5-15 and L5-20 Options Available
- Daisy Chain Receptacle Included
- Heavy Duty 16/3 Cord
- Diffused Anti Glare Lens

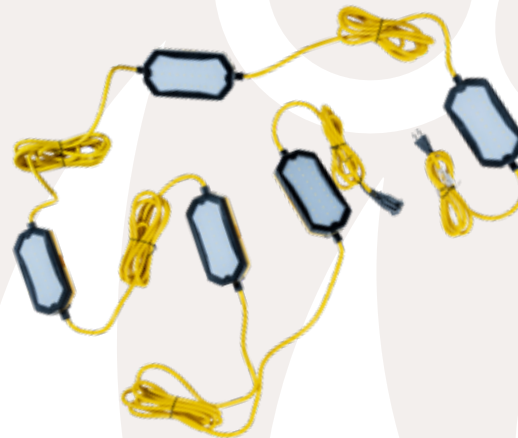

**2200 LUMENS
PER HEAD**

**120VAC
50/60HZ**

**100FT = 160W
50FT = 80W**

**DIFFUSED ANTI
GLARE LENS**

**ANTI-TWISTING
HANGING PORTS:
• 4 WAY "X" HANGING LOOP
• VERTICAL HANGING LOOPS**



MODEL #	UPC	DESCRIPTION	HEIGHT	WIDTH	LENGTH	WEIGHT
71X5SW	032886297113	100ft LED String Light - X Uplight	17"	9"	12"	16 lbs.
71X4SW	032886297120	50ft LED String Light - X Uplight	12"	9"	9"	8 lbs.
71X5SW520	032886297137	100ft LED String Light - X Uplight L5-20 Twist Lock	17"	9"	12"	16 lbs.
71X4SW520	032886297144	50ft LED String Light - X Uplight L5-20 Twist Lock	12"	9"	9"	8 lbs.

MODEL #	CARTON QTY	CORD GAUGE	WEATHER RATING	POWER OUTLET	MAX CHAIN LENGTH	LENS MATERIAL	CERTIFICATION	WORKING TEMP	CRI	REPLACEMENT PARTS
71X5SW	2	16/3 SJTW	Wet Location	NEMA 5-15R	500 ft	Polycarbonate	cETLus, FCC, ICES	-25°F to 130°F	80	Light Head: X5111
71X4SW	4	16/3 SJTW	Wet Location	NEMA 5-15R	500 ft	Polycarbonate	cETLus, FCC, ICES	-25°F to 130°F	80	Light Head: X5111
71X5SW520	2	16/3 SJTW	Damp Location	NEMA L5-20R	500 ft	Polycarbonate	cETLus, FCC, ICES	-25°F to 130°F	80	Light Head: X5111
71X4SW520	4	16/3 SJTW	Damp Location	NEMA L5-20R	500 ft	Polycarbonate	cETLus, FCC, ICES	-25°F to 130°F	80	Light Head: X5111

**BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™**

1-855-798-6657 | SOUTHWIRE.COM

©2022 Southwire Company, LLC. All rights reserved.
*Registered Trademark & ™Trademark of Southwire Company, LLC.