


PIPE JACKS, STANDS, ROLLERS, HANDLING & LIFTING EQUIPMENT




**Pipe &
Industrial
Tools™**

AN **S F E** GROUP BRAND

BROCHURE

www.bbipetools.com



The **Specialized Fabrication Equipment Group** (in short: **S.F.E. Group**) was founded in 2019 after the merger of three world leading OEM's in the field of pipe fabrication tooling and machinery: B&B Pipe and Industrial Tools LLC (USA), Mathey Dearman Inc. (USA) and TAG Pipe Equipment Specialists (UK). In a time span of 4 years, another 3 renowned and market leading companies were acquired and added to the S.F.E. Group portfolio: Axxair (France, 2022), Magnatech (USA, 2023) and Climax (USA, 2023).

The vision and philosophy of the **S.F.E. Group** is to offer globally a comprehensive innovative and cost-effective range of specialized fabrication, welding and machining equipment and derived rental solutions, for a wide range of applications within all critical industries, while optimizing performance, efficiency and safety.


Leveraging over 200 years of combined experience in engineering, manufacturing, and field applications, the **S.F.E. Group** is committed to driving innovation. Through continuous product development and strategic acquisitions, the **S.F.E. Group** is actively growing its portfolio and expanding its global presence to meet the demands of industries around the world. Currently, the **S.F.E. Group** consists of 11 complimentary brands, each supporting the others in delivering cutting-edge solutions.

With offices and warehousing on 5 continents, 300+ employees and more than 350 partnerships and distributors worldwide, **S.F.E. Group** prides itself on consistently offering the highest standards of both product quality and service locally to all its customers.

S.F.E. Group looks forward to welcoming you into its global network as a partner, distributor or end user customer and remains at your disposal at any time.

Contact Americas: sales@sfe-brands.com
 Contact International: sales-int@sfe-brands.com

S.F.E. GROUP GLOBAL PRESENCE

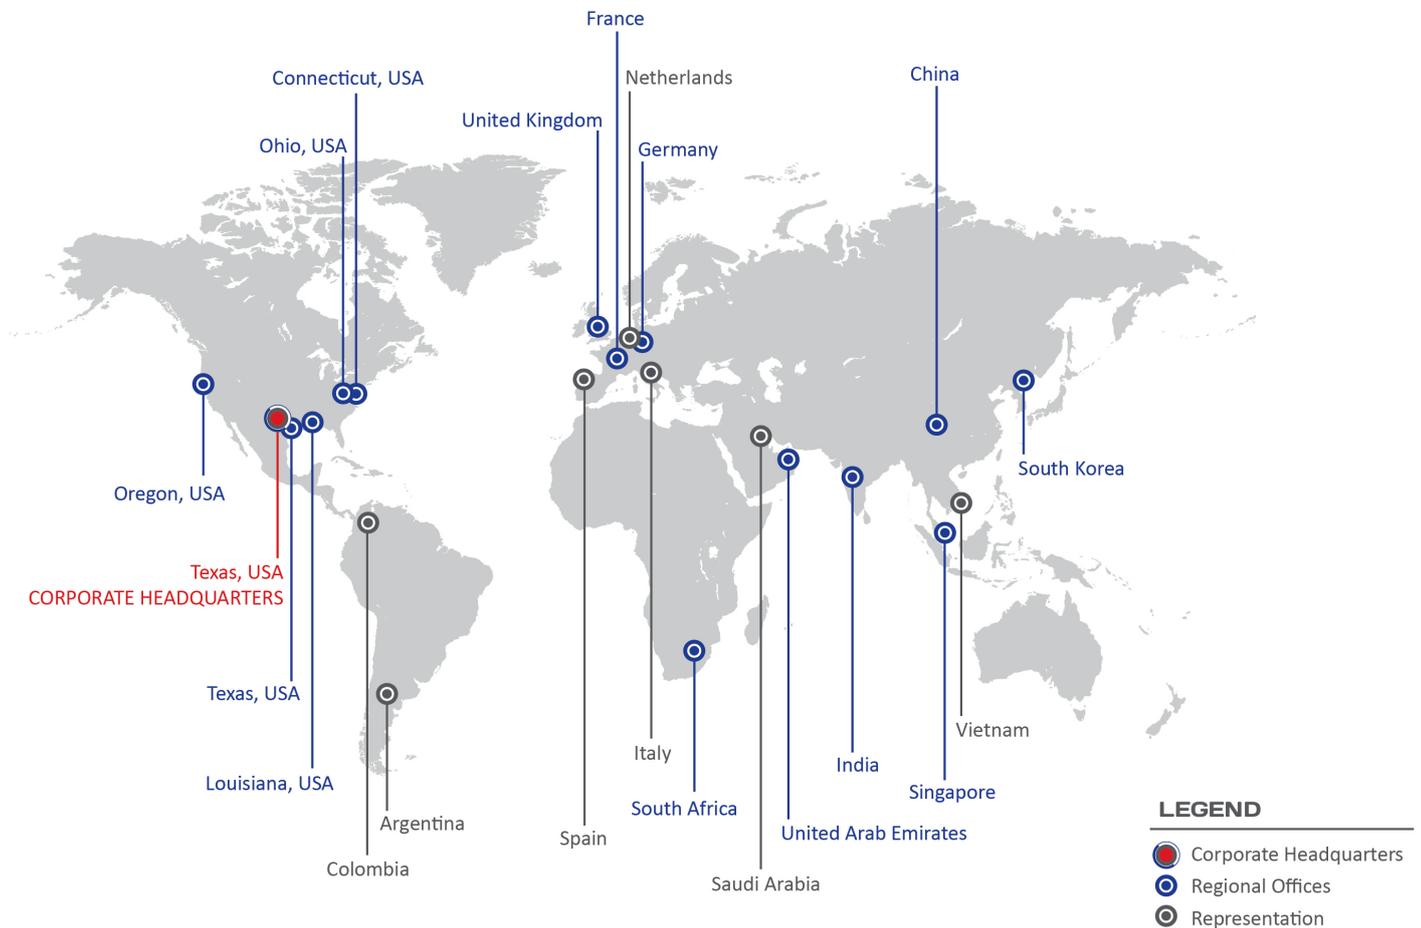



The company **B&B Pipe and Industrial Tools (B&B)** was originally founded in Houston, Texas, USA in the 1990's, offering initially mainly the standard pipe rollers and applications, sold into petrochemical construction projects along the Texas Gulf Coast. Over the years **B&B** became an important player in the U.S. market.


Backed by nearly 30 years of development, today S.F.E. Group's **B&B** brand is dedicated to pipe handling equipment, applications and solutions. With the **B&B** brand, S.F.E. Group not only wishes to highlight the focus on this particular product line, but also supply the growing demand and diverse applications in the industries it already serves and intertwine with other product applications within S.F.E. Group.

As an OEM, S.F.E. Group prides itself being renowned for its innovations, ground-breaking developments and creative designs within the **B&B** product range. With its engineering capabilities, customer-oriented focus and flexibility, the **B&B** brand provides the possibility to design out-of-the-box pipe handling solutions to fulfil customers' projects' specific needs in particular and to cater for an ever-evolving industry in general.

The **B&B** brand portfolio consists of a comprehensive range of pipe jacks and stands, mega rollers and stands, mega lifts and material handling carts.

B&B products are always nearby available within the S.F.E. Group global network and can be consulted on the dedicated website: www.BBPIPETOOLS.com


INDUSTRIES SERVED

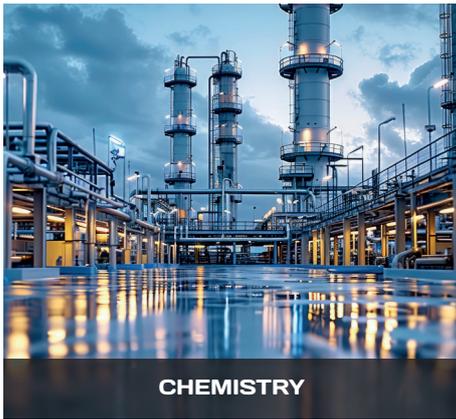

CHEMISTRY




MANUFACTURING & FABRICATION

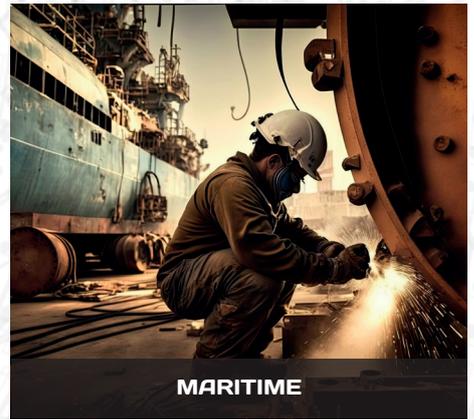


MARITIME



OIL & GAS

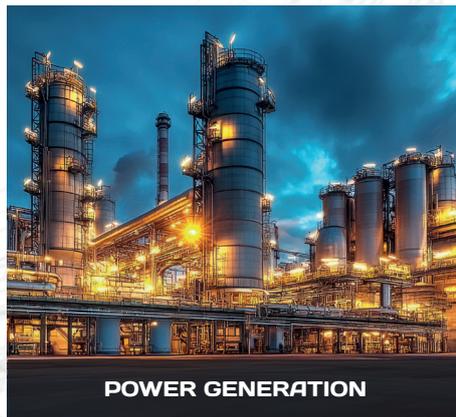

POWER GENERATION

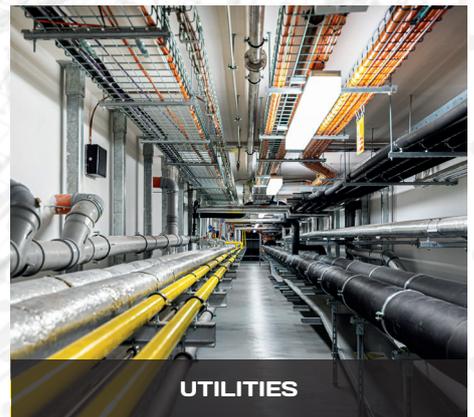

UTILITIES

OUR BRANDS



Our group policy is one of continuous improvements and acquisitions. Products and data tables are subject to change and may vary from those illustrated. Copyright © 2025 Specialized Fabrication Equipment Group, All rights reserved.

2

INTRODUCTION TO S.F.E. GROUP

3

INTRODUCTION TO B&B

5

PIPE JACKS AND STANDS

6

FIXED AND FOLDING PIPE JACKS
(TRI PIPE STAND)

8

FIXED AND FOLDING LEG PIPE JACKS
- LOW PROFILE

9

SIX-FOOT FOLDING PIPE JACK

10

ADJUSTABLE 4 LEG PIPE ROLLER STAND

12

DUO STAND™ HEIGHT ADJUSTABLE 4 LEG PIPE
ROLLER

15

QUICK CHANGE ROLLERS

15


TRI-STAND CHAIN VICE & PIPE CHAIN VICE
CLAMP

16

3 LEG GIANT JACK

17

5 LEG GIANT JACK

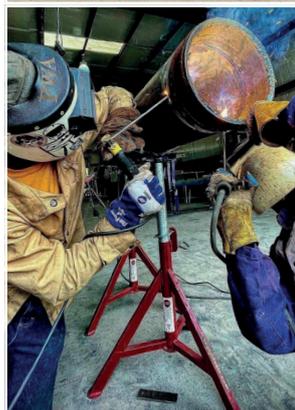

21

MEGA ROLLERS AND STANDS

22

MEGA ROLLER STAND
6,000 Lbs / 3 US TON

23

MEGA ROLLER STAND
10,000 Lbs / 5 US TON

24

MEGA ROLLER STAND
15,000 Lbs / 7.5 US TON

25

MEGA JACK - 3 LEG

26

MEGA JACK - 4 LEG

27

MEGA HORSE

29

HANDLING & LIFTING EQUIPMENT

30

PIPE CART

31

CONDUIT CARTS

31

CRATE CART

32

BUNDLE CART

32

HANGER CARTS

33

BIGGY PIPE BUGGY

33

BABY PIPE BUGGY


34

CYLINDER / BOTTLE CARTS

35

MEGA LIFT

PIPE JACKS & STANDS



**Pipe &
Industrial
Tools™**

AN **SCS** GROUP BRAND



MOST POPULAR

B&B Pipe & Industrial Tools - The pipe jacks and pipe stands are backed with over 30 years of manufacturing experience. All pipe jacks and pipe stands are rated with at least a 2:1 safety ratio that is third party tested. We have made B&B pipe jacks the strongest, most durable products on the market. B&B also offers an extensive range of head options for any pipe fabrication application.



4100 - Fixed leg pipe jack (tri pipe stand) (includes V-head)

SPECIFICATIONS

- 2,500 lbs / 1,135 kg load capacity
- Third party tested with at least a 2:1 safety ratio.
- Oversized 10" V-head for increased safety.
- Oversized square tube legs and braces for increased durability.
- 1½" (1.5") ACME rod is largest in the industry.
- Quick lock washer height adjustment for easy use.
- More head options than any other manufacturer.
- Increased width stance for better stability.
- Square tube bracing offers additional strength and rigidity.
- Safety washer can be locked on to base for increased operator safety.



MAX. 49" / 1,245 mm

MIN. 28" / 711.2 mm



3900 - Folding leg pipe jack (tri pipe stand) (includes V-head)

PART NO.	4100		
DESCRIPTION:	Fixed leg pipe jack (tri pipe stand) (includes V-head)		
LOAD CAPACITY		SHIPPING WEIGHT	
2,500 lbs	1,135 kg	19.85 lbs	9.00 kg

PART NO.	3900		
DESCRIPTION:	Folding leg pipe jack (tri pipe stand) (includes V-head)		
LOAD CAPACITY		SHIPPING WEIGHT	
2,500 lbs	1,135 kg	22.30 lbs	10.10 kg



* SUITABLE FOR STAINLESS STEEL

PART NO.	90002		
DESCRIPTION: Steel wheel roller head			
LOAD CAPACITY		SHIPPING WEIGHT	
2,000 lbs	910 kg	10.80 lbs	4.90 kg

PART NO.	* 90005		
DESCRIPTION: Stainless steel wheel roller head			
LOAD CAPACITY		SHIPPING WEIGHT	
2,000 lbs	910 kg	10.80 lbs	4.90 kg

PART NO.	* 90003		
DESCRIPTION: Phenolic wheel roller head			
LOAD CAPACITY		SHIPPING WEIGHT	
1,000 lbs	450 kg	7.30 lbs	3.30 kg

PART NO.	90060 / * 90061		
DESCRIPTION: Steel wheel heads (slip on style) (pair) / Stainless steel wheel heads (slip on style) (pair)			
LOAD CAPACITY		SHIPPING WEIGHT	
1,000 lbs	450 kg	7.30 lbs	3.30 kg

PART NO.	* 90032		
DESCRIPTION: Phenolic wheel heads (slip on style) (pair)			
LOAD CAPACITY		SHIPPING WEIGHT	
1,000 lbs	450 kg	4.40 lbs	2.00 kg

PART NO.	* 90000		
DESCRIPTION: Stainless steel ball transfer heads (slip on style) (pair)			
LOAD CAPACITY		SHIPPING WEIGHT	
1,000 lbs	450 kg	5.50 lbs	2.50 kg

PART NO.	* 90004		
DESCRIPTION: Stainless steel head (slip on style) (pair)			
LOAD CAPACITY		SHIPPING WEIGHT	
3,500 lbs	1,585 kg	2.20 lbs	1.00 kg

PART NO.	90033		
DESCRIPTION: Pipe chain vice head (0.5 - 6")			
LOAD CAPACITY		SHIPPING WEIGHT	
550 lbs	250 kg	14.30 lbs	6.50 kg

PART NO.	90019		
DESCRIPTION: Conveyor roller head			
LOAD CAPACITY		SHIPPING WEIGHT	
550 lbs	250 kg	9.40 lbs	4.25 kg

PART NO.	90021		
DESCRIPTION: Conveyor V-head			
LOAD CAPACITY		SHIPPING WEIGHT	
550 lbs	250 kg	9.40 lbs	4.25 kg

PART NO.	90001		
DESCRIPTION: V-head			
LOAD CAPACITY		SHIPPING WEIGHT	
2,500 lbs	1,135 kg	7.50 lbs	3.40 kg



B&B Pipe & Industrial Tools - Besides the popular regular fixed (4100) and folding (3900) pipe jacks, B&B also offers alternative pipe jacks with lower working heights.

These variations (available in fixed and folding versions) offer the same quality, versatility and reliability for the operator.

The low profile jacks are popular in general pipe fabrication, installation and maintenance work as well as in mechanical workshops.

4000 - LOW PROFILE FOLDING LEG PIPE JACK (INC. V-HEAD)



4240 - SUPER STUBBY FIXED LEG PIPE JACK (INC. V-HEAD)



4200 STUBBY FIXED LEG PIPE JACK (INC. V-HEAD)



SPECIFICATIONS

- 2,500 lbs / 1,135 kg load capacity
- Three sizes:
22 - 39" / 558.8 - 990.6 mm
low profile folding leg
- 20 - 37" / 508 - 939.8 mm
low profile fixed leg (stubby)
- 16 - 26" / 406.4 - 660.4 mm
super low profile fixed leg (super stubby)
- Third party tested with at least a 2:1 safety ratio
- Oversized 10" V-head for increased safety
- Oversized square tube legs and braces for increased durability
- 1½" (1.5") ACME rod is largest in the industry
- Quick lock washer height adjustment for easy use
- More head options than any other manufacturer
- Increased width stance for better stability
- Square tube bracing offers additional strength and rigidity
- Safety washer can be locked on to base for increased operator safety

PART NO.	DESCRIPTION	LOAD CAPACITY		DIMENSIONS (L x W x H)		ADJUSTMENT HEIGHT		SHIPPING WEIGHT	
4000	Low Profile Folding Leg Pipe Jack (inc V-head)	2,500 lbs	1,135 kg	22 x 22 x 22"	558.8 x 558.8 x 558.8 mm	22 - 39"	558.8 - 990.6 mm	20.00 lbs	9.00 kg
4200	Stubby Fixed Leg Pipe Jack (inc V-head)	2,500 lbs	1,135 kg	15 x 14 x 20"	381 x 355.6 x 508 mm	20 - 37"	508 - 939.8 mm	18.00 lbs	8.00 kg
4240	Super Stubby Fixed Leg Pipe Jack (inc V-head)	2,500 lbs	1,135 kg	15 x 13 x 16"	381 x 330.2 x 406.4 mm	16 - 26"	406.4 - 660.4 mm	14.00 lbs	6.50 kg

NOTE: The 3900 and 4100 (our most popular stands) are stocked in higher quantities at more global locations.

For head options on the Low Profile Pipe Jacks, please see the Fixed and Folding Pipe Jacks head options



EASY AND SAFE FOR HIGH PIPE WORKING APPLICATIONS



MAX.
HEIGHT:
72" / 1,829 mm

FOOT PRINT:
38" / 965.2 mm

The B&B Six-foot folding pipe jack is ideal for pipe holding and leveling in high places. With a top height of 72" / 1,829 mm tall and a bottom adjustment of 39" / 991 mm, the Six-foot jack can be used for many applications.

The Six-foot jack is foldable and can be carried with ease, fitting into tight spaces when transporting. The height adjustment is performed with a locking tube and 1½" (1.5") ACME adjustment.



MIN.
HEIGHT:
39" / 991 mm

SPECIFICATIONS

- Height adjustment: 39 - 72" / 991 - 1,829 mm
- Load capacity: 1,000 lbs / 450 kg
- Extra wide 38" footprint increases stability.
- Lock washer can be fastened to base for safety.
- Quick lock washer height adjustment for easy use
- 1½" (1.5") ACME-thread adjustment.
- Folding design allows easy access into tight work spaces.
- Bottom T-handle locks folding base into fixed position.
- Pipe diameter: 1 - 12"

PART NO.	90060 / * 90061		
DESCRIPTION:	Steel wheel heads (slip on style) (pair) / Stainless steel wheel heads (slip on style) (pair)		
LOAD CAPACITY	SHIPPING WEIGHT		
1,000 lbs	450 kg	7.30 lbs	3.30 kg



PART NO.	* 90032		
DESCRIPTION:	Phenolic wheel heads (slip on style) (pair)		
LOAD CAPACITY	SHIPPING WEIGHT		
1,000 lbs	450 kg	4.40 lbs	2.00 kg



PART NO.	* 90000		
DESCRIPTION:	Stainless steel ball transfer heads (slip on style) (pair)		
LOAD CAPACITY	SHIPPING WEIGHT		
1,000 lbs	450 kg	5.50 lbs	2.50 kg



PART NO.	DESCRIPTION	LOAD CAPACITY		FOOTPRINT		ADJUSTMENT HEIGHT		SHIPPING WEIGHT	
3610	Six foot folding pipe jack with V-head	1,000 lbs	450 kg	38 x 38"	965.2 - 965.2 mm	39 - 72"	991 - 1,829 mm	44.10 lbs	20.00 kg




The B&B Adjustable Pipe Roller is used in pipe fabrication facilities and job-sites with thousands in use. The sturdy base and adjustable wheels are a favorite with medium size pipe fabrication projects allowing a stable work platform that allows pipe rotation.

B&B Adjustable 4 leg pipe roller stand just got better! After 30 years being the industry standard we have an upgraded and improved design, based on user feedback.



SPECIFICATIONS

- Stable 4 leg design with a 24 x 32" / 609.6 - 812.8 mm footprint.
- Removable wheel housings for ease of shipment and replacement.
- Self-centering head adjustment from either side
- T-handle brake to stop pipe rotation.
- Wheels can be easily adjusted to accommodate pipe up to 36".
- 1.5" wide wheels to reduce instances of 'pipe travel'.
- 1.5" wide wheels to reduce instances of 'pipe travel'.
- Widest in the industry.

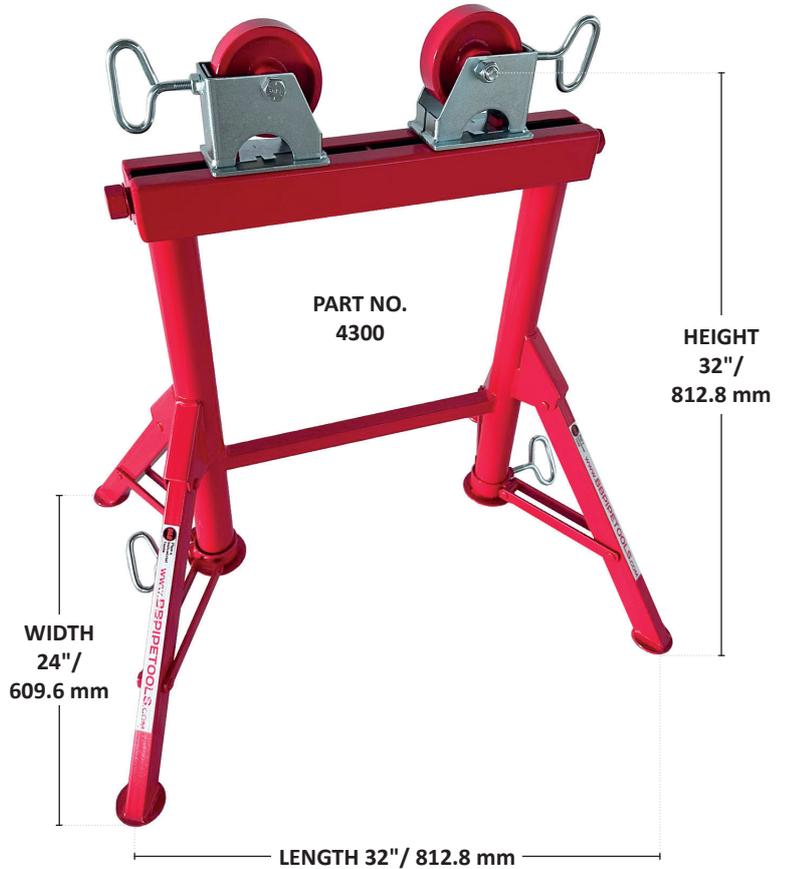

NEW AND IMPROVED

- **110% increased load capacity (heaviest duty in the industry). 5,290 lbs / 2,400 kg load capacity (with steel wheels).**
- Oversized square tube legs and braces for increased durability. 1 x 1.5" (largest in the industry).
- Square tube bracing offers additional strength and rigidity (heaviest duty box section in the industry).
- Folding leg design for easy storage and strength.
- User friendly.
- Increased footprint for additional stability.

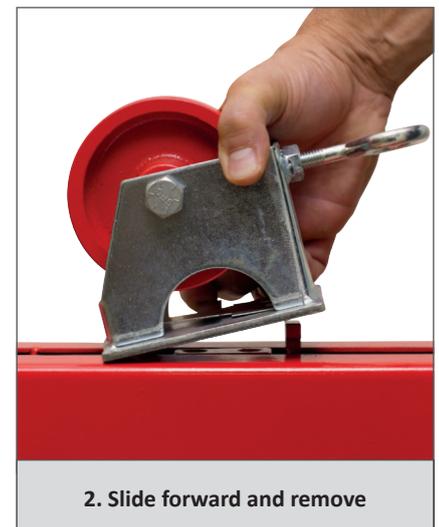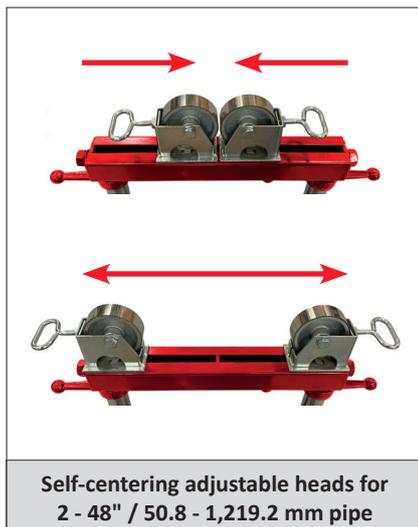



	PART NO.	DESCRIPTION				LOAD CAPACITY	
	4300	Adjustable 4 leg pipe roller with steel wheels (pair)				5,290 lbs	2,400 kg
	DIMENSIONS (L x W x H)		ADJUSTMENT HEIGHT		SHIPPING WEIGHT		
	32 x 24 x 32"	812.8 x 609.6 x 812.8 mm	32"	812.8 mm	47 lbs	21.00 kg	

	PART NO.	DESCRIPTION				LOAD CAPACITY	
	4315	Adjustable pipe roller with stainless steel wheels (pair)				5,290 lbs	2,400 kg
	DIMENSIONS (L x W x H)		ADJUSTMENT HEIGHT		SHIPPING WEIGHT		
	32 x 24 x 32"	812.8 x 609.6 x 812.8 mm	32"	812.8 mm	47 lbs	21.00 kg	

	PART NO.	DESCRIPTION				LOAD CAPACITY	
	4305	Adjustable pipe roller with phenolic wheels (pair)				1,000 lbs	450 kg
	DIMENSIONS (L x W x H)		ADJUSTMENT HEIGHT		SHIPPING WEIGHT		
	32 x 24 x 32"	812.8 x 609.6 x 812.8 mm	32"	812.8 mm	43 lbs	19.00 kg	

	PART NO.	DESCRIPTION				LOAD CAPACITY	
	4310	Adjustable pipe roller with stainless steel ball transfer (pair)				3,200 lbs	1,450 kg
	DIMENSIONS (L x W x H)		ADJUSTMENT HEIGHT		SHIPPING WEIGHT		
	32 x 24 x 32"	812.8 x 609.6 x 812.8 mm	32"	812.8 mm	44 lbs	20.00 kg	



PART NO.	90065		
DESCRIPTION: Quick change steel wheel heads (pair)			
LOAD CAPACITY		SHIPPING WEIGHT	
5,290 lbs	2,400 kg	6.60 lbs	3.00 kg

PART NO.	* 90066		
DESCRIPTION: Quick change stainless steel wheel heads (pair)			
LOAD CAPACITY		SHIPPING WEIGHT	
5,290 lbs	2,400 kg	6.60 lbs	3.00 kg

PART NO.	* 90067		
DESCRIPTION: Quick change phenolic wheel heads (pair)			
LOAD CAPACITY		SHIPPING WEIGHT	
1,000 lbs	450 kg	4.90 lbs	2.20 kg

PART NO.	* 90068		
DESCRIPTION: Quick change stainless steel ball transfer heads (pair)			
LOAD CAPACITY		SHIPPING WEIGHT	
3,200 lbs	1,450 kg	6.60 lbs	3.00 kg


* SUITABLE FOR STAINLESS STEEL



Heavy duty four leg height adjustable, pin lock pipe stands

The B&B Duo pipe stand accommodates pipes up to 48" / 1,219.2 mm, is height adjustable and equipped with quick change style heads.

The Duo pipe stand has locking brakes on the wheels to secure the load for marking, layout or fit-up and is supplied with folding legs as standard for ease of use and transport and has an ultra safe pin locking design.

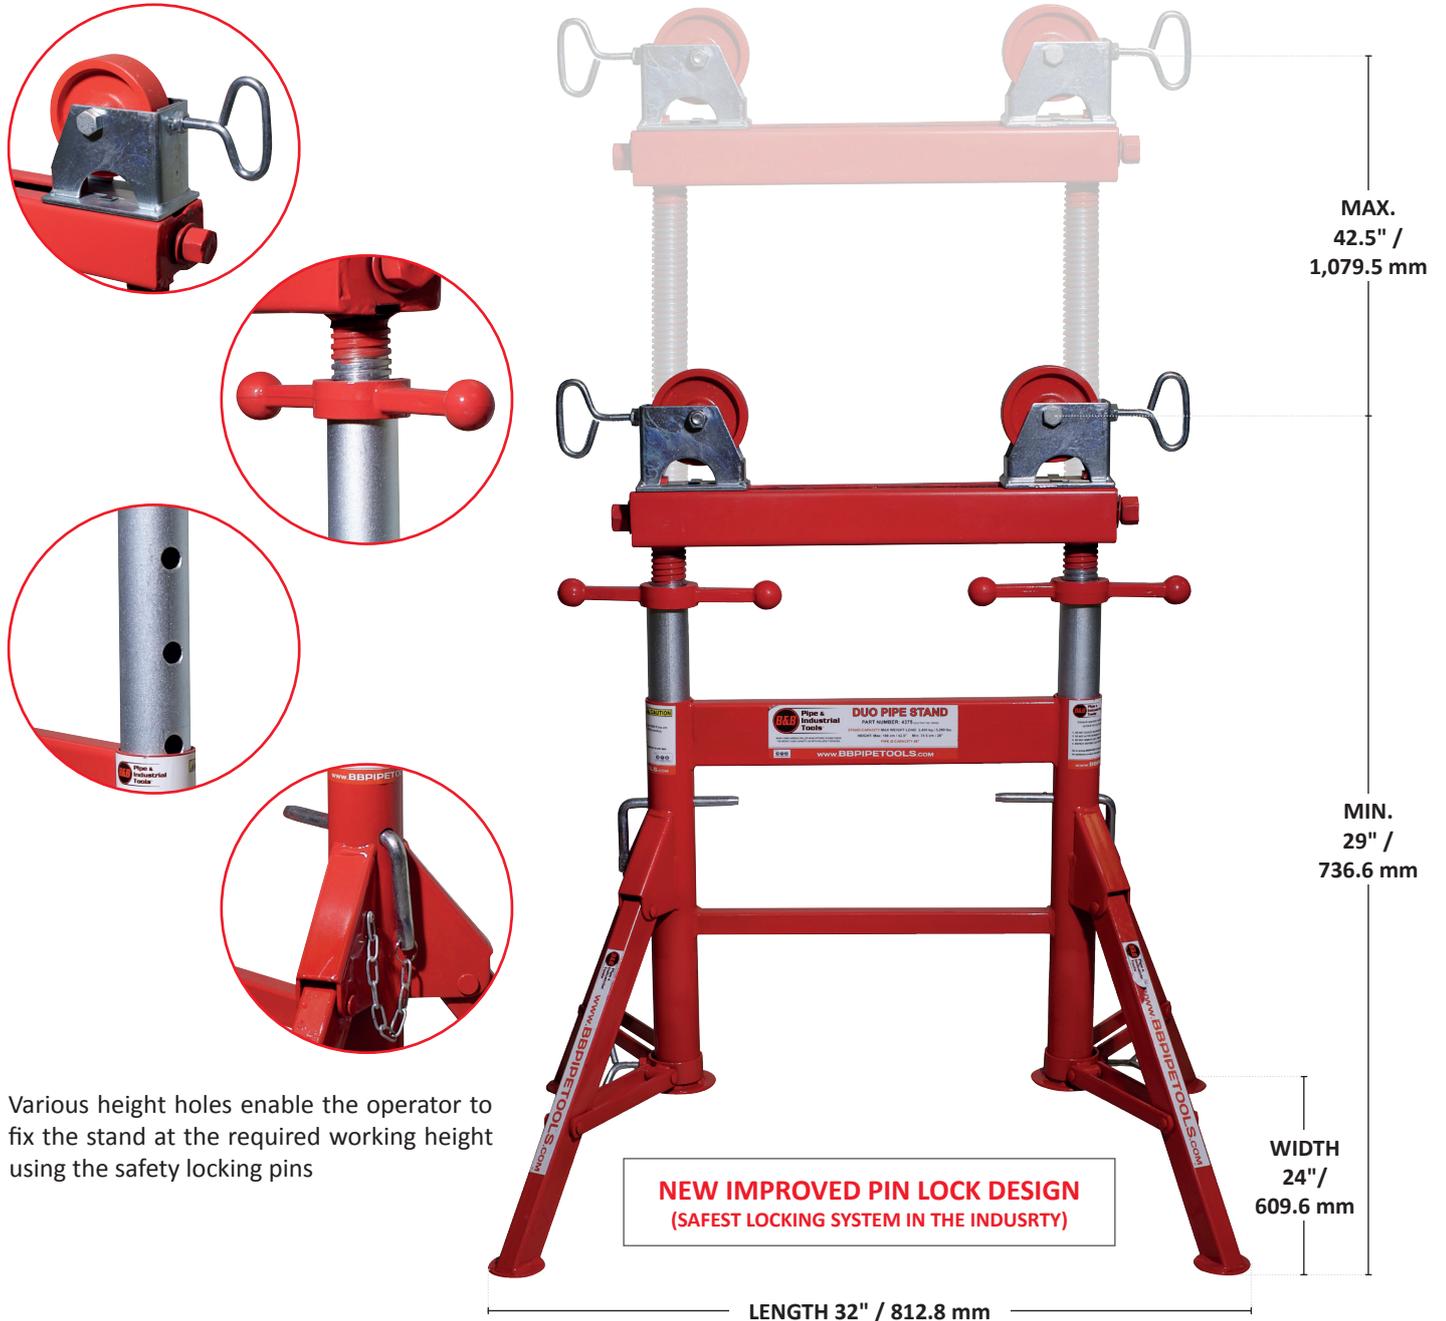

Various height holes enable the operator to fix the stand at the required working height using the safety locking pins

FEATURES AND ADVANTAGES

- 75% increased load capacity (heaviest duty in the industry). 5,290 lbs / 2,400 kg load capacity (with steel wheels).
- Oversized square tube legs and braces for increased durability. 1 x 1.5" (largest in the industry).
- Folding legs for ease of transport and storage
- Self-centering head adjustment from either side
- Height adjustable 29 - 42.5" / 736.6 - 1,079.5 mm
- 2 - 48" / 50.8 - 1,219.2 mm pipe diameter capacity
- Quick height adjustment with additional fine thread for workpiece levelling
- 'Trued' wheels eliminate 'corkscrewing' of pipe during rotation
- Lockable wheels to hold pipe in position
- Safety pins to lock stand at working height



The Duo pipe stand utilises a fine adjustment thread. This allows precise adjustment of the working height and can compensate for uneven surfaces to ensure the pipe is level at all times.


The unique safety locking pins allow the Duo pipe stand to be fixed at various working heights. Final adjustment and levelling can then be made with the fine adjustment handle.




SIMPLE HEAD CHANGEOVER

The quick change style heads increase the versatility of the Duo pipe stand. The heads can be changed without tools in a matter of seconds to adapt to almost all applications.


Roller wheels are available in steel, stainless steel or phenolic version. Ball transfer heads are available in steel or stainless steel.

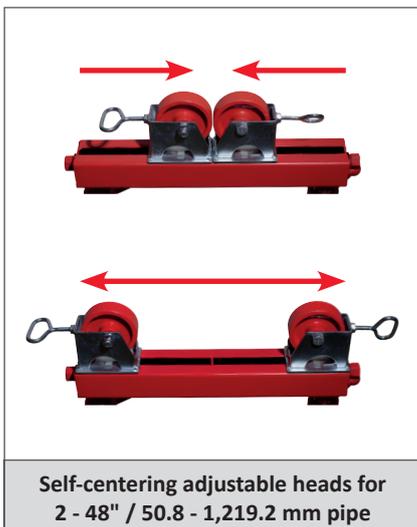

Self-centering adjustable heads for 2 - 48" / 50.8 - 1,219.2 mm pipe

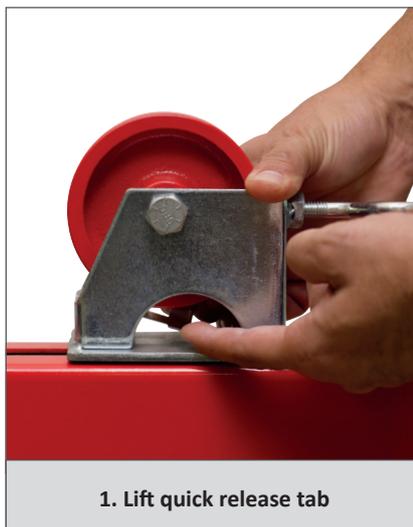


1. Lift quick release tab

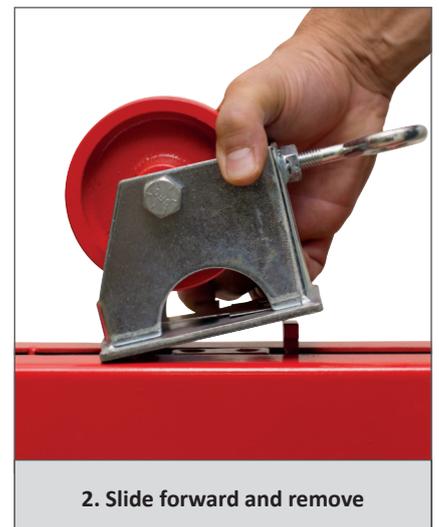

2. Slide forward and remove

DUO STAND™ HEIGHT ADJUSTABLE 4 LEG PIPE ROLLER STAND & HEAD OPTIONS



PART NO.	90039		
DESCRIPTION: Duo pipe stand (base unit only)			
LOAD CAPACITY		SHIPPING WEIGHT	
5,290 lbs	2,400 kg	46.30 lbs	21.00 kg


PART NO.	90065 / * 90066		
DESCRIPTION: Quick change steel wheel heads (pair) / Quick change stainless steel wheel heads (pair)			
LOAD CAPACITY		SHIPPING WEIGHT	
5,290 lbs	2,400 kg	9.40 lbs	4.25 kg

PART NO.	* 90067		
DESCRIPTION: Quick change phenolic wheel heads (pair)			
LOAD CAPACITY		SHIPPING WEIGHT	
1,000 lbs	450 kg	4.90 lbs	2.20 kg

PART NO.	* 90068		
DESCRIPTION: Quick change stainless steel ball transfer heads (pair)			
LOAD CAPACITY		SHIPPING WEIGHT	
3,200 lbs	1,450 kg	6.60 lbs	3.00 kg

* SUITABLE FOR STAINLESS STEEL

DUO STAND™ HEIGHT ADJUSTABLE 4 LEG PIPE ROLLER COMPLETE KITS



	PART NO.	DESCRIPTION			LOAD CAPACITY	
	4375	Duo Pipe Stand with steel wheels (pair)			5,290 lbs	2,400 kg
	DIMENSIONS (L x W x H)		ADJUSTMENT HEIGHT		SHIPPING WEIGHT	
	32 x 24 x 29"	82.8 x 609.6 x 736.6 mm	29 - 42.5"	736.6 - 1,079.5 mm	56 lbs	25.00 kg

	PART NO.	DESCRIPTION			LOAD CAPACITY	
	4390	Duo Pipe Stand with stainless steel wheels (pair)			5,290 lbs	2,400 kg
	DIMENSIONS (L x W x H)		ADJUSTMENT HEIGHT		SHIPPING WEIGHT	
	32 x 24 x 29"	82.8 x 609.6 x 736.6 mm	29 - 42.5"	736.6 - 1,079.5 mm	56 lbs	25.00 kg

	PART NO.	DESCRIPTION			LOAD CAPACITY	
	4380	Duo Pipe Stand with phenolic wheels (pair)			1,000 lbs	450 kg
	DIMENSIONS (L x W x H)		ADJUSTMENT HEIGHT		SHIPPING WEIGHT	
	32 x 24 x 29"	82.8 x 609.6 x 736.6 mm	29 - 42.5"	736.6 - 1,079.5 mm	51 lbs	23.00 kg

	PART NO.	DESCRIPTION			LOAD CAPACITY	
	4385	Duo Pipe Stand with stainless steel ball transfer (pair)			3,200 lbs	1,450 kg
	DIMENSIONS (L x W x H)		ADJUSTMENT HEIGHT		SHIPPING WEIGHT	
	32 x 24 x 29"	82.8 x 609.6 x 736.6 mm	29 - 42.5"	736.6 - 1,079.5 mm	53 lbs	24.00 kg



RAPID, SELF CENTERING PIPE TRESTLES

* SUITABLE FOR STAINLESS STEEL

This quick change roller stand is the top part of the popular duo pipe stand and is suitable to be floor or bench mounted.

Available with 2 adjustable head styles to suit pipes from 2 - 48" / 50.8 - 1,219.2 mm.

PART NO.	90063		
DESCRIPTION:	Quick change roller (base unit only)		
LOAD CAPACITY		SHIPPING WEIGHT	
5,290 lbs	2,400 kg	13.00 lbs	5.90 kg

PART NO.	90065 / * 90066		
DESCRIPTION:	Quick change steel wheel heads (pair) / Quick change stainless steel wheel heads (pair)		
LOAD CAPACITY		SHIPPING WEIGHT	
5,290 lbs	2,400 kg	9.40 lbs	4.25 kg

PART NO.	* 90067		
DESCRIPTION:	Quick change phenolic wheel heads (pair)		
LOAD CAPACITY		SHIPPING WEIGHT	
1,000 lbs	450 kg	4.90 lbs	2.20 kg

PART NO.	* 90068		
DESCRIPTION:	Quick change stainless steel ball transfer heads (pair)		
LOAD CAPACITY		SHIPPING WEIGHT	
3,200 lbs	1,450 kg	6.60 lbs	3.00 kg



TRI-STAND CHAIN VICE & PIPE CHAIN VICE CLAMP



The B&B Tri-stand chain vice is a proven design used on construction sites around the globe.

SPECIFICATIONS

- Durable cast aluminium head balances light weight and durability.
- Heavy duty hold down tightening device with replaceable jaw.
- Folding legs with chain lock.
- Leg bracing doubles as a lipped shelf for holding additional tooling and machines.
- Up to 6" pipe capacity
- Boxed and fully assembled, ready for immediate use (box dimensions: 46 x 18 x 16" / 1,168.4 x 457.2 x 406.4 mm)
- Heavy duty jaws
- 55" width x 35" height / 1,397 x 889 mm (working dimensions)
- 1,000 lbs / 450 kg capacity

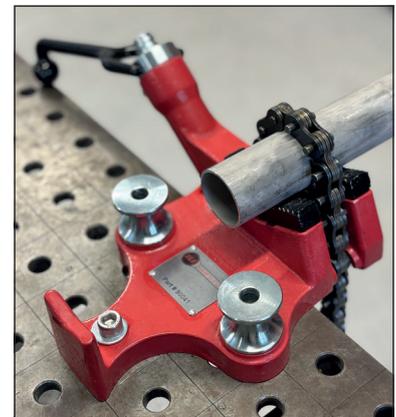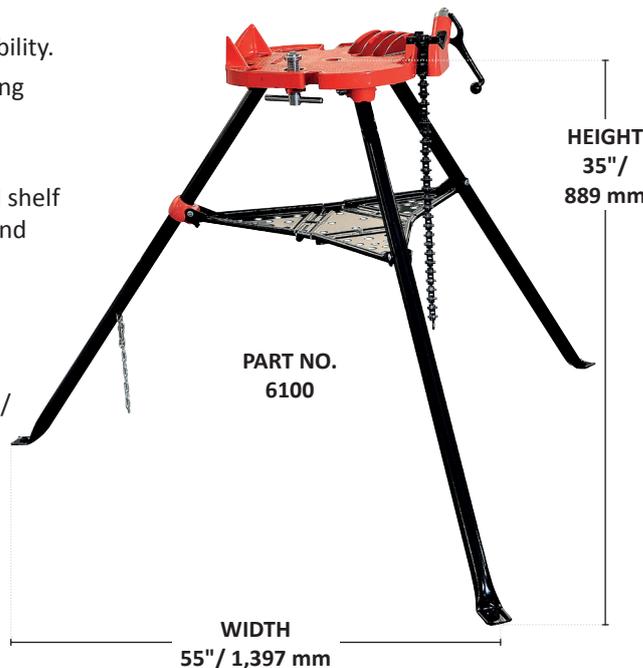

PART NO.	DESCRIPTION	LOAD CAPACITY		SHIPPING WEIGHT	
6100	Tri-stand chain vice - up to 6" pipe diameter capacity	1,000 lbs	450 kg	49.00 lbs	22.00 kg
90041	Pipe chain vice clamp - up to 6" pipe diameter capacity	1,000 lbs	450 kg	11.00 lbs	5.00 kg



The B&B 3 Leg Giant Jack offers the same pipe diameter capacity of 36" and same capacity ratings as the 5 Leg Giant Jack, but is used in a static position.

The solid 1 3/4" (1.75") ACME rod height adjustment sets the B&B Giant Jack apart from our competitor's hollow ACME-threads, along with increased leg tube dimensions.

Multiple wheel options including steel, stainless steel and rubber are ideal for a variety of applications.

SPECIFICATIONS

- Rated at 5,000 lbs / 2,265 kg capacity with no wheels and 2,500 lbs / 1,135 kg with steel wheels
- Operating height 33 - 44" / 838.2 - 1,117.6 mm
- Available with steel, stainless steel or rubber wheels
- 32" / 812.8 mm wide stance increases stability
- Recommended for up to 36" / 914 mm pipe
- Increased leg wall thickness and increased tube dimension adds greater strength for bigger pipe fabrication
- Solid 1 3/4" (1.75") ACME rod comes standard with all B&B giant jacks
- Nylon washer allows smooth raising and lowering of the V-head



PART NO.	3501		
DESCRIPTION:	Three leg giant jack (jack only)		
LOAD CAPACITY	SHIPPING WEIGHT		
5,000 lbs	2,265 kg	64.00 lbs	29.00 kg



Hold down chain device 3506 locks pipe to jack



PART NO.	3512		
DESCRIPTION:	Giant 3 package ST (jack and steel wheels)		
LOAD CAPACITY	SHIPPING WEIGHT		
2,500 lbs	1,135 kg	70.00 lbs	32.00 kg



PART NO.	3513		
DESCRIPTION:	Giant 3 package RU (jack and rubber wheels)		
LOAD CAPACITY	SHIPPING WEIGHT		
1,000 lbs	450 kg	65.00 lbs	30.00 kg



PART NO.	* 3509		
DESCRIPTION:	Ball transfer stainless steel (pair) V-head not included		
LOAD CAPACITY	SHIPPING WEIGHT		
1,000 lbs	450 kg	6.60 lbs	3.00 kg



PART NO.	* 3507		
DESCRIPTION:	Stainless steel sleeves (pair) V-head not included		
LOAD CAPACITY	SHIPPING WEIGHT		
5,000 lbs	2,265 kg	2.20 lbs	1.00 kg






The B&B 5 Leg giant jack is ideal for large diameter pipes (up to 36") and its V-head can be equipped with multiple options.

The 5 Leg giant jack can be fitted with caster wheels, allowing pipe movement.

The 5 Leg giant jack is characterised by its increased steel dimensions throughout, including 1 3/4" (1.75") solid ACME rod, making it the toughest on the market.

SPECIFICATIONS

- Urethane over steel casters with solid hub increase safety and durability
- 5,000 lbs / 2,265 kg capacity without wheels and casters
- 2,500 lbs / 1,135 kg capacity with steel wheels and urethane casters
- Operating height with swivel casters: 32 - 44" / 812.8 - 1,117.6 mm
- Operating height with jack only: 24 - 36" / 609.6 - 914.4 mm
- Minimum - maximum pipe diameter 1 - 36" / 25.4 - 914.4 mm
- Solid 1 3/4" (1.75") ACME-thread adjustment
- 1.5" wide steel / phenolic wheels to reduce instances of "pipe travel"
- Can be purchased as a complete kit as shown: jack, casters, and wheels
- Turning wheels available in steel, stainless steel, and phenolic
- Multiple add-ons available, including stainless steel sleeves for contamination free fit-up, recommended hold down chain device for transport, ball transfer attachments for variation of pipe movement and more

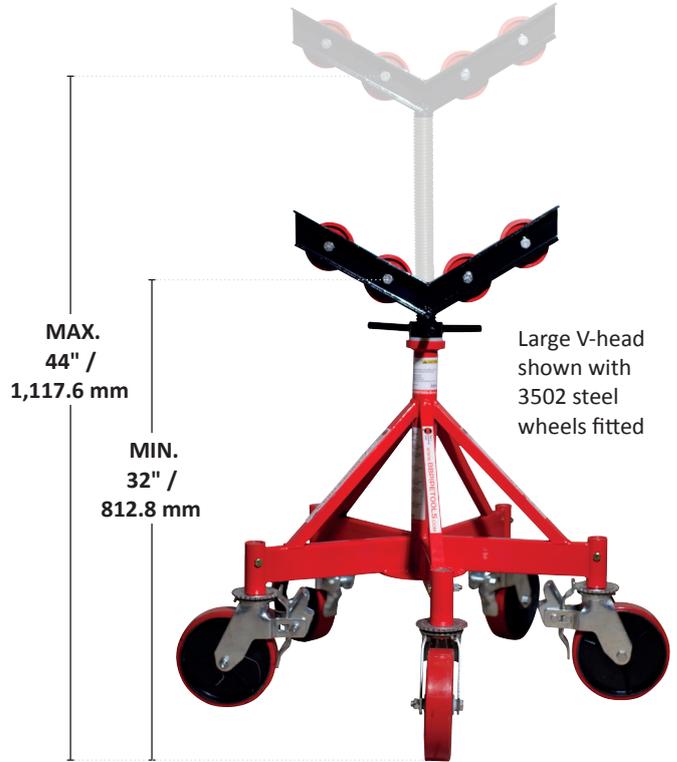

Transport pipes around the site or workshop with ease.



Shown with 3504 caster wheel kit fitted and 3506 hold down chain device



Hold down chain device 3506 locks pipe to jack



Levelling pads - optional PART NO. 3500-1



* SUITABLE FOR STAINLESS STEEL

PART NO.	3500			
DESCRIPTION:	5 Leg Giant Jack (base and V-head)			
LOAD CAPACITY		SHIPPING WEIGHT		
5,000 lbs	2,265 kg	64.00 lbs	29.00 kg	

5 Leg Giant base can be fitted with levelling pads or caster roller wheels kit set

PART NO.	3500-1			
DESCRIPTION:	Levelling pads for 3500 (set of 5)			
LOAD CAPACITY		SHIPPING WEIGHT		
5,000 lbs	2,265 kg	5 lbs	2.5 kg	

PART NO.	3504			
DESCRIPTION:	Caster roller wheel kit for Part No. 3500 (5 casters)			
LOAD CAPACITY		SHIPPING WEIGHT		
5,000 lbs	2,265 kg	37.5 lbs	17.00 kg	

5 LEG GIANT V-HEAD OPTIONS:

PART NO.	3502			 V-head not included
DESCRIPTION:	Steel wheel kit (4 wheels) - 1 1/2" wide wheels			
LOAD CAPACITY		SHIPPING WEIGHT		
5,000 lbs	2,265 kg	12.30 lbs	5.60 kg	

PART NO.	* 3508			 V-head not included
DESCRIPTION:	Stainless steel wheel kit (4 wheels) - 1 1/2" wide wheels			
LOAD CAPACITY		SHIPPING WEIGHT		
5,000 lbs	2,265 kg	12.30 lbs	5.60 kg	

PART NO.	* 3503			 V-head not included
DESCRIPTION:	Phenolic wheel kit (4 wheels) - 1 1/2" wide wheels			
LOAD CAPACITY		SHIPPING WEIGHT		
1,000 lbs	450 kg	4.40 lbs	2.00 kg	

PART NO.	* 3509			 V-head not included
DESCRIPTION:	Ball transfer stainless steel (pair)			
LOAD CAPACITY		SHIPPING WEIGHT		
1,000 lbs	450 kg	6.60 lbs	3.00 kg	

PART NO.	* 3507			 V-head not included
DESCRIPTION:	Stainless steel sleeves (pair)			
LOAD CAPACITY		SHIPPING WEIGHT		
5,000 lbs	2,265 kg	2.20 lbs	1.00 kg	

PART NO.	3506			
DESCRIPTION:	Hold down chain device			
LOAD CAPACITY		SHIPPING WEIGHT		
n/a	n/a	15.40 lbs	7.00 kg	



* SUITABLE FOR STAINLESS STEEL

	PART NO.	DESCRIPTION				LOAD CAPACITY	
	3510	5 Leg Giant Jack with steel wheels and casters				5,000 lbs	2,265 kg
	DIMENSIONS (L x W x H)		ADJUSTMENT HEIGHT		SHIPPING WEIGHT		
	30 x 30 x 32"	762 x 762 x 812.8 mm	32 - 44"	812.8 - 1,117.6 mm	114 lbs	52.00 kg	


	PART NO.	DESCRIPTION				LOAD CAPACITY	
	3514	5 Leg Giant Jack with stainless steel wheels and casters				5,000 lbs	2,265 kg
	DIMENSIONS (L x W x H)		ADJUSTMENT HEIGHT		SHIPPING WEIGHT		
	30 x 30 x 32"	762 x 762 x 812.8 mm	32 - 44"	812.8 - 1,117.6 mm	114 lbs	52.00 kg	

	PART NO.	DESCRIPTION				LOAD CAPACITY	
	3511	5 Leg Giant Jack with phenolic wheels and casters				1,000 lbs	450 kg
	DIMENSIONS (L x W x H)		ADJUSTMENT HEIGHT		SHIPPING WEIGHT		
	30 x 30 x 32"	762 x 762 x 812.8 mm	32 - 44"	812.8 - 1,117.6 mm	106 lbs	48.00 kg	

	PART NO.	DESCRIPTION				LOAD CAPACITY	
	3518	5 Leg Giant Jack with stainless steel ball transfer and casters				1,000 lbs	450 kg
	DIMENSIONS (L x W x H)		ADJUSTMENT HEIGHT		SHIPPING WEIGHT		
	30 x 30 x 32"	762 x 762 x 812.8 mm	32 - 44"	812.8 - 1,117.6 mm	108 lbs	49.00 kg	




MEGA ROLLERS & STANDS



**Pipe &
Industrial
Tools™**

AN **SCS** GROUP BRAND




The B&B mega roller (6,000 lbs / 2,721 kg) is a high capacity pipe roller designed for heavy duty job-site use.

Its oversized 6 x 3" wheels have a urethane over steel design, offering numerous advantages: they allow ultra smooth pipe rotation via heavy duty sealed bearings, for both steel, stainless steel and exotic alloys pipe. The unique head design also allows the removal of the wheels, transforming to a V-head stand restricting pipe rotation.

The robust construction, with its twin solid ACME rods, allows to raise and lower the headstock and wheels for precise fit-ups even under load.

All mega rollers are powder coated, have quick release axle pins, and are modular allowing additional feed wheels and casters for mega movement.

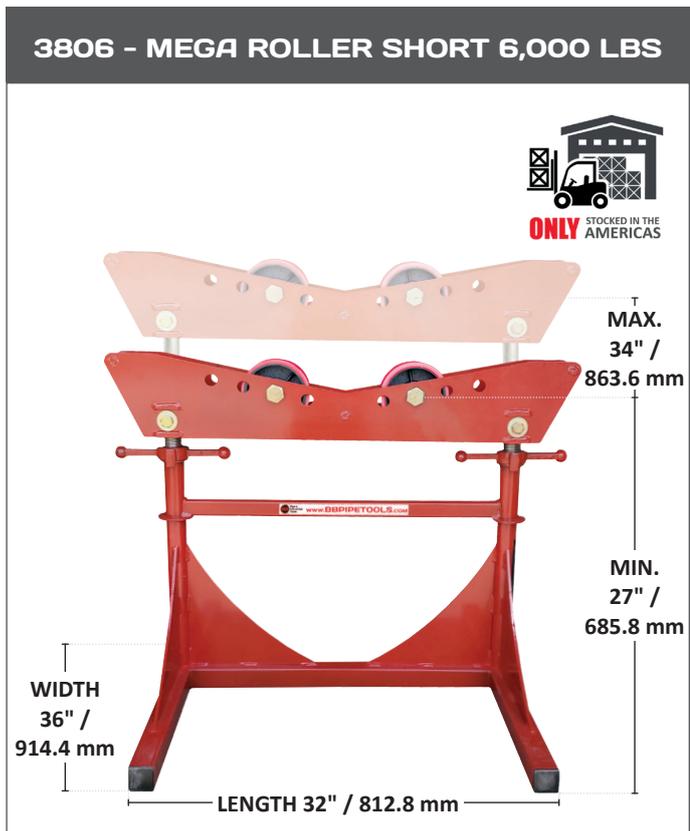

SPECIFICATIONS

- Load capacity: 6,000 lbs / 2,720 kg
- Pipe capacity: 4 - 48" / 101.6 - 1,219.2 mm
- Working height: 31 - 48" / 787.4 - 1,219.2 mm
- 6 x 3" heavy duty urethane over steel wheels with sealed bearings for smooth pipe rotation
- Contamination free wheels are ideal for steel and exotic pipe fabrication
- Heavy gauge steel construction throughout. These mega rollers are made for years of job-site usage
- Powder coated safety red for high visibility
- Expanded foot print at 36 x 32" / 914.4 x 812.8 mm increases pipe stability



PART NO.	DESCRIPTION	LOAD CAPACITY		PIPE CAPACITY		ADJUSTMENT HEIGHT		SHIPPING WEIGHT	
3806	Mega Roller Short 6,000 lbs	6,000 lbs	2,720 kg	4 - 48"	101.6 - 1,219.2 mm	27 - 34"	685.8 - 863.6 mm	118.00 lbs	54.00 kg
3807	Mega Roller Tall 6,000 lbs	6,000 lbs	2,720 kg	4 - 48"	101.6 - 1,219.2 mm	31 - 48"	787.4 - 1,219.2 mm	105.80 lbs	48.00 kg




The B&B mega roller (10,000 lbs / 4,535 kg) is a high capacity pipe roller designed for heavy duty job-site use.

Its oversized 10 x 3" / 250 - 75 mm wheels have an urethane over steel design, offering numerous advantages: they allow ultra smooth pipe rotation via heavy duty sealed bearings, for both steel, stainless steel and exotic alloys pipe. The unique head design also allows the removal of the wheels, transforming to a V-head stand restricting pipe rotation.

The robust construction, with its twin solid ACME rods, allows to raise and lower the headstock and wheels for precise fit-ups even under load.

All mega rollers are powder coated, have quick release axle pins, and are modular allowing additional feed wheels and casters for mega movement.

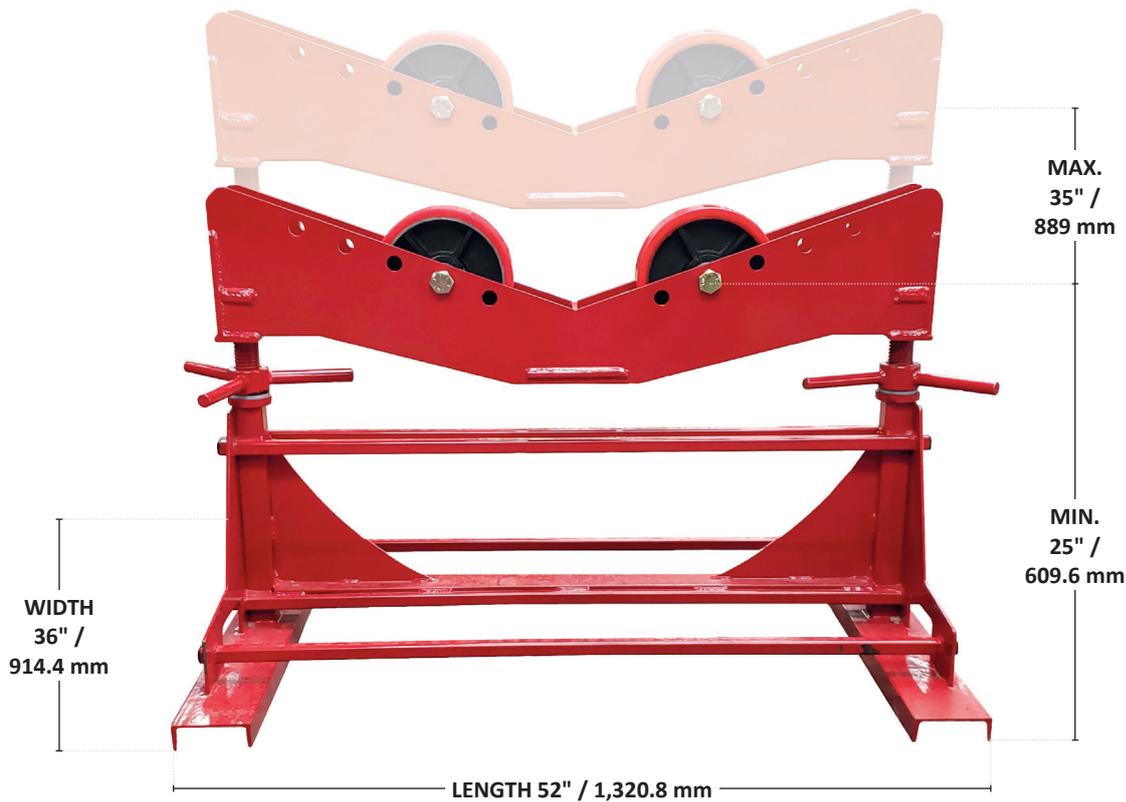

SPECIFICATIONS

- Load capacity: 10,000 lbs / 4,535 kg
- Pipe capacity: 4 - 60" / 101.6 - 1,524 mm
- Working height: 25 - 35" / 609.6 - 889 mm
- 10 x 3" heavy duty urethane over steel wheels with sealed bearings for smooth pipe rotation
- Contamination free wheels are ideal for steel and exotic pipe fabrication
- Heavy gauge steel construction throughout. These mega rollers are made for years of job-site usage
- Powder coated safety red for high visibility
- Expanded foot print at 36 x 52" / 914.4 x 1,320.8 mm increases pipe stability
- Four side fork lift access



PART NO.	DESCRIPTION	LOAD CAPACITY		PIPE CAPACITY		ADJUSTMENT HEIGHT		SHIPPING WEIGHT	
3802	Mega Roller 10,000 lbs	10,000 lbs	4,535 kg	4 - 60"	101.6 - 1,524 mm	25 - 35"	609.6 - 889 mm	264.60 lbs	120.00 kg




The B&B mega roller (15,000 lbs / 6,800 kg) is a high capacity pipe roller designed for heavy duty job-site use. This mega roller is built on the same platform as the 10,000 lbs / 4,535 kg roller, but has an increased headstock width and two additional wheels added.

Its oversized 10 x 3" / 250 - 75 mm wheels have an urethane over steel design, offering numerous advantages: they allow ultra smooth pipe rotation via heavy duty sealed bearings, for both steel, stainless steel and exotic alloys pipe. The unique head design also allows the removal of the wheels, transforming to a V-head stand restricting pipe rotation.

The robust construction, with its twin solid ACME rods, allows to raise and lower the headstock and wheels for precise fit-ups even under load.

All mega rollers are powder coated, have quick release axle pins, and are modular allowing additional feed wheels and casters for mega movement.

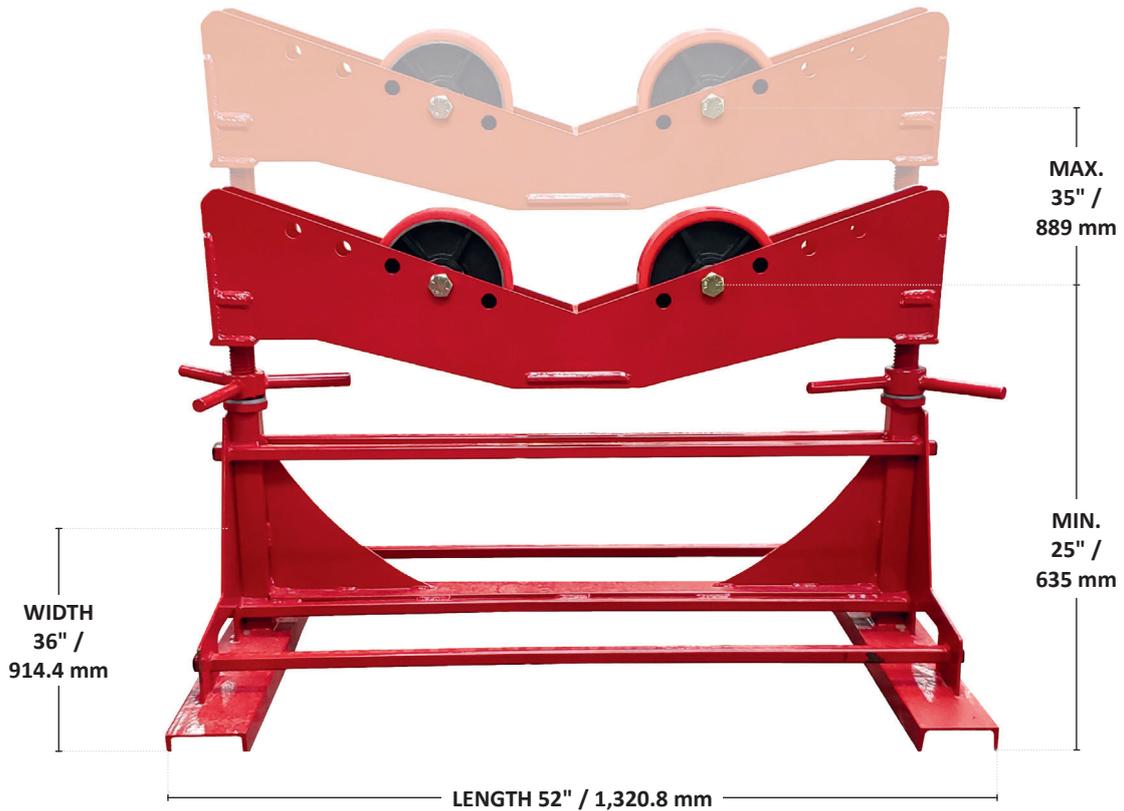

SPECIFICATIONS

- Load capacity: 15,000 lbs / 6,800 kg
- Pipe capacity: 4 - 60" / 101.6 - 152.4 mm
- Working height: 25 - 35" / 635 - 889 mm
- Four 10 x 3" heavy duty urethane over steel wheels with sealed bearings for smooth pipe rotation
- Contamination free wheels are ideal for steel and exotic pipe fabrication
- Heavy gauge steel construction throughout. These mega rollers are made for years of job-site usage
- Powder coated safety red for high visibility
- Expanded foot print at 36 x 52" / 914.4 x 1,320.8 mm increases pipe stability
- Four side fork lift access



PART NO.	DESCRIPTION	LOAD CAPACITY		PIPE CAPACITY		ADJUSTMENT HEIGHT		SHIPPING WEIGHT	
3808	Mega Roller 15,000 lbs	15,000 lbs	6,800 kg	4 - 60"	101.6 - 152.4 mm	25 - 35"	635 - 889 mm	349.90 lbs	158.70 kg



The 3 Leg B&B Mega Jacks offer a wider and safer stance offering increased stability.

All Mega Jacks offer a large 16" V-head with reinforced V-gussets for added strength, increasing the load capacity to 5,000 lbs

Height adjustment is 1 3/4" (1.75") solid ACME-thread and the elimination of the adjustment washer, inside tube and T-handle simplify use and reduce instances of potential operator error.



SPECIFICATIONS

- Double reinforced V-head
- Increased V-head dimensions allows for up to 32" pipe diameters
- Over-sized legs and braces for increased capacity
- Third party tested with over a 3:1 safety ratio
- Increased footprint for additional stability
- Machined ACME nut with tri-handle increases durability and adjustment ability
- 5,000 lbs load capacity!
- Heavy-duty 1 3/4" (1.75") solid ACME rod adjustment




PART NO.	DESCRIPTION	LOAD CAPACITY		ADJUSTMENT HEIGHT		SHIPPING WEIGHT	
3600	Mega Jack - 3 Leg	5,000 lbs	2,300 kg	32 - 44"	812.8 x 1,117.6 mm	40.00 lbs	18.00 kg



The 4 Leg B&B Mega Jacks offer a wider and safer stance offering increased stability.

All Mega Jacks offer a large 16" V-head with reinforced V-gussets for added strength, increasing the load capacity to 5,000 lbs!

Height adjustment is 1 3/4" (1.75") solid ACME-thread and the elimination of the adjustment washer, inside tube and T-handle simplify use and reduce instances of potential operator error.

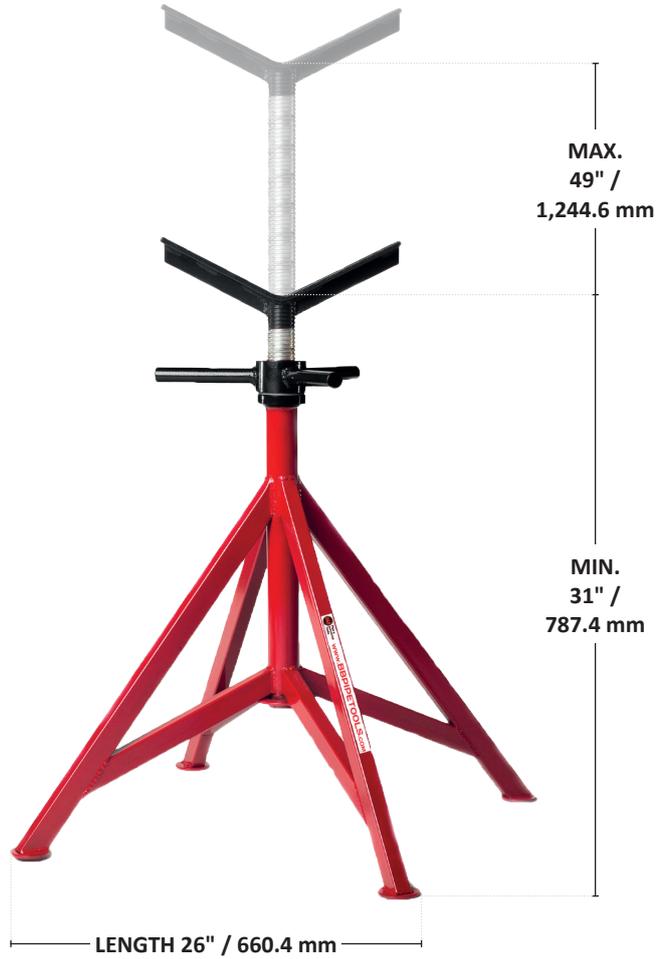

SPECIFICATIONS

- Double reinforced V-head
- Increased V-head dimensions allows for up to 32" pipe diameters
- Over-sized legs and braces for increased capacity
- Third party tested with over a 3:1 safety ratio
- Increased footprint for additional stability
- Machined ACME nut with tri-handle increases durability and adjustment ability
- 5,000 lbs load capacity!
- Heavy-duty 1 3/4" (1.75") solid ACME rod adjustment



PART NO.	DESCRIPTION	LOAD CAPACITY		ADJUSTMENT HEIGHT		SHIPPING WEIGHT	
3604	Mega Jack - 4 Leg	5,000 lbs	2,300 kg	31 - 49"	787.4 - 1,244.6 mm	42.00 lbs	19.00 kg



NEW DESIGN

The B&B Mega Horse is ideal for storing flats and rounds. Robust construction allows years of use and abuse in an engineered and tested design.

Powder coating and clear capacity rated labeling makes this a long lasting and safe solid steel sawhorse.

SPECIFICATIONS

- A-frame leg design bracing from center of beam to legs for three point support
- 1.5 x 3" / 40 - 80 mm leg box section
- I-beam top 5 x 3" / 120 x 75 mm
- Third party load capacity tested

NEW AND IMPROVED


- Oversized square tube legs and braces for increased durability 1.5 x 3" / 40 - 80 mm (largest in the industry)
- Square tube bracing offers additional strength and rigidity (heaviest duty box section in the industry)
- Bolt together design for easy storage and strength
- User friendly
- Increased footprint for additional stability
- Improved I-beam top 5 x 3" / 120 x 75 mm



PART NO.	DESCRIPTION	LOAD CAPACITY		DIMENSIONS (L x W x H)		ADJUSTMENT HEIGHT	SHIPPING WEIGHT	
3820	Mega Horse	12,000 lbs	5,445 kg	60 x 37 x 36"	152.4 x 939.8 x 914.4 mm	Fixed	172.00 lbs	78.00 kg



HANDLING & LIFTING EQUIPMENT



**Pipe &
Industrial
Tools™**

AN **SCS** GROUP BRAND



The B&B Pipe cart is a six wheeled, low height, narrow width cart that is strong enough to carry 2,000 lbs / 910 kg, but agile enough to turn and fit through doorways with ease. The push handles and V-block can be unassembled and stored in seconds when not in use.

If you remove the V-block attachment from the cart you have a 2,000 lbs / 910 kg cart capable of moving just about anything within rated capacity. The carts can be stacked for shipment and storage, and the casters ship assembled to the cart ready for use.



Folds and stacks



SPECIFICATIONS

- Transports pipe up to 24 foot / 7,315.2 mm in length.
- Pipe capacity: up to 36"
- 6 wheels ideal for workshop transportation
- Removable V for squares and flats.
- Removable handles for stacking and storage.

www.bbpiptools.com


PART NO.	DESCRIPTION	LOAD CAPACITY		DIMENSIONS (L x W x H)		PIPE CAPACITY	SHIPPING WEIGHT	
2015-6F	Pipe cart with floor	2,000 lbs	910 kg	57 x 34 x 39"	1,447.8 x 863.6 x 990.6 mm	up to 36" diameter pipe	185.20 lbs	84.00 kg



B&B Conduit Carts are not only for conduit. Any rounds that need to be stacked or separated fit into the 8 holding sections, and with four heavy-duty wheels the carts allow easy movement around the job-site. The gravity lock hinge mechanism adds an increased safety feature by eliminating an instance of user error, and the stacking cups provide efficient storage and transport when the carts are not in use. All carts are modular in construction and stack and store with one another.

SPECIFICATIONS

- The B&B conduit cart/pipe tree separates rounds, and the upright portions fold down for stacking, storage and transport
- This conduit cart offers increased base support and flooring
- The hinge mechanism gravity locks into place for set up, and a simple pull of the pin unlocks the uprights for easy folding
- Two 6" static wheels, and two 6" swivel wheels allow easy movement through tight working environments
- 1,000 lbs / 450 kg load capacity
- L57 x W34 x H62" (folded height - 20") / 1,447.8 x 863.6 x 1,574.8 mm (folded height - 508 mm)

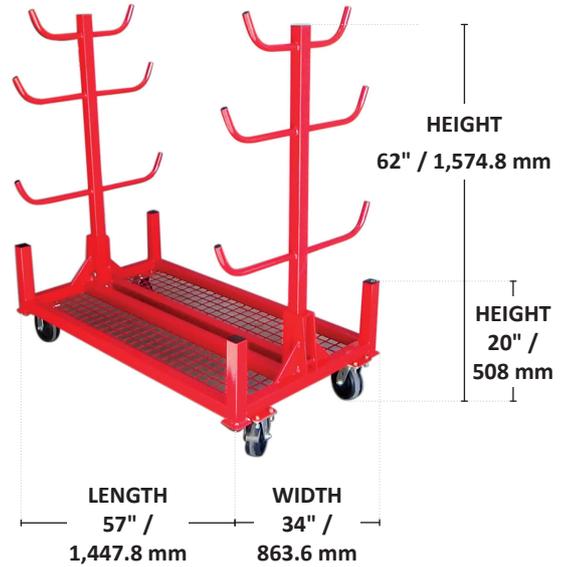

Patent pending gravity lock system safely secures tube uprights in position!



PART NO.	DESCRIPTION	LOAD CAPACITY		DIMENSIONS (L x W x H)		SHIPPING WEIGHT	
2033-4F	Conduit cart, 4 wheels, with floor	1,000 lbs	450 kg	57 x 34 x 62"	1,447.8 x 863.6 x 1,574.8 mm	180.00 lbs	82.00 kg



The B&B Crate Cart is a nice addition to the B&B cart line and works on the same modular platform. This simple, yet effective, four sided cart is a great storage and transport cart that handles a 1,500 lbs / 680 kg load capacity and yet still fits through a 36" door frame common on job-sites. Two fixed and two swivel 6" steel wheels are standard. Cart shipped assembled.



SPECIFICATIONS

- Heavy gauge 2" square tubing means robust construction and light weight transport
- Great for storing pipe fittings and welding gear, or extension cords and electrical supplies, not to mention plumbing equipment or even carpentry tools and lumber
- Stacks for shipment and transport to and from job-sites when empty
- Modular design stacks with all B&B carts
- 1,500 lbs / 680 kg load capacity

PART NO.	DESCRIPTION	LOAD CAPACITY		DIMENSIONS (L x W x H)		SHIPPING WEIGHT	
2034-4	Crate Cart, 4 wheels	1,500 lbs	680 kg	57 x 34 x 24"	1,447.8 x 863.6 x 609.6 mm	250.00 lbs	114.00 kg



Folds easily for storage, stacking and transport


The B&B Bundle Cart is similar to the B&B Pipe Cart, but is designed for the storage and transport of multiple smaller diameter pipe, tube, and/or conduit.

The fold down brackets can rest in a lowered position allowing storage, stacking and transport efficiency.

Robust 2" square heavy gauge tubing and oversized 6" caster make the B&B bundle cart a great addition to many job-sites across multiple trades.

SPECIFICATIONS

- Heavy gauge solid steel construction and replaceable wheels for years of use
- U-bracket folds down for storage and transport of the cart, and locks up in position for heavy-duty bundle storage of pipe, tubing and conduit
- The Bundle cart utilizes a modular design which makes storage and transport of multiple cart types possible
- 6" wheels standard
- 1,000 lbs / 450 kg load capacity

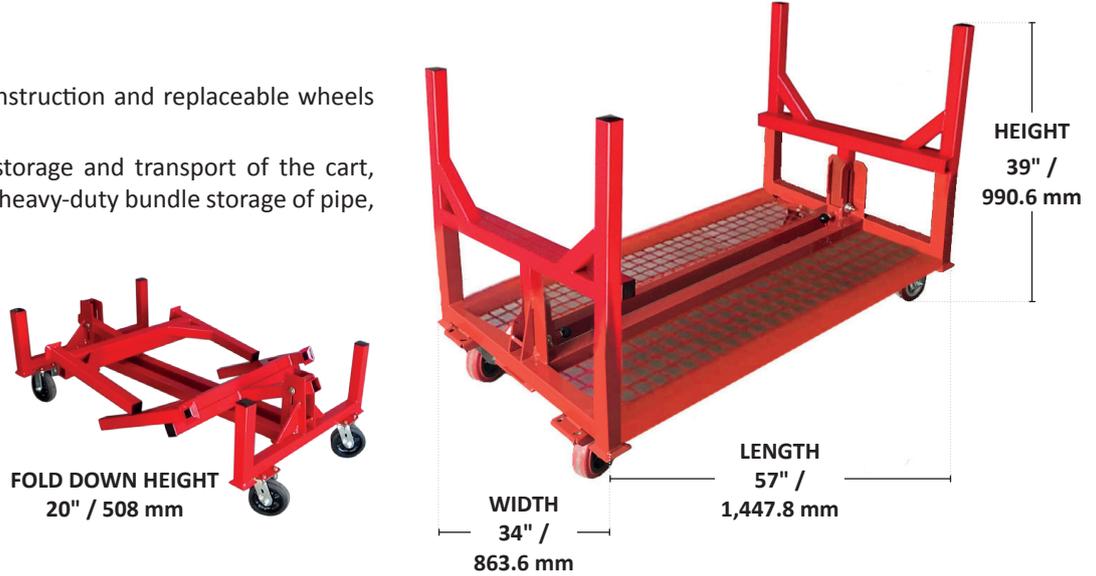


PART NO.	DESCRIPTION	LOAD CAPACITY		DIMENSIONS (L x W x H)		SHIPPING WEIGHT	
2031-4F	Bundle cart, 4 wheels, with floor	1,000 lbs	450 kg	57 x 34 x 39"	1,447.8 x 863.6 x 990.6 mm	226 lbs	102.3 kg



Folds easily for storage, stacking and transport

New in the B&B stacker cart line is the hanger cart. The B&B hanger cart is a modular design that stacks and folds for efficient shipping and storage, just like all B&B stacker carts. These carts can be loaded with various clevises and pushed into the installation location with ease. Once the job is complete or the carts are no longer needed, fold them, stack them, and ship or store them.

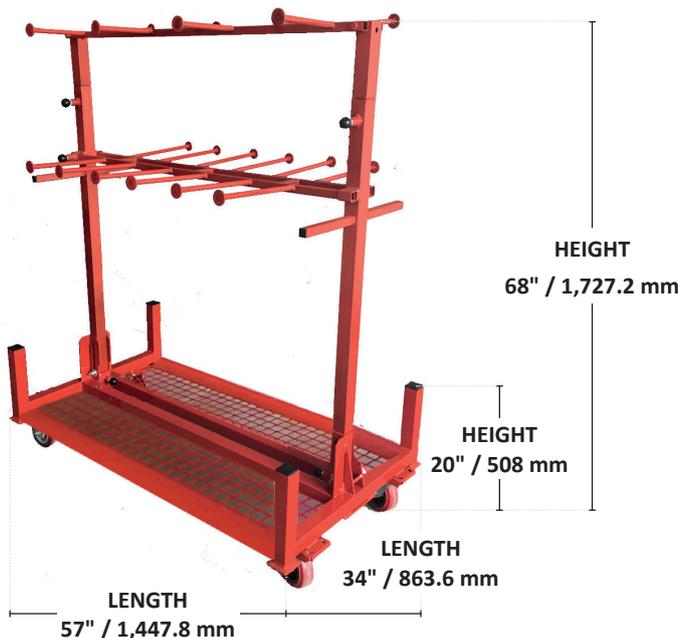

SPECIFICATIONS

- Patented gravity lock system. Secures uprights in position. Simply lift uprights from folded position into place, and let gravity do its job. Uprights securely locks into position without the need to disengage pull pin
- Foldable and stackable for efficient transportation and storage. The B&B cup stacking system ensures carts stay stacked and secured
- Urethane over hub - E-Z glide wheels on all carts
- Red for safety: visible on the job site or in the shop

PART NO.	DESCRIPTION	LOAD CAPACITY		DIMENSIONS (L x W x H)		SHIPPING WEIGHT	
2036-4F	Hanger Cart, 4 wheels, with floor	1,000 lbs	450 kg	57 x 34 x 68"	1,447.8 x 863.6 x 1,727.2 mm	206 lbs	93 kg

The B&B Biggy pipe buggy allows one man to move up to 24 foot long pipe and up to 2,000 lbs / 910 kg of weight unassisted. The B&B Biggy pipe buggy ships unassembled in a wooden crate for ease of shipment and can be assembled in less than 15 minutes.

SPECIFICATIONS

- Transports pipe up to 24 foot
- 2,000 lbs / 910 kg lbs capacity
- Product dimension assembled: 12 feet in length x 35" width
- Carries up to 20" diameter pipe, fittings, boxes and more



PART NO.	DESCRIPTION	LOAD CAPACITY		DIMENSIONS (L x W x H)		PIPE CAPACITY	SHIPPING WEIGHT	
		2,000 lbs	910 kg	80 x 31 x 16"	508 x 787 x 406.4 mm		264.60 lbs	120.00 kg
2014	Biggy Pipe Buggy - upto 20" diameter pipe					up to 20" diameter pipe		



Supplied with flat free tires as standard

The B&B Baby pipe buggy is designed to help move pipe, fittings and other items with ease. Great for use in construction projects around the world, the B&B Baby pipe buggy ships in a cardboard box with 5 minute assembly of wheels and handle.

16" tires can move up to 1,000 lbs / 450 kg payload and up to 12" diameter pipe. The B&B Baby pipe buggy is shipped with a ratchet hold down strap.

SPECIFICATIONS

- Transports pipe up to 20 foot / 6,096 mm in length
- 1,000 lbs / 450 kg capacity
- Carries up to 12" diameter pipe, fittings, packages, and more
- Flat free tyres
- Ratchet hold down strap to secure pipe
- Quick disconnecting handle for easy storage



Secure buggy to pipe in the upside down position using the strap supplied



Use handle for leverage to flip buggy and pipe



Reposition handle to walk with pipe

PART NO.	DESCRIPTION	LOAD CAPACITY		DIMENSIONS (L x W x H)		PIPE CAPACITY	SHIPPING WEIGHT	
		1,000 lbs	450 kg	28 x 28 x 21"	711.2 x 711.2 x 533.4 mm		116.80 lbs	53.00 kg
2013	Baby pipe buggy					up to 12" diameter pipe		

B&B now offers a line of oxygen and acetylene carts also know as bottle carts. We offer two sizes, with and without firewall/lifting eye and with multiple wheel options. All bottle carts are powder coated green.

FEATURES

Two sizes available

- BCM series: holds a 9¼" tank and a 8½" tank
- BCL series: holds a 13" tank and a 9¼" tank

Three wheel options

- 14-inch rubber over steel rim
- 16-inch air filled tires
- 16-inch flat free tires
- Both sizes available with or without firewall/lifting eye
- Chain or bar type bottle holding options
- Tool tray is standard on all carts
- Custom colors available on volume orders

MEDIUM CART
PART NO. BCM-C14R - medium, no wall, chain with 14" rubber wheels

MEDIUM CART
PART NO. BCM-C16FF - medium, no wall, chain with 16" flat free wheels

MEDIUM CART
PART NO. BCM-B16P* - medium, no wall, bar with 16" pneumatic wheels
PART NO. BCM-B16FF - medium, no wall, bar with 16" flat free wheels

MEDIUM CART
PART NO. BCM-E14R medium, with wall and eye, 14" rubber wheels

MEDIUM CART
PART NO. BCM-E16FF medium, with wall and eye, 16" flat free wheels

LARGE CART
PART NO. BCL-E14R large, with wall and eye, bar with 14" rubber wheels

LARGE CART
PART NO. BCL-E16P* large, with wall and eye, with 16" pneumatic wheels
PART NO. BCL-E16FF large, with wall and eye, with 16" flat free wheels (as pictured here)

PART NO. BCL-E16FF

** Lifting eye carts comply with ASME B30.20, AWS D14.1 and AISC codes
 *** Fire-rated wall complies with OSHA 1926.350 & OSHA 1910.253

PART NO. SYSTEM

- First three letters denote size: BCM = Bottle Cart Medium / BCL = Bottle Cart Large
- Letter after the dash/hyphen denotes holder type: C = Chain holder / B = Bar holder / E = Eye-Wall
- Number denotes tire size: 8 inch / 14 inch / 16 inch
- Last letters denote tire type: R = Rubber over steel / P = Pneumatic / FF = Flat Free

1. Impressive capacity: lifts loads of up to 650 lbs / 295 kg, providing substantial support for various materials and equipment.
2. Versatile heights: offers three height options - 12' 11" (3.9 m), 18' 4" (5.6 m) and 23' 9" (7.2 m), accommodating a range of lifting needs.
3. Effortless assembly: tool-free setup with no loose hardware, ensuring quick and hassle-free deployment.
4. Secure transport: mast hold-down feature ensures the mast remains stable during transport, enhancing safety.
5. Reliable winch system: equipped with a highly reliable and robust single-speed winch for smooth lifting operations.
6. Easy maneuverability: standard steering handle and fast-action stabilizer legs facilitate easy movement and stabilization, even on rough terrain.
7. Convenient mobility: 10" / 254 mm rough terrain wheels and lockable 5" / 127 mm casters allow hassle-free loading onto trucks or vans, while roller wheels aid in smooth transport.
8. Hoisting capability: lifting eye enables effortless hoisting on and off vehicles, adding to its versatility and usability.

This heavy-duty Mega Lift combines strength, reliability, and convenience, making it ideal for various industrial and commercial applications.



PART NO.	STOWED HEIGHT	STOWED LENGTH	OPERATING HEIGHT	OPERATING LENGTH	BASE WIDTH	WIDTH WITH STABILIZER LEGS	GROUND CLEARANCE	LOAD HEIGHT	MAX. HEIGHT (FORKS DOWN)	MAX. HEIGHT (FORKS REVERSED)
ML-12	86.5" / 2,197 mm	36" / 914 mm	86.5" / 2,197 mm	85" / 2,159 mm	32.25" / 819.2 mm	71.5" / 1,816 mm	2.875" / 73.03 mm	4" / 101.6 mm	10' 11.625" / 3,344 mm	12' 11.375" / 3,945 mm
ML-18	86.5" / 2,197 mm	36" / 914 mm	86.5" / 2,197 mm	85" / 2,159 mm	32.25" / 819.2 mm	71.5" / 1,816 mm	2.875" / 73.03 mm	4" / 101.6 mm	16' 4.625" / 4,994 mm	18' 4.375" / 5,598 mm
ML-24	86.5" / 2,197 mm	36" / 914 mm	86.5" / 2,197 mm	85" / 2,159 mm	32.25" / 819.2 mm	71.5" / 1,816 mm	2.875" / 73.03 mm	4" / 101.6 mm	21' 9.625" / 6,645 mm	23' 9.375" / 7,249 mm



PIPE CRADLE

Multi purpose pipe cradles slide over forks and are easily locked in. Great for raising standard metal pipe and spiral ductwork.

PART NO. MLCRADLE



FORK EXTENSIONS

Forks extensions are extended and retracted with the push of a button. Max load capacity is 200 lbs whenever fork extensions are extended.

PART NO. MLFEXT



STEERING HANDLE

Our standard steering handle allows for easy maneuverability of the lift and aids in the installation of the lift in the back of vans and truck beds.

PART NO. MLSTH




**GLOBAL LEADER IN SPECIALIZED
MACHINING, WELDING AND
FABRICATION EQUIPMENT**



**SPECIALIZED FABRICATION EQUIPMENT
GROUP**

Contact Americas
sales@sfe-brands.com



Contact International
sales-int@sfe-brands.com



www.sfe-brands.com



Our group policy is one of continuous improvements and acquisitions. Products and data tables are subject to change and may vary from those illustrated. Copyright © 2025 Specialized Fabrication Equipment Group, All rights reserved.