

## Steel Wire Delivery Kit WDK-SDR-1 Parts List:

Part #	Description	Quantity of Kits with Selected Options Required:	Qty
FDD-MD	Drum Dolly for Wire Drums or Boxes up to 25" Use WWSD Skid Dolly (27.5" square) instead	No drum dolly needed	1
Select Option >>	Drum Hood with Direct Pull Kit - Select Drum Size/Type:		1
Select Option >>	Fire Resistant Drum Cover (OSHA requirement within 35 ft of arc) - Select Cover:		1
EC-TCD	Telescoping Conduit Quick Disconnect Kit (with crosslinked polymer conduit)		1
WGM-A5	Wire Wizard® Guide Module Insulated Disconnect		2
WGM-1	Wire Wizard® Guide Modules (45° sections)		3
WGM-ECK-50	Wire Wizard® Guide Module End Cap Kit (includes inlet & outlet ends)		2
Select Option >>	WGM-UAK Union Adapter Kit (if drum center is 12" or less from wall) WGM-EA-10 Extension Arm +2 ft of EC-4-R Conduit & 2 A-10HM Fittings		1
Select Option >>	Conduit Options:	Custom Length: FT	1
Enter Details >>	Feeder Inlet Connection Kit - Enter Feeder Make & Model Number:		1


### Optional Accessories

WWSB-M12-K	Wire Presence Sensor Block & 12mm PNP Proximity Switch (connects to PLC) - signals/stops cycle when drum is empty	
CM-F-3	WizardGear™ Cable Management Kit for Fanuc® 100/120ic Robots (kits can be developed for other robot models, contact us for details)	
DLG	Drum Level Gauge - shows wire level remaining in drum with sliding magnet	
WSS-100-K	Wire Straightener for Steel Wire up to 1/16" (1.6mm), for installation at the wire feeder - includes fittings & A-3 quick disconnect	
FDL###	Drum Lifter - Select Lifter:	Include Fork Lift Adapter
RCH###	Retractable Conduit Balancer for hanging conduit from ceiling - Select Balancer:	
EC-CUTTER	Polymer Conduit Cutter	
EC-DB	Countersink Tool for Polymer Conduit Installation	

## Wire Delivery Kit Configuration

**Kit # WDK-CDR-1**

For applications using up to .052  
(1.3mm) **cored or stainless steel**  
wire in fiber drum or  
box packaging

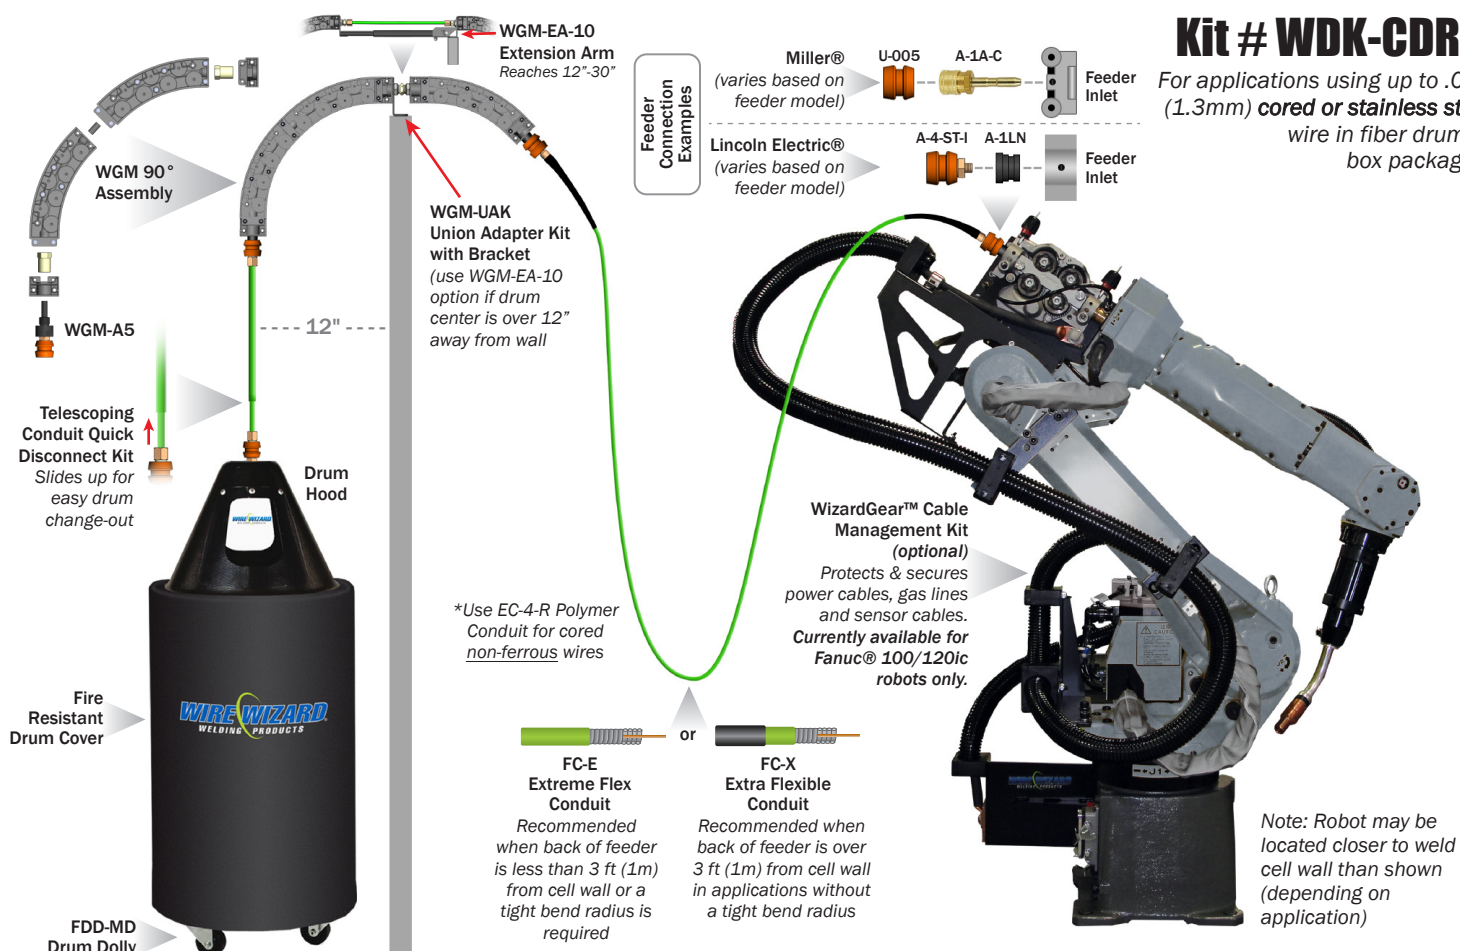


### Cored or Stainless Wire Delivery Kit WDK-CDR-1 Parts List:

Quantity of Kits with  
Selected Options Required:

Part #	Description	Qty
FDD-MD	Drum Dolly for Wire Drums or Boxes up to 25" Use WWSD Skid Dolly (27.5" square) instead No drum dolly needed	1
Select Option >>	Drum Hood with Direct Pull Kit - Select Drum Size/Type:	1
Select Option >>	Fire Resistant Drum Cover (OSHA requirement within 35 ft of arc) - Select Cover:	1
EC-TCD	Telescoping Conduit Quick Disconnect Kit (with crosslinked polymer conduit)	1
WGM-A5	Wire Wizard® Guide Module Insulated Disconnect	2
WGM-1-S	Wire Wizard® Guide Modules for Cored or Stainless Steel Wire (45° sections)	2
WGM-ECK-50	Wire Wizard® Guide Module End Cap Kit (includes inlet & outlet ends)	2
Select Option >>	WGM-UAK Union Adapter Kit (if center of drum is 12" or less) WGM-EA-10 Extension Arm +2 ft of EC-4-R Conduit & 2 A-10HM Fittings	1
Select Option >>	Conduit Options: Custom Length: FT	1
Enter Details >>	Feeder Inlet Connection Kit - Enter Feeder Make & Model Number:	1

## Optional Accessories

WWSB-M12-K	Wire Presence Sensor Block & 12mm PNP Proximity Switch (connects to PLC) - signals/stops cycle when drum is empty
CM-F-3	WizardGear™ Cable Management Kit for Fanuc® 100/120ic Robots ( <i>kits can be developed for other robot models, contact us for details</i> )
DLG	Drum Level Gauge - shows wire level remaining in drum with sliding magnet (for ferrous cored wires only)
WSS-100-K	Wire Straightener for Steel Wire up to 1/16" (1.6mm), for installation at the wire feeder - includes fittings & A-3 quick disconnect
FDL-###	Drum Lifter - Select Lifter: <span style="float: right;">Include Fork Lift Adapter</span>
RCH-###	Retractable Conduit Balancer for hanging conduit from ceiling - Select Balancer:
EC-CUTTER	Polymer Conduit Cutter
EC-DB	Countersink Tool for Polymer Conduit Installation

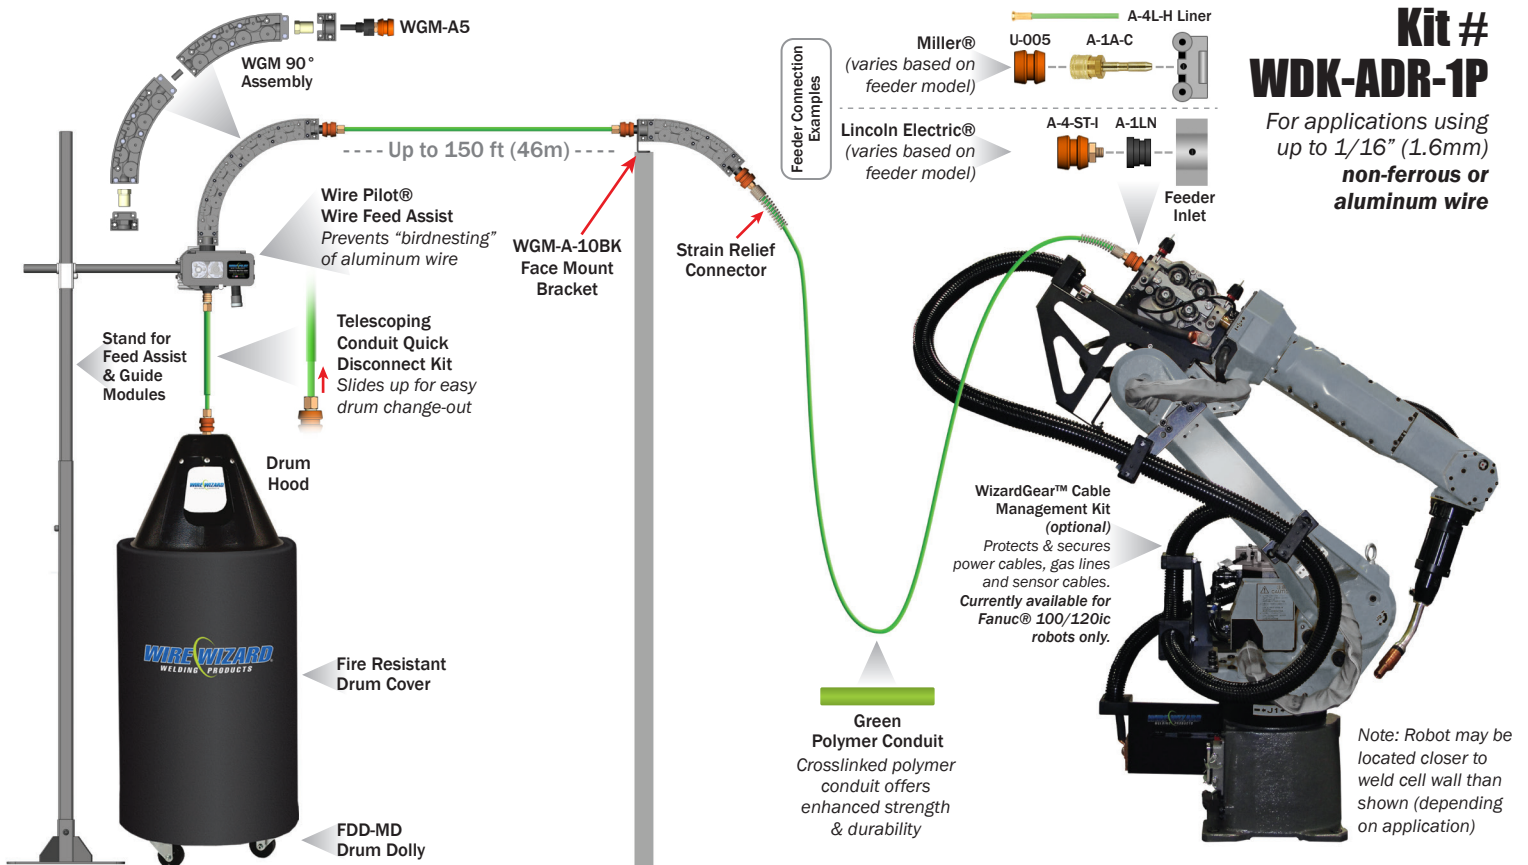

**Kit #**  
**WDK-ADR-1P**

For applications using  
up to 1/16" (1.6mm)  
**non-ferrous or  
aluminum wire**

## Non-ferrous/Aluminum Wire Delivery Kit WDK-ADR-1P Parts List:


Quantity of Kits with  
Selected Options Required:

Part #	Description	Qty
FDD-MD	Drum Dolly for Wire Drums or Boxes up to 25" Use WWSD Skid Dolly (27.5" square) instead	1
Select Option >>	Drum Hood with Direct Pull Kit - Select Drum Size/Type:	1
Select Option >>	Fire Resistant Drum Cover (OSHA requirement within 35 ft of arc) - Select Cover:	1
EC-TCD-A	Telescoping Conduit Quick Disconnect Kit for non-ferrous wires (with crosslinked polymer conduit)	1
WGM-PFA-STAND	Adjustable Stand for Feed Assist and Guide Modules - adjusts up to 86" (2.2m) high	1
PFA-LM-15	Wire Pilot® Feed Assist (includes filter/regulator, works with standard shop air) Wire Size for Drive Rolls:	1
WGM-PFA-AK-15	Wire Pilot® Feed Assist to Guide Module Adapter	1
WGM-A5	Wire Wizard® Guide Module Insulated Disconnect	3
WGM-1	Wire Wizard® Guide Modules (45° sections)	3
WGM-ECK-50	Wire Wizard® Guide Module End Cap Kit (includes inlet & outlet ends)	2
WGM-A-10BK	Face Mount Bracket Kit for Wire Wizard® Guide Modules	1
Select Option >>	Conduit - Inside Cell:	1
Select Option >>	Conduit - Outside Cell:	1
Enter Details >>	Feeder Inlet Connection Kit - Enter Feeder Make & Model Number:	1

### Optional Accessories

WWSB-M12-K	Wire Presence Sensor Block & 12mm PNP Proximity Switch (connects to PLC) - signals/stops cycle when drum is empty	
A-4L-H	Connector Liner to protect non-ferrous wires from touching steel connection points	Quantity Required:
CM-F-3	WizardGear™ Cable Management Kit for Fanuc® 100/120ic Robots (kits can be developed for other robot models, contact us for details)	
WSS-100-A-K	Wire Straightener for Non-ferrous Wire up to 1/16" (1.6mm), for installation at the wire feeder - includes fittings & A-3 quick disconnect	
FDL-###	Drum Lifter - Select Lifter:	Include Fork Lift Adapter
RCH-###	Retractable Conduit Balancer for hanging conduit from ceiling - Select Balancer:	
EC-CUTTER	Polymer Conduit Cutter	
EC-DB	Countersink Tool for Polymer Conduit Installation	



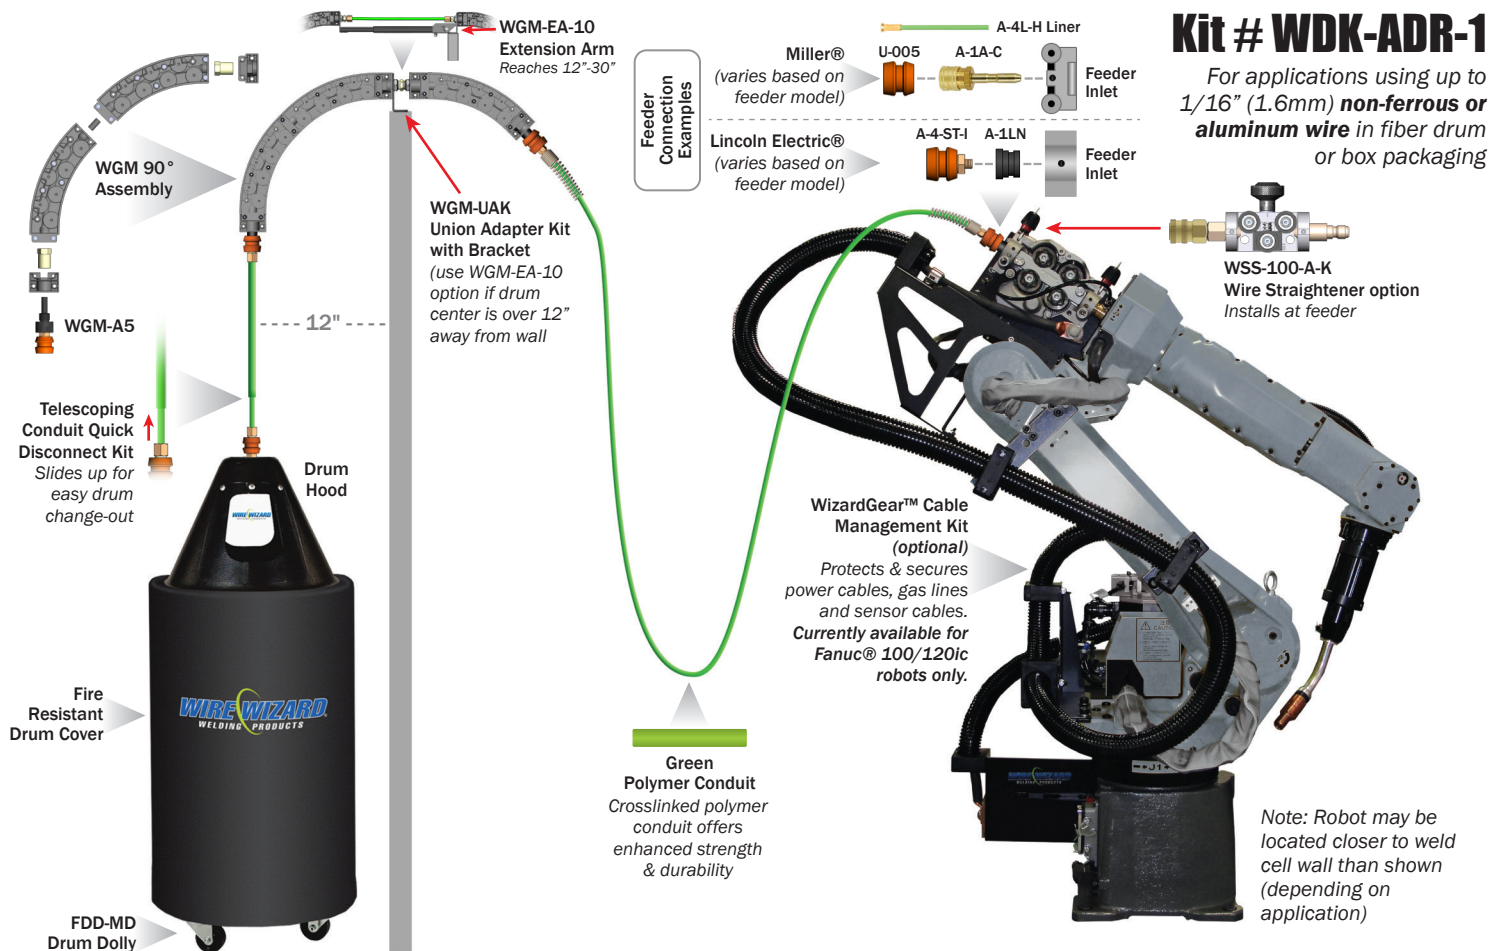

## Non-ferrous/Aluminum Wire Delivery Kit WDK-ADR-1 Parts List:

Quantity of Kits with  
Selected Options Required:


Part #	Description	Qty
FDD-MD	Drum Dolly for Wire Drums or Boxes up to 25" Use WWSD Skid Dolly (27.5" square) instead	1
Select Option >>	Drum Hood with Direct Pull Kit - Select Drum Size/Type:	1
Select Option >>	Fire Resistant Drum Cover (OSHA requirement within 35 ft of arc) - Select Cover:	1
EC-TCD-A	Telescoping Conduit Quick Disconnect Kit for non-ferrous wires (with crosslinked polymer conduit)	1
WGM-A5	Wire Wizard® Guide Module Insulated Disconnect	2
WGM-1	Wire Wizard® Guide Modules (45° sections)	3
WGM-ECK-50	Wire Wizard® Guide Module End Cap Kit (includes inlet & outlet ends)	2
Select Option >>	WGM-UAK Union Adapter Kit (if center of drum is 12" or less) WGM-EA-10 Extension Arm +2 ft of EC-4-R Conduit & 2 A-10HM Fittings	1
Select Option >>	Conduit Options:	1
Enter Details >>	Feeder Inlet Connection Kit - Enter Feeder Make & Model Number:	1

### Optional Accessories

WWSB-M12-K	Wire Presence Sensor Block & 12mm PNP Proximity Switch (connects to PLC) - signals/stops cycle when drum is empty	
A-4L-H	Connector Liner to protect non-ferrous wires from touching steel connection points	Quantity Required:
CM-F-3	WizardGear™ Cable Management Kit for Fanuc® 100/120ic Robots (kits can be developed for other robot models, contact us for details)	
WSS-100-A-K	Wire Straightener for Non-ferrous Wire up to 1/16" (1.6mm), for installation at the wire feeder - includes fittings & A-3 quick disconnect	
FDL-###	Drum Lifter - Select Lifter:	Include Fork Lift Adapter
RCH-###	Retractable Conduit Balancer for hanging conduit from ceiling - Select Balancer:	
EC-CUTTER	Polymer Conduit Cutter	
EC-DB	Countersink Tool for Polymer Conduit Installation	

## Kit # WDK-SDM-1

For applications using up to  
.052 (1.3mm) **steel wire** in  
fiber drum or box packaging

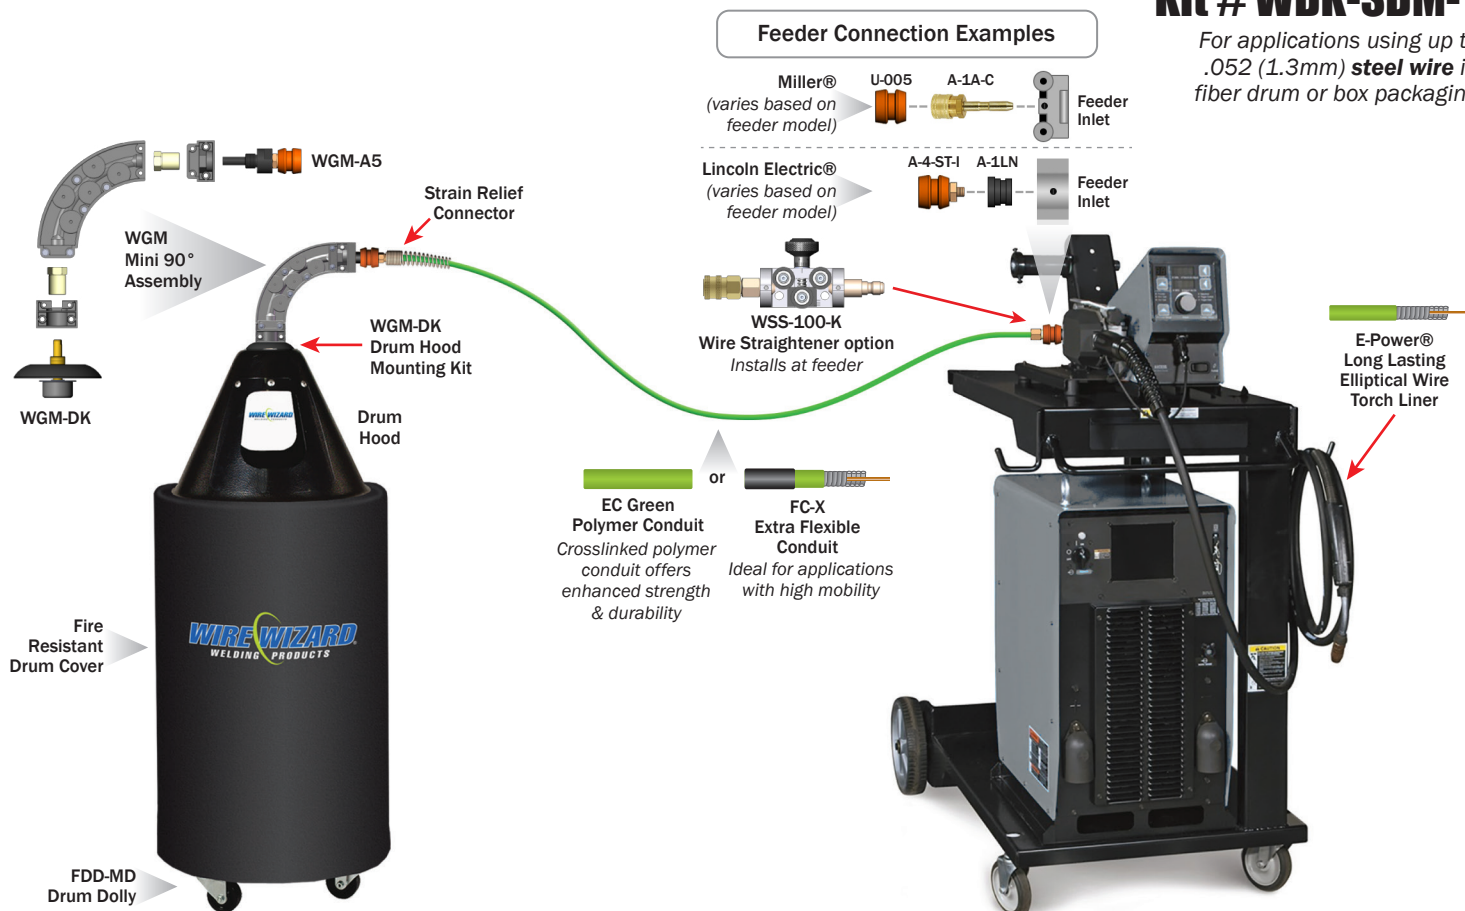

## Steel Wire Delivery Kit WDK-SDM-1 Parts List:

Quantity of Kits with  
Selected Options Required:


Part #	Description	Qty
FDD-MD	Drum Dolly for Wire Drums or Boxes up to 25" Use WWSD Skid Dolly (27.5" square) instead	1
Select Option >>	Drum Hood with Direct Pull Kit - Select Drum Size/Type:	1
Select Option >>	Fire Resistant Drum Cover (OSHA requirement within 35 ft of arc) - Select Cover:	1
WGM-DK	Wire Wizard® Guide Module Drum Hood Mounting Kit	1
WGM-M-1	Wire Wizard® 90° Mini Guide Module	1
WGM-A5	Wire Wizard® Guide Module Insulated Disconnect	1
WGM-ECK-50	Wire Wizard® Guide Module End Cap Kit (includes inlet & outlet ends)	1
Select Option >>	Conduit Options:	1
Enter Details >>	Feeder Inlet Connection Kit - Enter Feeder Make & Model Number:	1

### Optional Accessories

WTP-###	E-Power® Torch Liner - Torch Make & Model:	Wire Size:	Length:	Qty:
WSS-100-K	Wire Straightener for Steel Wire up to 1/16" (1.6mm), for installation at the wire feeder - includes fittings & A-3 quick disconnect			
FDL-###	Drum Lifter - Select Lifter:			Include Fork Lift Adapter
DLG	Drum Level Gauge - shows wire level remaining in drum with sliding magnet			
RCH-###	Retractable Conduit Balancer for hanging conduit from ceiling - Select Balancer:			
EC-CUTTER	Polymer Conduit Cutter			
EC-DB	Countersink Tool for Polymer Conduit Installation			

## Kit # WDK-CDM-1

For applications using up to .052 (1.3mm) **cored or stainless steel wire** in fiber drum or box packaging

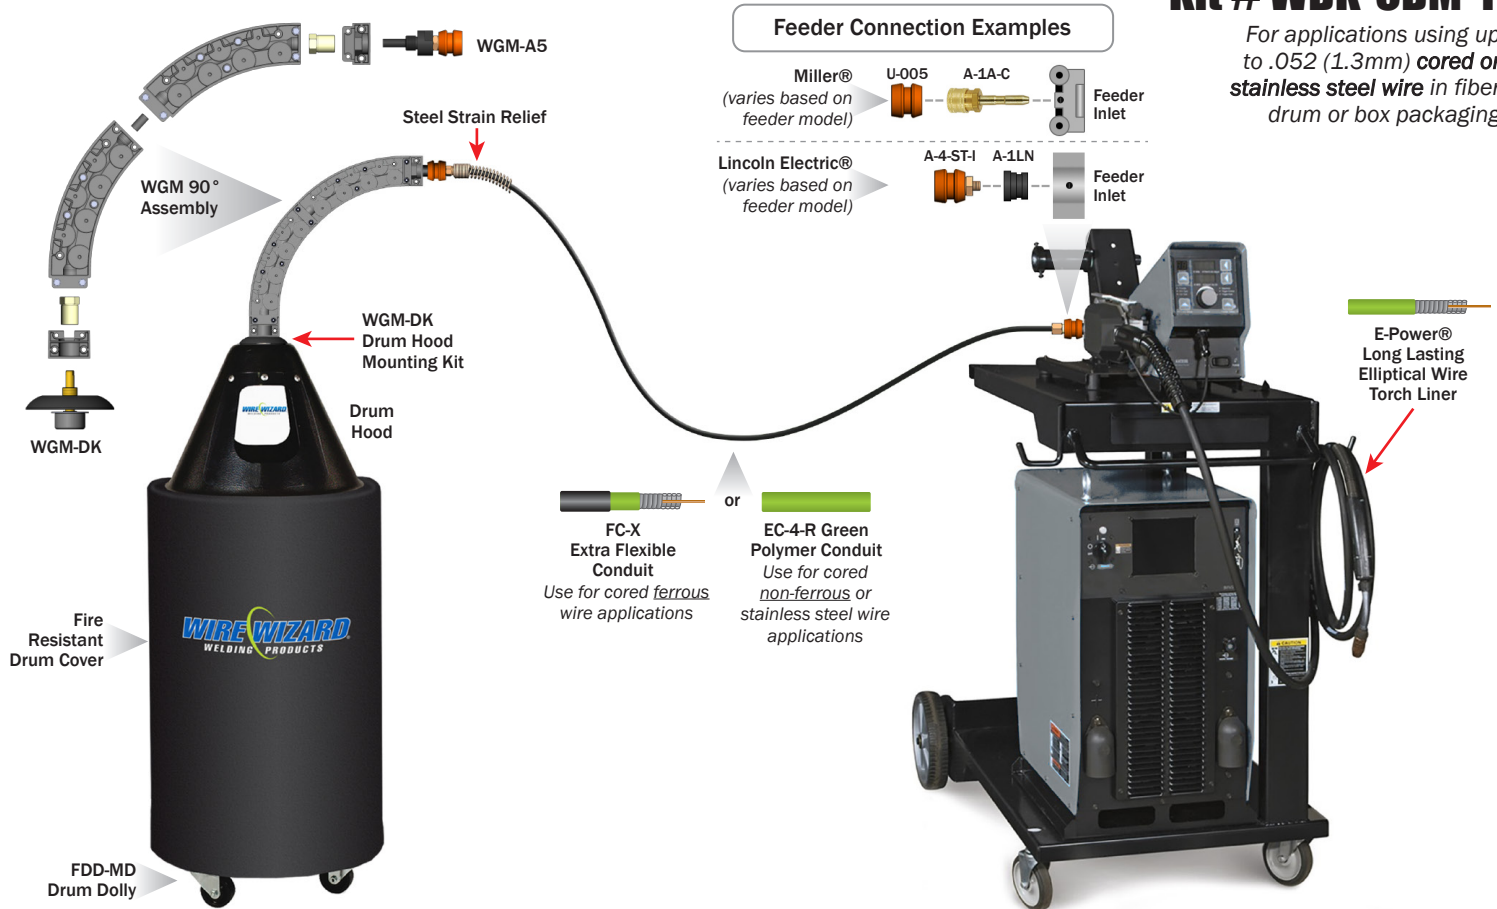

## Cored or Stainless Wire Delivery Kit WDK-CDM-1 Parts List:


Quantity of Kits with  
Selected Options Required:

Part #	Description	Qty
FDD-MD	Drum Dolly for Wire Drums or Boxes up to 25" Use WWSD Skid Dolly (27.5" square) instead	1
Select Option >>	Drum Hood with Direct Pull Kit - Select Drum Size/Type:	1
Select Option >>	Fire Resistant Drum Cover (OSHA requirement within 35 ft of arc) - Select Cover:	1
WGM-DK	Wire Wizard® Guide Module Drum Hood Mounting Kit	1
WGM-1-S	Wire Wizard® Guide Modules for Cored or Stainless Steel Wire (45° sections)	2
WGM-A5	Wire Wizard® Guide Module Insulated Disconnect	1
WGM-ECK-50	Wire Wizard® Guide Module End Cap Kit (includes inlet & outlet ends)	1
Select Option >>	Conduit Options:	1
Enter Details >>	Feeder Inlet Connection Kit - Enter Feeder Make & Model Number:	1

### Optional Accessories

WTP-###	E-Power® Torch Liner - Torch Make & Model:	Wire Size:	Length:	Qty:
WSS-100-K	Wire Straightener for Steel Wire up to 1/16" (1.6mm), for installation at the wire feeder - includes fittings & A-3 quick disconnect			
FDL-###	Drum Lifter - Select Lifter:			Include Fork Lift Adapter
DLG	Drum Level Gauge - shows wire level remaining in drum with sliding magnet (for ferrous cored wires only)			
RCH-###	Retractable Conduit Balancer for hanging conduit from ceiling - Select Balancer:			
EC-CUTTER	Polymer Conduit Cutter			
EC-DB	Countersink Tool for Polymer Conduit Installation			



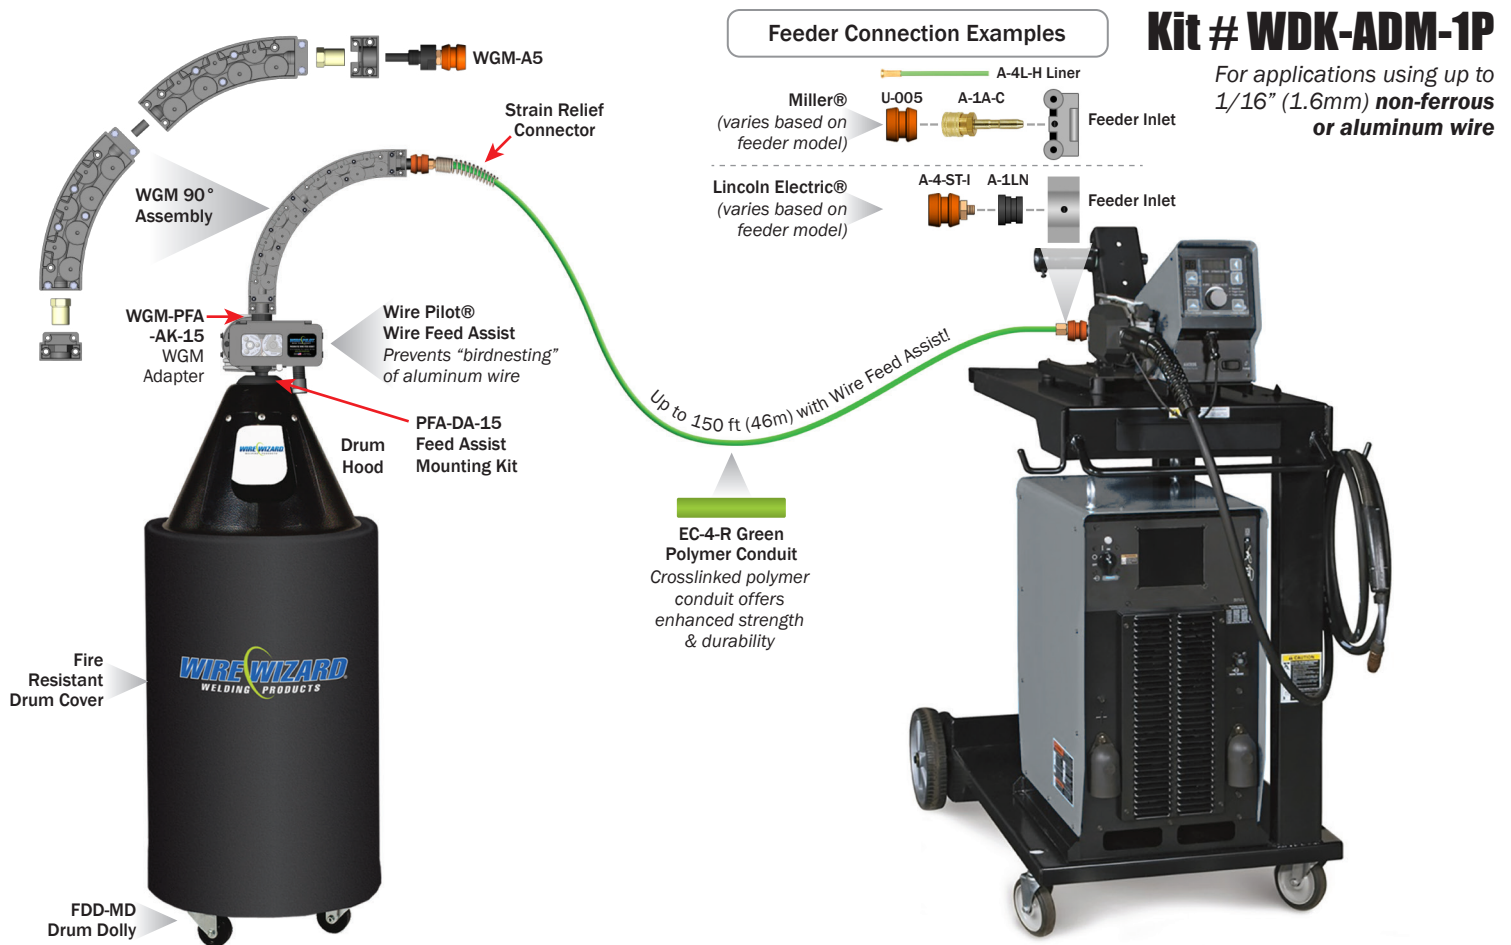

## Non-ferrous/Aluminum Wire Delivery Kit WDK-ADM-1P Parts List:

Quantity of Kits with  
Selected Options Required:

Part #	Description	Qty
FDD-MD	Drum Dolly for Wire Drums or Boxes up to 25" Use WWSD Skid Dolly (27.5" square) instead	1
Select Option >>	Drum Hood - Select Drum Size/Type:	1
Select Option >>	Fire Resistant Drum Cover (OSHA requirement within 35 ft of arc) - Select Cover:	1
PFA-LM-15	Wire Pilot® Feed Assist (includes filter/regulator, works with standard shop air) Wire Size for Drive Rolls:	1
PFA-DA-15	Wire Pilot® Feed Assist Drum Adapter Kit	1
WGM-PFA-AK-15	Wire Pilot® Feed Assist to Guide Module Adapter	1
WGM-1	Wire Wizard® Guide Modules (45° sections)	2
WGM-A5	Wire Wizard® Guide Module Insulated Disconnect	1
WGM-ECK-50	Wire Wizard® Guide Module End Cap Kit (includes inlet & outlet ends)	1
Select Option >>	Conduit Options: Custom Length: FT	1
Enter Details >>	Feeder Inlet Connection Kit - Enter Feeder Make & Model Number:	1


### Optional Accessories

A-4L-H	Connector Liner to protect non-ferrous wires from touching steel connection points	Quantity Required:
WSS-100-A-K	Wire Straightener for Non-ferrous Wire up to 1/16" (1.6mm), for installation at the wire feeder - includes fittings & A-3 quick disconnect	
FDL-###	Drum Lifter - Select Lifter:	Include Fork Lift Adapter
RCH-###	Retractable Conduit Balancer for hanging conduit from ceiling - Select Balancer:	
EC-CUTTER	Polymer Conduit Cutter	
EC-DB	Countersink Tool for Polymer Conduit Installation	

## Wire Delivery Kit Configuration

# Kit # WDK-ADM-1

For applications using up to  
1/16" (1.6mm) **non-ferrous or  
aluminum wire** in fiber drum  
or box packaging

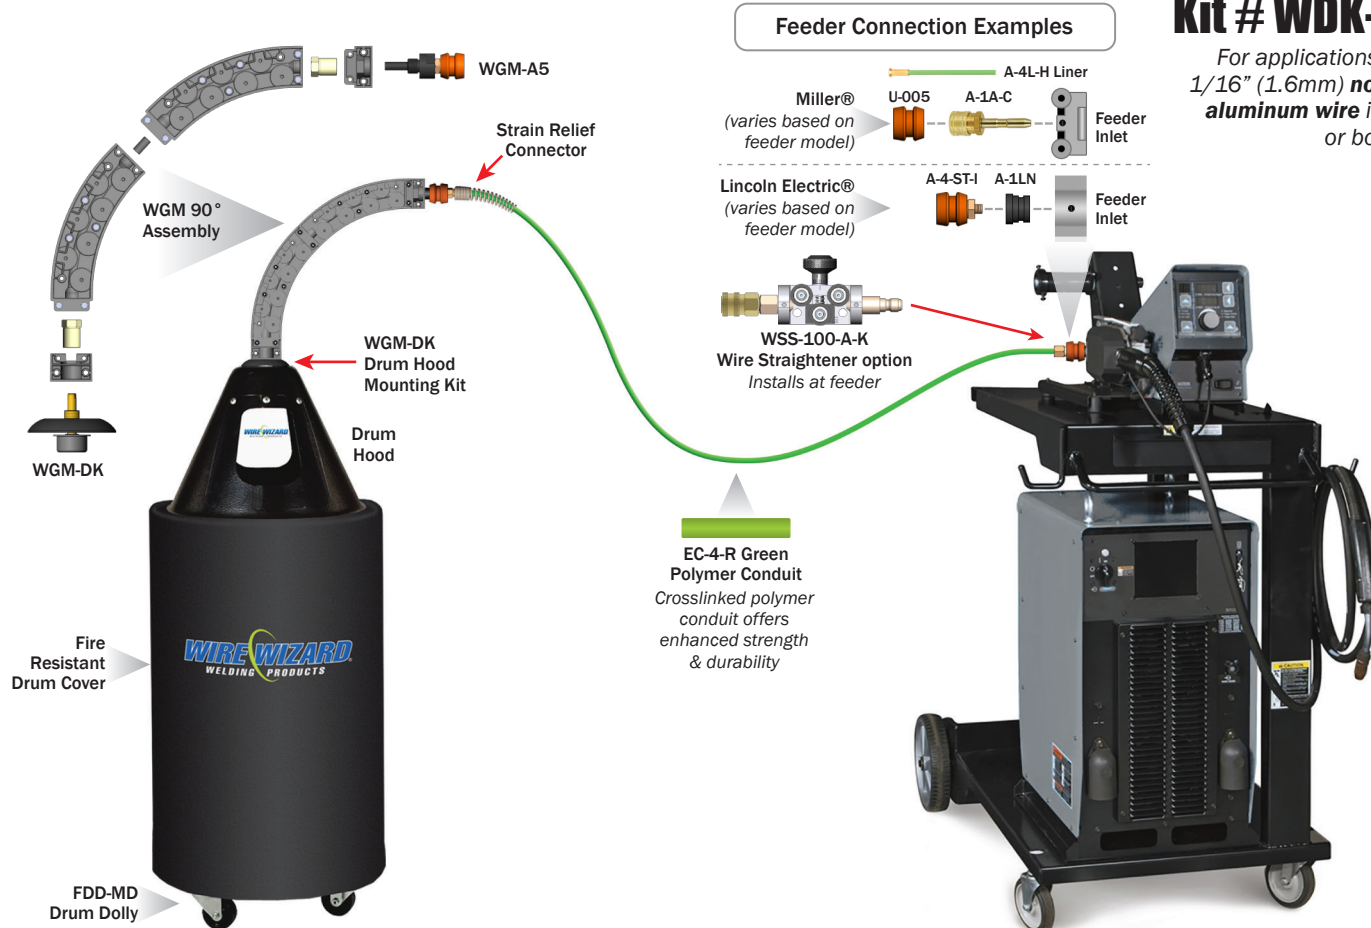

### Non-ferrous/Aluminum Wire Delivery Kit WDK-ADM-1 Parts List:

Quantity of Kits with  
Selected Options Required:

Part #	Description	Qty
FDD-MD	Drum Dolly for Wire Drums or Boxes up to 25" Use WWSD Skid Dolly (27.5" square) instead No drum dolly needed	1
Select Option >>	Drum Hood with Direct Pull Kit - Select Drum Size/Type:	1
Select Option >>	Fire Resistant Drum Cover (OSHA requirement within 35 ft of arc) - Select Cover:	1
WGM-DK	Wire Wizard® Guide Module Drum Hood Mounting Kit	1
WGM-1	Wire Wizard® Guide Modules (45° sections)	2
WGM-A5	Wire Wizard® Guide Module Insulated Disconnect	1
WGM-ECK-50	Wire Wizard® Guide Module End Cap Kit (includes inlet & outlet ends)	1
Select Option >>	Conduit Options: Custom Length: FT	1
Enter Details >>	Feeder Inlet Connection Kit - Enter Feeder Make & Model Number:	1

## Optional Accessories

A-4L-H	Connector Liner to protect non-ferrous wires from touching steel connection points	Quantity Required:
WSS-100-A-K	Wire Straightener for Non-ferrous Wire up to 1/16" (1.6mm), for installation at the wire feeder - includes fittings & A-3 quick disconnect	
FDL-###	Drum Lifter - Select Lifter:	Include Fork Lift Adapter
RCH-###	Retractable Conduit Balancer for hanging conduit from ceiling - Select Balancer:	
EC-CUTTER	Polymer Conduit Cutter	
EC-DB	Countersink Tool for Polymer Conduit Installation	