

Dual Purpose insulated shipping containers.

Built for temperature sensitive freight.

Prepared for local conversion.



FREIGHT

Same performance as a NOR with more cargo capacity.

Designed and built to ISO Thermal Container standards at our partner factory in China (and fully CSC certified).

Suitable for most dry cargo but ideal for temperature sensitive products (pharma, electronics, etc.) where controlled refrigeration is not required - but protection from extreme hot and cold conditions during transit is preferred (to maintain quality and lifetime of goods).

Can significantly reduce disposable insulation packaging and therefore increase contents per TEU (lowering costs).

Ideal for One-Trip and One-Way freight leasing models.



CONVERSION

Commercial resell at local destinations worldwide.

High performance pre-insulated container provides ideal building envelope for accelerated conversion.

Uniquely framed with universal 41mm x 21mm shallow Strut Channel form recessed within internal side walls (patent-pending), providing more useable space than dry corrugated containers with common aftermarket insulation (saving time and money for convertors).

Perfect for Self-Storage, Workshops, Plant Rooms, Site Offices, Event Spaces, Accommodation Units and more.


Flexible out-fitting using bolt and Zebedee spring nuts.



CLASSIFICATION		8ft Mini	10ft Standard	20ft Standard	20ft Tunnel	40ft HC Standard	40ft HC Tunnel
EXTERNAL DIMENSIONS	LENGTH (mm)	2,200	2,991	6,058	6,058	12,192	12,192
	WIDTH (mm)	2,438	2,438	2,438	2,438	2,438	2,438
	HEIGHT (mm)	2,260	2,591	2,591	2,591	2,896	2,896
INTERNAL DIMENSIONS	LENGTH (mm)	1,996	2,787	5,854	5,792	11,988	11,927
	WIDTH (mm)	2,294	2,294	2,294	2,294	2,294	2,294
	HEIGHT (mm)	1,948	2,279	2,279	2,279	2,584	2,567
DOOR OPENING	WIDTH (mm)	2,294	2,294	2,294	2,294	2,294	2,294
	HEIGHT (mm)	1,900	2,231	2,231	2,231	2,536	2,519
CARGO ACCESS HEIGHT (mm)		2,227	2,227	2,227	2,227	2,532	2,515
INTERNAL CUBIC CAPACITY (cu.m)		11.7	14.6	30.6	30.3	71.1	70.2
MAX. GROSS WEIGHT (kg)		6,000	10,160	30,480	30,480	34,000	34,000
TARE WEIGHT (kg)		1,700	2,200	2,700	2,700	4,500	4,500
MAX. PAYLOAD (kg)		4,300	7,960	27,780	27,780	29,500	29,500
800mm x 1,200mm pallet capacity		NA	5	11	11	24*	24*
1,000mm x 1,200mm pallet capacity		NA	4	10	10	21	21

Insulated shipping containers (without reefer machinery) have similar pallet capacity as Dry containers except *

(*Standard Dry 40ft containers can hold up to 25 Euro Pallets)

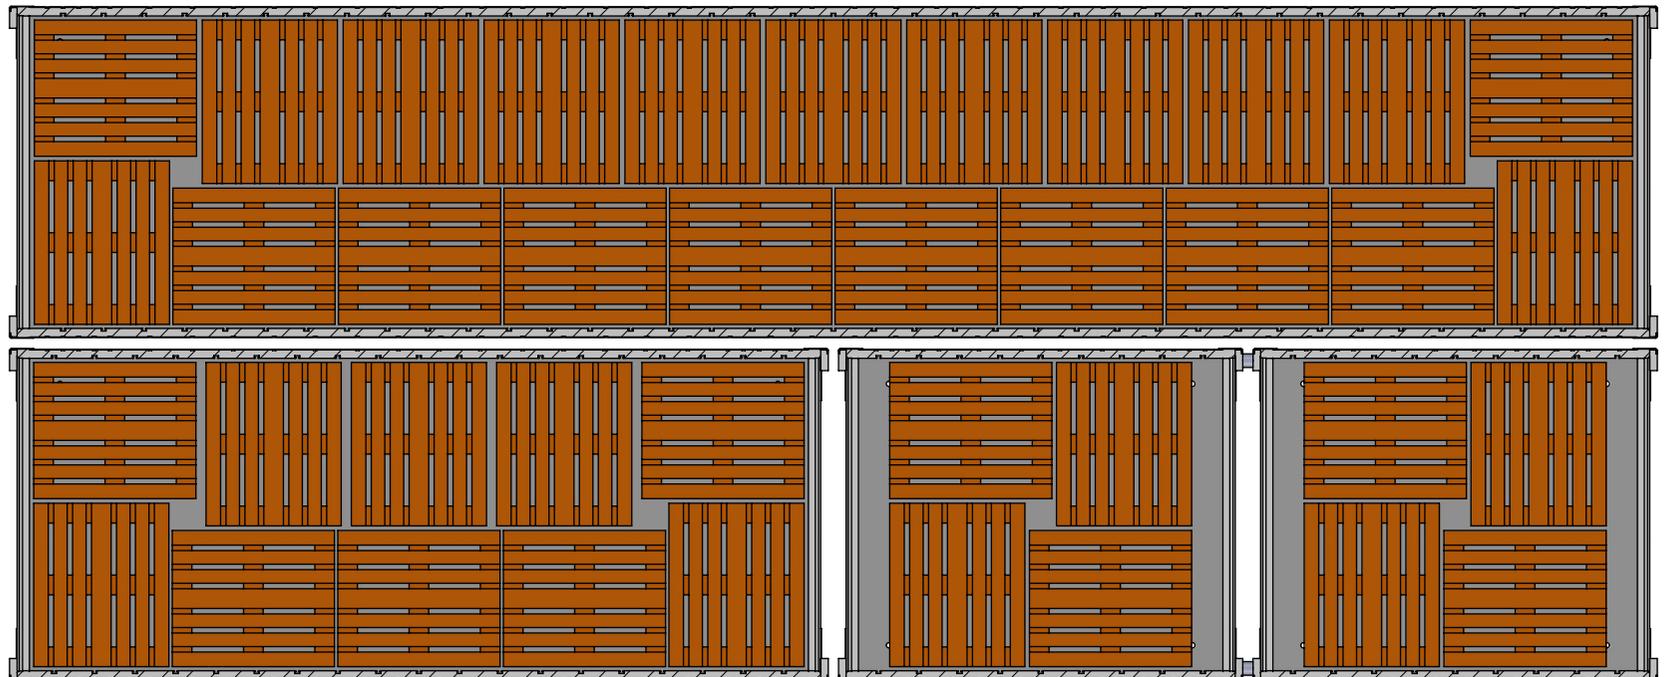

Two 10ft containers can be joined and transported as 20ft

8ft Mini containers can be stacked inside 10ft, 20ft, 40ft



The image shows the interior of a storage container. The walls are made of corrugated metal, and the floor is made of wooden planks. At the far end, there are two doors. The lighting is somewhat dim, creating a sense of depth and perspective.

CONTACT

www.ConversionContainers.com

Niall@ConversionContainers.com

+44 7885518993