
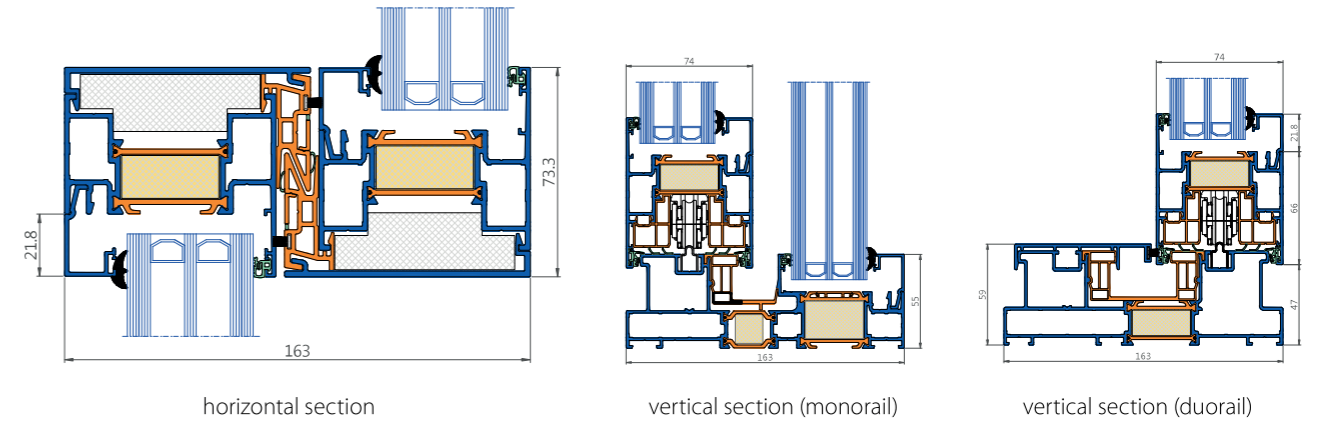


DECALU163 SLIDE

Modular windows with exceptional thermal performance

The Decalu163 slide is only available as a lift and slide. This system supports both monorail and duorail. It is possible to glaze the windows both on the inside and on the outside, which greatly increases the efficiency of installation. The minimalist mullion guarantees a modern appearance. This sliding window can support up to 400 kg of glass.

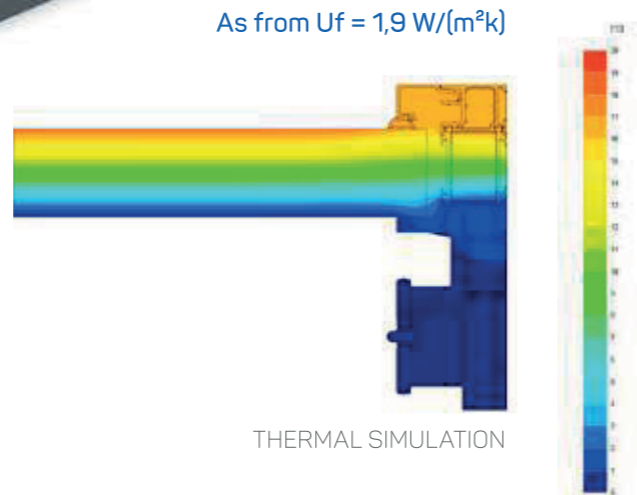

Technical performance		Decalu163 Slide
TEST	GLAZING	VALUE (SASH + FRAME)
EN ISO 10077-2		As from $U_f = 1.9 \text{ W/(m}^2\text{k)}$
EN ISO 10077-1	Double glazing	$U_g = 1.1 \text{ W/m}^2\text{K}$ $U_g = 1.0 \text{ W/m}^2\text{K}$
	Triple glazing	$U_g = 0.6 \text{ W/m}^2\text{K}$ $U_g = 0.4 \text{ W/m}^2\text{K}$
Air permeability	NBN EN 12207	class 3
Watertightness	NBN EN 12208	class 9A
Wind resistance	NBN EN 12210	class C2
Operating forces	NBN EN 13115	n/a
Incorrect use	NBN EN 13115	n/a

Technical characteristics	Decalu163 Slide
Frame installation depth	16.3mm
Sash installation depth	74mm
Hardware	Siegenia
Rebate height:	25mm
Glazing bead height	23mm
Possible glass thickness:	27-58mm
Internal visible height of the frame	55mm
External visible height of the frame	55mm
External visible height of the cross beam	70mm
Exterior	flush-mounted possible
Interior	flush-mounted possible
Glazing rubbers	EPDM
Alloy	EN AW 6060 TW66
Thermal break	Abs 49mm

(*) U-Value calculated on the basis of a sliding window measuring 4000 x 3000mm (BxH)