

GENERAL INFORMATION

This Chart Supplement is a Civil Flight Information Publication updated every eight weeks by the U.S. Department of Transportation, Federal Aviation Administration, Aeronautical Information Services, <http://www.faa.gov/go/ais>. It is designed for use with Aeronautical Charts covering the conterminous United States, Puerto Rico and the Virgin Islands.

The Airport/Facility Directory section contains all public-use airports, seaplane bases and heliports, military facilities, and selected private use facilities specifically requested by the Department of Defense (DoD) for which a DoD Instrument Approach Procedure has been published in the U.S. Terminal Procedures Publication. Additionally, this publication contains communications data, navigational facilities and certain special notices and procedures.

Military data contained within this publication is provided by the National Geospatial-Intelligence Agency and is intended to provide reference data for military and/or joint use airports. Not all military data contained in this publication is applicable to civil users.

CORRECTIONS, COMMENTS, AND/OR PROCUREMENT

CRITICAL information such as equipment malfunction, abnormal field conditions, hazards to flight, etc., should be reported as soon as possible.

FOR COMMENTS OR CORRECTIONS: https://www.faa.gov/air_traffic/flight_info/aeronav/aero_data/

FAA, Aeronautical Information Services
1305 East West Highway
SSMC-4 Suite 4400
Silver Spring, MD 20910-3281
Telephone 1-800-638-8972

NOTICE: Changes must be received by Aeronautical Information Services as soon as possible but not later than the "cut-off" dates listed below to assure publication on the desired effective date. Information cut-off dates that fall on a federal holiday must be received the previous work day.

Effective Date	Airport Information Cut-off date	Airspace Information* Cut-off date
5 Nov 20	23 Sep 20	8 Sep 20
31 Dec 20	18 Nov 20	3 Nov 20
25 Feb 21	13 Jan 21	29 Dec 20
22 Apr 21	10 Mar 21	23 Feb 21
17 Jun 21	5 May 21	20 Apr 21
12 Aug 21	30 Jun 21	15 Jun 21

*Airspace Information includes changes to preferred routes and graphic depictions on charts.

FOR PROCUREMENT:

For digital products, visit our website at:
http://www.faa.gov/air_traffic/flight_info/aeronav/digital_products/

For a list of approved FAA Print Providers, visit our website at:
http://www.faa.gov/air_traffic/flight_info/aeronav/print_providers/

THIS PUBLICATION COMPRISES PART OF THE FOLLOWING SECTIONS OF THE UNITED STATES AERONAUTICAL INFORMATION PUBLICATION (AIP): GEN, ENR AND AD.

TABLE OF CONTENTS

GENERAL INFORMATION Inside Front Cover

City/Military Airport Cross Reference 2

Seaplane Landing Areas 3

Abbreviations 4

SECTION 1: AIRPORT/FACILITY DIRECTORY LEGEND 12

SECTION 2: AIRPORT/FACILITY DIRECTORY

Arkansas 30

Louisiana 80

Mississippi 124

Oklahoma 166

Texas 232

SECTION 3: NOTICES

Aeronautical Chart Bulletins 425

Special Notices 435

Regulatory Notices 443

SECTION 4: ASSOCIATED DATA

FAA Telephone Numbers and National Weather Service 445

NWS Upper Air Observing Stations 450

Air Route Traffic Control Centers 451

Flight Service Station Communication Frequencies 456

VOR Receiver Checkpoints and VOR Test Facilities 459

Parachute Jumping Areas 464

Supplemental Communication Reference 468

Preferred IFR Routes 474

Q-Routes 491

Tower Enroute Control 509

Minimum Operational Network (MON) Airport Listing 511

SECTION 5: AIRPORT DIAGRAMS

Airport Diagrams Legend 512

Airport Hot Spots 514

Airport Diagrams 518

PIREP Form 632

GENERAL INFORMATION

CITY/MILITARY AIRPORT CROSS REFERENCE

Military airports are listed alphabetically by state and official airport name. The following city/military airport cross-reference listing provides alphabetical listing by state and city name for all military airport published in this directory.

STATE	CITY NAME	AIRPORT NAME
AR	JACKSONVILLE	LITTLE ROCK AFB
LA	BOSSIER CITY.....	BARKSDALE AFB
LA	FORT POLK	POLK AAF
LA	NEW ORLEANS.....	NEW ORLEANS NAS JRB (ALVIN CALLENDER FLD)
MS	BILOXI	KEESLER AFB
MS	COLUMBUS	COLUMBUS AFB
MS	MERIDIAN	JOE WILLIAMS NOLF
MS	MERIDIAN	MERIDIAN NAS (MC CAIN FLD)
OK	ALTUS.....	ALTUS AFB
OK	ENID	VANCE AFB
OK	FORT SILL	HENRY POST AAF (FORT SILL)
OK	LEXINGTON	MULDROW AHP
OK	OKLAHOMA CITY	TINKER AFB
TX	ABILENE	DYESS AFB
TX	BERCLAIR	GOLIAD NOLF
TX	CORPUS CHRISTI.....	CABANISS FLD NOLF
TX	CORPUS CHRISTI.....	CORPUS CHRISTI NAS (TRUAX FLD)
TX	CORPUS CHRISTI.....	WALDRON FLD NOLF
TX	DEL RIO	LAUGHLIN AFB
TX	FORT BLISS (EL PASO)	BIGGS AAF (FORT BLISS)
TX	FORT HOOD (KILLEEN)	HOOD AAF
TX	FORT HOOD (KILLEEN)	ROBERT GRAY AAF
TX	FORT WORTH.....	FORT WORTH NAS JRB (CARSWELL FLD)
TX	KINGSVILLE.....	KINGSVILLE NAS
TX	ORANGE GROVE.....	ORANGE GROVE NOLF
TX	SAN ANTONIO	KELLY FLD
TX	UNIVERSAL CITY	RANDOLPH AFB
TX	WICHITA FALLS	SHEPPARD AFB/WICHITA FALLS MUNI

SEAPLANE LANDING AREAS

The following locations have Seaplane Landing Areas (Waterways). See alphabetical listing for complete data on these facilities.

STATE	CITY NAME	FACILITY NAME
LA	NEW IBERIA.....	ACADIANA RGNL
LA	PATTERSON.....	HARRY P. WILLIAMS MEM
LA	PINEVILLE.....	PINEVILLE MUNI
OK	AFTON.....	CHEROKEE
TX	FRANKSTON.....	AERO ESTATES
TX	HOUSTON.....	DAVID WAYNE HOOKS MEM

GENERAL INFORMATION

ABBREVIATIONS

The following abbreviations/acronyms are those commonly used within this Directory. Other abbreviations/acronyms may be found in the Legend and are not duplicated below. The abbreviations presented are intended to represent grammatical variations of the basic form. (Example—"req" may mean "request", "requesting", "requested", or "requests").

For additional FAA approved abbreviations/acronyms please see FAA Order JO 7340.2 —Contractions

Abbreviation	Description	Abbreviation	Description
A/G	air/ground	AM	Amplitude Modulation, midnight til noon
AAF	Army Air Field	AMC	Air Mobility Command
AAS	Airport Advisory Service	amdt	amendment
AB	Airbase	AMSL	Above Mean Sea Level
abm	abeam	ANGS	Air National Guard Station
ABn	Aerodrome Beacon	ant	antenna
abv	above	AOE	Airport/Aerodrome of Entry
ACC	Air Combat Command Area Control Center	AP	Area Planning
acft	aircraft	APAPI	Abbreviated Precision Approach Path Indicator
ACLS	Automatic Carrier Landing System	apch	approach
act	activity	apn	apron
ACWS	Aircraft Control and Warning Squadron	APP	Approach Control
ADA	Advisory Area	Apr	April
ADCC	Air Defense Control Center	aprx	approximate
ADCUS	Advise Customs	APU	Auxiliary Power Unit
addn	addition	apv, apvl	approve, approval
ADF	Automatic Direction Finder	ARB	Air Reserve Base
adj	adjacent	ARCAL (CANADA)	Aircraft Radio Control of Aerodrome Lighting
admin	administration	ARFF	Aircraft Rescue and Fire Fighting
ADR	Advisory Route	ARINC	Aeronautical Radio Inc
advs	advise	arrg	arrange
advsy	advisory	arpt	airport
AEIS	Aeronautical Enroute Information Service	arr	arrive
AER	approach end rwy	ARS	Air Reserve Station
AFA	Army Flight Activity	ARSA	Airport Radar Service Area
AFB	Air Force Base	ARSR	Air Route Surveillance Radar
afct	affect	ARTCC	Air Route Traffic Control Center
AFFF	Aqueous Film Forming Foam	AS	Air Station
AFHP	Air Force Heliport	ASAP	as soon as possible
AFIS	Automatic Flight Information Service	ASDA	Accelerate–Stop Distance Available
afd	airfield	ASDE	Airport Surface Detection
AFOD	Army Flight Operations Detachment	ASDE–X	Airport Surface Detection Equipment–Model X
AFR	Air Force Regulation	asgn	assign
AFRC	Armed Forces Reserve Center/Air Force Reserve Command	ASL	Above Sea Level
AFRS	American Forces Radio Stations	ASOS	Automated Surface Observing System
AFS	Air Force Station	ASR	Airport Surveillance Radar
AFTN	Aeronautical Fixed Telecommunication Network	ASSC	Airport Surface Surveillance Capability
AG	Agriculture	ASU	Aircraft Starting Unit
A–G, A–GEAR	Arresting Gear	ATA	Actual Time of Arrival
agcy	Agency	ATC	Air Traffic Control
AGL	above ground level	ATCC	Air Traffic Control Center
AHP	Army heliport	ATCT	Airport Traffic Control Tower
AID	Airport Information Desk	ATD	Actual Time of Departure Along Track Distance
AIS	Aeronautical Information Services	ATIS	Automatic Terminal Information Service
AL	Approach and Landing Chart	ATS	Air Traffic Service
ALF	Auxiliary Landing Field	attn	attention
ALS	Approach Light System	Aug	August
ALSF–1	High Intensity ALS Category I configuration with sequenced Flashers (code)	auth	authority
ALSF–2	High Intensity ALS Category II configuration with sequenced Flashers (code)	auto	automatic
alt	altitude	AUW	All Up Weight (gross weight)
altn	alternate	aux	auxiliary
		AVASI	abbreviated VASI
		avbl	available
		AvGas	Aviation gasoline
		avn	aviation

Abbreviation.....	Description
AvOil	aviation oil
AWOS.....	Automatic Weather Observing System
AWSS.....	Automated Weather Sensor System
awt	await
awy	airway
az	azimuth
BA	braking action
BASH	Bird Aircraft Strike Hazard
BC	back course
bcn	beacon
bcst.....	broadcast
bdry	boundary
bidg.....	building
blkd.....	blocked
blo, blw	below
BOQ	Bachelor Officers Quarters
brg	bearing
btn	between
bus.....	business
byd	beyond
C.....	Commercial Circuit (Telephone)
CAC.....	Centralized Approach Control
cap.....	capacity
cat	category
CAT	Clear Air Turbulence
CCW or cntclkws.....	counterclockwise
ceil.....	ceiling
CERAP	Center Radar Approach Control
CG	Coast Guard
CGAF.....	Coast Guard Air Facility
CGAS	Coast Guard Air Station
CH, chan	channel
CHAPI	Chase Helicopter Approach Path Indicator
chg.....	change
cht	chart
cir	circle, circling
CIV, civ	Civil, civil, civilian
ck	check
CL	Centerline Lighting System
cl	class
clnc.....	clearance
clsd.....	closed
CNATRA	Chief of Naval Air Training
cnl	cancel
cntr	center
cntrln.....	centerline
Co	Company, County
CO	Commanding Officer
com.....	communication
comd.....	command
Comdr.....	Commander
coml.....	commercial
compul	compulsory
comsn	commission
conc.....	concrete
cond.....	condition
const.....	construction
cont.....	continue
CONUS.....	Continental United States
convl	conventional
coord	coordinate
copter.....	helicopter
corr	correct

Abbreviation.....	Description
CPDLC	Controller Pilot Data Link Communication
crdr.....	corridor
croS.....	cross
CRP	Compulsory Reporting Point
crs	course
CS	call sign
CSTMS.....	Customs
CTA.....	Control Area
CTAF.....	Common Traffic Advisory Frequency
ctc.....	contact
ctl	control
CTLZ.....	Control Zone
CVFR.....	Controlled Visual Flight Rules Areas
CW	Clockwise, Continuous Wave, Carrier Wave
dalgt	daylight
D-ATIS.....	Digital Automatic Terminal Information Service
daylt	daylight
db.....	decibel
DCL.....	Departure Clearance
Dec.....	December
decom.....	decommission
deg	degree
del.....	delivery
dep.....	depart
DEP	Departure Control
destn.....	destination
det.....	detachment
DF	Direction Finder
DH.....	Decision Height
DIAP.....	DoD Instrument Approach Procedure
direc.....	directional
disem.....	disseminate
displ.....	displace
dist.....	district, distance
div.....	division
DL.....	Direct Line to FSS
dit.....	delete
dly.....	daily
DME.....	Distance Measuring Equipment (UHF standard, TACAN compatible)
DNVT.....	Digital Non-Secure Voice Telephone
DoD.....	Department of Defense
drct.....	direct
DSN.....	Defense Switching Network (Telephone)
DSN.....	Defense Switching Network
dsplcd.....	displaced
DT	Daylight Savings Time
dur.....	during
durn.....	duration
DV.....	Distinguished Visitor
E	East
ea.....	each
EAT.....	Expected Approach Time
ECN.....	Enroute Change Notice
eff.....	effective, effect
E-HA.....	Enroute High Altitude
E-LA.....	Enroute Low Altitude
elev.....	elevation
ELT.....	Emergency Locator Transmitter

Abbreviation	Description	Abbreviation	Description
EMAS	Engineered Material Arresting System	GAT	General Air Traffic (Europe-Asia)
emerg	emergency	GCA	Ground Control Approach
eng	engine	GCO	Ground Communication Outlet
EOR	End of Runway	glidr.....	glider
eqpt	equipment	GND	Ground Control
ERDA	Energy Research and Development Administration	gnd.....	ground
E-S	Enroute Supplement	govt.....	government
est	estimate	GP	Glide Path
estab.....	establish	Gp	Group
ETA	Estimated Time of Arrival	GPI.....	Ground Point of Intercept
ETD	Estimated Time of Departure	grad.....	gradient
ETE	Estimated Time Enroute	grd	guard
ETS	European Telephone System	GS	glide slope
EUR	European (ICAO Region)	GWT	gross weight
ev	every	H	Enroute High Altitude Chart (followed by identification)
evac	evacuate	H+	Hours or hours plus...minutes past the hour
exc	except	H24	continuous operation
exclد.....	exclude	HAA	Height Above Airport/Aerodrome
exer	exercise	HAL	Height Above Landing Area
exm	exempt	HAR	Height Above Runway
exp	expect	HAT	Height Above Touchdown
extد.....	extend	haz	hazard
extn	extension	hdg.....	heading
extv	extensive	HDTA.....	High Density Traffic Airport/Aerodrome
F/W.....	Fixed Wing	HF	High Frequency (3000 to 30,000 KHz)
FAA	Federal Aviation Administration	hgr	hangar
fac	facility	hgt	height
FAWS	Flight Advisory Weather Service	hi	high
fax	facsimile	HIRL.....	High Intensity Runway Lights
FBO	Fixed Base Operator	HO	Service available to meet operational requirements
FCC	Flight Control Center	hol	holiday
FCG	Foreign Clearance Guide	HOLF.....	Helicopter Outlying Field
FCLP.....	field carrier landing practice	hosp.....	hospital
fcst	forecast	HQ	Headquarters
Feb	February	hr	hour
FIC	Flight Information Center	HS	Service available during hours of scheduled operations
FIH	Flight Information Handbook	hsg	housing
FIR	Flight Information Region	hvy	heavy
FIS	Flight Information Service	HW	Heavy Weight
FL	flight level	hwy	highway
fld.....	field	HX	station having no specific working hours
fig.....	flashing	Hz	Hertz (cycles per second)
FLIP.....	Flight Information Publication	I	Island
flt	flight	IAP	Instrument Approach Procedure
flw	follow	IAS	Indicated Air Speed
FM	Fan Marker, Frequency Modulation	IAW	in accordance with
FOC	Flight Operations Center	ICAO.....	International Civil Aviation Organization
FOD	Foreign Object Damage	ident.....	identification
fone	telephone	IFF	Identification, Friend or Foe
FPL	Flight Plan	IFR	Instrument Flight Rules
fpm	feet per minute	IFR-S	FLIP IFR Supplement
fr	from	ILS	Instrument Landing System
freq	frequency, frequent	IM	Inner Marker
Fri	Friday	IMC	Instrument Meteorological Conditions
fng.....	firing	IMG	Immigration
FSS	Flight Service Station	immed.....	immediate
ft	foot	inbd.....	inbound
ftد.....	fighter		
GA	Glide Angle		
gal	gallon		

Abbreviation.....	Description
Inc	Incorporated
incl.....	include
incr.....	increase
indef.....	indefinite
info.....	information
inop.....	inoperative
inst.....	instrument
instl.....	install
instr.....	instruction
int.....	intersection
intcntl.....	intercontinental
intcp.....	intercept
intl.....	international
intmt.....	intermittent
ints.....	intense, intensity
invo.....	in the vicinity of
irreg.....	Irregularly
Jan.....	January
JASU.....	Jet Aircraft Starting Unit
JATO.....	Jet Assisted Take-Off
JOAP.....	Joint Oil Analysis Program
JOSAC.....	Joint Operational Support Airlift Center
JRB.....	Joint Reserve Base
Jul.....	July
Jun.....	June
K or Kt.....	Knots
kHz.....	kilohertz
KLAS.....	Knots Indicated Airspeed
KLIZ.....	Korea Limited Identification Zone
km.....	Kilometer
kw.....	kilowatt
L.....	Compass locator (Component of ILS system) under 25 Watts, 15 NM, Enroute Low Altitude Chart (followed by identification)
L.....	Local Time
LAHSO.....	Land and Hold-Short Operations
L-AOE.....	Limited Airport of Entry
LAWRS.....	Limited Aviation Weather Reporting Station
lb, lbs.....	pound (weight)
LC.....	local call
lcl.....	local
LCP.....	French Peripheral Classification Line
lctd.....	located
lctn.....	location
lctr.....	locator
LCVASI.....	Low Cost Visual Approach Slope Indicator
lczr.....	localizer
LD.....	long distance
LDA.....	Landing Distance Available
ldg.....	landing
LDIN.....	Lead-in Lights
LDOCF.....	Long Distance Operations Control Facility
len.....	length
lgt, lgtd, lgts.....	light, lighted, lights
LIRL.....	Low Intensity Runway Lights
LLWAS.....	Low-Level Wind Shear Alert System

Abbreviation.....	Description
LLZ.....	Localizer (Instrument Approach Procedures Identification only)
LMM.....	Compass locator at Middle Marker ILS
lo.....	low
LoALT or LA.....	Low Altitude
LOC.....	Localizer
LOM.....	Compass locator at Outer Marker ILS
LR.....	Long Range, Lead Radial
LRA.....	Landing Rights Airport
LRRS.....	Long Range RADAR Station
LSB.....	lower side band
ltd.....	limited
M.....	meters, magnetic (after a bearing), Military Circuit (Telephone)
MACC.....	Military Area Control Center
mag.....	magnetic
maint.....	maintain, maintenance
maj.....	major
MALS.....	Medium Intensity Approach Lighting System
MALSF.....	MALS with Sequenced Flashers
MALSR.....	MALS with Runway Alignment Indicator Lights
Mar.....	March
MARA.....	Military Activity Restricted Area
MATO.....	Military Air Traffic Operations
MATZ.....	Military Aerodrome Traffic Zone
max.....	maximum
mb.....	millibars
MCAC.....	Military Common Area Control
MCAF.....	Marine Corps Air Facility
MCALF.....	Marine Corps Auxiliary Landing Field
MCAS.....	Marine Corps Air Station
MCB.....	Marine Corps Base
MCC.....	Military Climb Corridor
MCOLF.....	Marine Corps Outlying Field
MDA.....	Minimum Descent Altitude
MEA.....	Minimum Enroute Altitude
med.....	medium
MEHT.....	Minimum Eye Height over Threshold
mem.....	memorial
MET.....	Meteorological, Meteorology
METAR.....	Aviation Routine Weather Report (in international MET figure code)
METRO.....	Pilot-to-Metro voice cell
MF.....	Medium Frequency (300 to 3000 KHz), Mandatory Frequency (Canada)
MFA.....	Minimum Flight Altitude
mgmt.....	Management
mgr.....	manager
MHz.....	Megahertz
mi.....	mile
MID/ASIA.....	Middle East/Asia (ICAO Region)
MIJI.....	Meaconing, Intrusion, Jamming, and Interference
Mil, mil.....	military
min.....	minimum, minute
MIRL.....	Medium Intensity Runway Lights
misl.....	missile
mkr.....	marker (beacon)
MM.....	Middle Marker of ILS
mnt.....	monitor
MOA.....	Military Operations Area

Abbreviation	Description	Abbreviation	Description
MOCA	Minimum Obstruction Clearance Altitude	ntc	notice
mod	modify	NVD	Night Vision Devices
MOG	Maximum (aircraft) on the Ground	NVG	Night Vision Goggles
MON	Minimum Operational Network	NW	Northwest
Mon	Monday	NWC	Naval Weapons Center
MP	Maintenance Period	O/A	On or about
MR	Medium Range	O/S	out of service
MRA	Minimum Reception Altitude	O/R	On Request
mrk	mark, marker	OAT	Operational Air Traffic
MSAW	minimum safe altitude warning	obsn	observation
msg	message	obst	obstruction
MSL	Mean Sea Level	OCA	Oceanic Control Area
msn	Mission	ocnl	occasional
mt	mount, mountain	Oct	October
MTAF	Mandatory Traffic Advisory Frequency	ODALS	Omnidirectional Approach Lighting System
MTCA	Military Terminal Control Area	ODO	Operations Duty Officer
mtlly	monthly	offl	official
MUAC	Military Upper Area Control	OIC	Officer In Charge
muni	municipal	OLF	Outlying Field
MWARA	Major World Air Route Area	OLS	Optical Landing System
N	North	OM	Outer Marker, ILS
N/A	not applicable	opr	operate, operator, operational
NA	not authorized (For Instrument Approach Procedure take-off and alternate MINIMA only)	OPS, ops	operations
NAAS	Naval Auxiliary Air Station	orig	original
NADC	Naval Air Development Center	OROCA	Off Route Obstruction Clearance Altitude
NADEP	Naval Air Depot	ORTCA	Off Route Terrain Clearance Altitude
NAEC	Naval Air Engineering Center	OT	other times
NAES	Naval Air Engineering Station	OTS	out of service
NAF	Naval Air Facility	outbd	outbound
NALCO	Naval Air Logistics Control Office	ovft	overflight
NALF	Naval Auxiliary Landing Field	ovrn	overnight
NALO	Navy Air Logistics Office	OX	oxygen
NAS	Naval Air Station	P/L	plain language
NAT	North Atlantic (ICAO Region)	PAC	Pacific (ICAO Region)
natl	national	PAEW	personnel and equipment working
nav	navigation	PALS	Precision Approach and Landing System (NAVY)
navaid	navigation aid	PAPI	Precision Approach Path Indicator
NAVMTO	Navy Material Transportation Office	PAR	Precision Approach Radar
NAWC	Naval Air Warfare Center	para	paragraph
NAWS	Naval Air Weapons Station	parl	parallel
NCRP	Non-Compulsory Reporting Point	pat	pattern
NDB	Non-Directional Radio Beacon	PAX	Passenger
NE	Northeast	PCL	pilot controlled lighting
nec	necessary	pent	penetrate
NEW	Net Explosives Weight	perm	permanent
ngt	right	perms	permission
NM	nautical miles	pers	personnel
nml	normal	PFC	Porous Friction Courses
NMR	nautical mile radius	PJE	Parachuting Activities/Exercises
No or Nr	number	p-line	power line
NOLF	Naval Outlying Field	PM	Post meridian, noon til midnight
NORDO	Lost communications or no radio installed/available in aircraft	PMRF	Pacific Missile Range Facility
NOTAM	Notice to Airmen	PMSV	Pilot-to-Metro Service
Nov	November	PN	prior notice
npi	non precision instrument	POB	persons on board
Nr or No	number	POL	Petrol, Oils and Lubricants
NS	Naval Station	posn	position
NS ABTMT	Noise Abatement	PPR	prior permission required
NSA	Naval Support Activity	prcht	parachute
NSF	Naval Support Facility	pref	prefer
NSTD, nstd	nonstandard	prev	previous

Abbreviation.....	Description
prim	primary
prk	park
PRM	Precision Runway Monitor
pro	procedure
proh	prohibited
pt	point
PTD	Pilot to Dispatcher
pub	publication
publ	publish
PVASI	Pulsating Visual Approach Slope Indicator
pvt	private
pwr	power
QFE.....	Altimeter Setting above station
QNE	Altimeter Setting of 29.92 inches which provides height above standard datum plane
QNH.....	Altimeter Setting which provides height above mean sea level
qtrs	quarters
quad.....	quadrant
R/T.....	Radiotelephony
R/W	Rotary/Wing
RACON	Radar Beacon
rad	radius, radial
RAIL.....	Runway Alignment Indicator Lights
RAMCC.....	Regional Air Movement Control Center
R-AOE.....	Regular Airport of Entry
RAPCON.....	Radar Approach Control (USAF)
RATCF	Radar Air Traffic Control Facility (Navy)
RCAG	Remote Center Air to Ground Facility
RCAGL	Remote Center Air to Ground Facility Long Range
RCL.....	runway centerline
RCLS.....	Runway Centerline Light System
RCO	Remote Communications Outlet
rcpt	reception
RCR	Runway Condition Reading
rcv	receive
rcvr	receiver
rdo	radio
reconst	reconstruct
reful	refueling
reg	regulation, regular
REIL.....	Runway End Identifier Lights
rel	reliable
relctd	relocated
REP	Reporting Point
req	request
RETIL	Rapid Exit Taxiway Indicator Light
Rgn	Region
Rgnl	Regional
rgt	right
rgt tfc	right traffic
rigd	realigned
RLLS	Runway Lead-in Light System
rmk	remark
rng	range, radio range
RNP	Required Navigation Performance
RON	Remain Overnight
Rot Lt or Bcn.....	Rotating Light or Beacon
RPI	Runway Point of Intercept
rpt.....	report
rqr.....	require

Abbreviation.....	Description
RR.....	Railroad
RRP	Runway Reference Point
RSC	Runway Surface Condition
RSDU.....	Radar Storm Detection Unit
RSE	Runway Starter Extension/Starter Strip
RSRS	Reduced Same Runway Separation
rstd	restricted
rte	route
ruf	rough
RVR.....	Runway Visual Range
RVSM	Reduced Vertical Separation Minima
rwy	runway
S	South
S/D.....	Seadrome
SALS.....	Short Approach Lighting System
SAR	Search and Rescue
Sat.....	Saturday
SAVASI.....	Simplified Abbreviated Visual Approach Slope Indicator
SAWRS	Supplement Aviation Weather Reporting Station
sby	standby
Sched.....	scheduled services
sctr	sector
SDF	Simplified Directional Facility
SE	Southeast
sec.....	second, section
secd	secondary
SELCAL.....	Selective Calling System
SELF	Strategic Expeditionary Landing Field
SEng.....	Single Engine
Sep.....	September
SFA	Single Frequency Approach
sfc	surface
SFL.....	Sequence Flashing Lights
SFRA	Special Flight Rules Area
SID	Standard Instrument Departure
SIDA	Secure Identification Display Area
SIF.....	Selective Identification Feature
sked	schedule
SM.....	statute miles
SOAP	Spectrometric Oil Analysis Program
SOF	Supervisor of Flying
SPB	Seaplane Base
SR	sunrise
SRE	Surveillance Radar Element of GCA (Instrument Approach Procedures Identification only)
SS	sunset
SSALS/R.....	Simplified Short Approach Lighting System/with RAIL
SSB	Single Sideband
SSR	Secondary Surveillance Radar
STA	Straight-in Approach
std	standard
stn	station
stor	storage
str-in	Straight-in
stu	student
subj	subject
sum	summer
Sun.....	Sunday
sur.....	surround
survl	survival, surveillance
suspd.....	suspended

AbbreviationDescription

svc.....	service
svcg.....	servicing
SW.....	Southwest
sys.....	system
TA.....	Transition Altitude
TAC.....	Tactical Air Command
TAF.....	Aerodrome (terminal or alternate) forecast in abbreviated form
TALCE.....	Tanker Aircraft Control Element
TCA.....	Terminal Control Area
TCH.....	Threshold Crossing Height
TCTA.....	Transcontinental Control Area
TD.....	Touchdown
TDWR.....	Terminal Doppler Weather Radar
TDZ.....	Touchdown Zone
TDZL.....	Touchdown Zone Lights
tfc.....	traffic
thld.....	threshold
thou.....	thousand
thru.....	through
Thu.....	Thursday
til.....	until
tkf, tkof.....	take-off
TLV.....	Transition Level
tmpry.....	temporary
TODA.....	Take-Off Distance Available
TORA.....	Take-Off Run Available
TP.....	Tire Pressure
TPA.....	Traffic Pattern Altitude
TRACON.....	Terminal Radar Approach Control (FAA)
tran.....	transient
trans.....	transmit
trml.....	terminal
trng.....	training
trns.....	transition
TRSA.....	Terminal Radar Service Area
Tue.....	Tuesday
TV.....	Television
twr.....	tower
twy.....	taxiway
UACC.....	Upper Area Control Center (used outside US)
UAS.....	Unmanned Aerial Systems
UC.....	Under Construction
UCN.....	Urgent Change Notice
UDA.....	Upper Advisory Area
UDF.....	Ultra High Frequency Direction Finder
UFN.....	until further notice
UHF.....	Ultra High Frequency (300 to 3000 MHz)
UIR.....	Upper Flight Information Region
una.....	unable
unauthd.....	unauthorized
unavbl.....	unavailable
unctl.....	uncontrolled
unk.....	unknown
unlgtd.....	unlighted
unltd.....	unlimited
unmrk.....	unmarked
unmto.....	unmonitored
unrel.....	unreliable

Abbreviation..... Description

unrstd.....	unrestricted
unsatfy.....	unsatisfactory
unskd.....	unscheduled
unsvc.....	unserviceable
unuse, unusbl.....	unusable
USA.....	United States Army
USAF.....	United States Air Force
USB.....	Upper Side Band
USCG.....	United States Coast Guard
USMC.....	United States Marine Corps
USN.....	United States Navy
UTA.....	Upper Control Area
UTC.....	Coordinated Universal Time
V.....	Defense Switching Network (telephone, formerly AUTOVON)
V/STOL.....	Vertical and Short Take-off and Landing aircraft
VAL.....	Visiting Aircraft Line
var.....	variation (magnetic variation)
VASI.....	Visual Approach Slope Indicator
vnty.....	vicinity
VDF.....	Very High Frequency Direction Finder
veh.....	vehicle
vert.....	vertical
VFR.....	Visual Flight Rules
VFR-S.....	FLIP VFR Supplement
VHF.....	Very High Frequency (30 to 300 MHz)
VIP.....	Very Important Person
vis.....	visibility
VMC.....	Visual Meteorological Conditions
VOIP.....	Voice Over Internet Protocol
VOLMET.....	Meteorological Information for Aircraft in Flight
VOT.....	VOR Receiver Testing Facility
W.....	Warning Area (followed by identification), Watts, West, White
WCH.....	Wheel Crossing Height
Wed.....	Wednesday
Wg.....	Wing
WIE.....	with immediate effect
win.....	winter
WIP.....	work in progress
WSO.....	Weather Service Office
WSFO.....	Weather Service Forecast Office
wk.....	week
wkd.....	weekday
wkly.....	weekly
wng.....	warning
wo.....	without
WSP.....	Weather System Processor
wt.....	weight
wx.....	weather
yd.....	yard
yr.....	year
Z.....	Greenwich Mean Time (time groups only)

**INTENTIONALLY
LEFT
BLANK**

AIRPORT/FACILITY DIRECTORY LEGEND

SAMPLE

①
CITY NAME
 ② **AIRPORT NAME** (ALTERNATE NAME) ③ (LTS)(KLTS) ④ CIV/MIL ⑤ 3 N ⑥ UTC-6(-5DT) N34°41.93' W99°20.20' ⑦ **JACKSONVILLE**
 200 B TPA—1000(800) AOE LRA Class IV, ARFF Index A NOTAM FILE ORL Not insp. MON Airport **COPTER**
 ⑧ **H-4G, L-19C**
 ⑨ **IAP, DIAP AD**

⑩ → **Rwy 18-36:**H12004X200 (ASPH-CONC-GRVD)
 S-90, D-160, 2D-300 PCN 80 R/B/W/T HIRL CL
Rwy 18: RLLS. MALSF. TDZL. REIL. PAPI(P2R)—GA 3.0° TCH 36' .
 RVR—TMR. Thld dsplcd 300' . Trees. Rgt tfc. 0.3% up.

Rwy 36: ALSF1. 0.4% down.
Rwy 09-27: H6000X150 (ASPH) MIRL
Rwy 173-353: H3515X150 (ASPH-PFC) AUW PCN 59 F/A/W/T

⑪ → **LAND AND HOLD—SHORT OPERATIONS**

LDG RWY	HOLD—SHORT POINT	AVBL LDG DIST
Rwy 18	09-27	6500
Rwy 36	09-27	5400

⑫ → **RUNWAY DECLARED DISTANCE INFORMATION**
Rwy 18: TORA-12004 TODA-12004 ASDA-11704 LDA-11504
Rwy 36: TORA-12004 TODA-12004 ASDA-12004 LDA-11704

⑬ → **ARRESTING GEAR/SYSTEM**
Rwy 18 HOOK E5 (65' OVRN) BAK-14 BAK-12B (1650')
 BAK-14 BAK-12B (1087') HOOK E5 (74' OVRN) **Rwy 36**

⑭ → **SERVICE:** S4 FUEL 100LL, JET A OX 1, 3 LGT ACTIVATE MALS Rwy 29, REIL Rwy 11, VASI Rwy 11, HIRL Rwy 11-29, PAPI Rwy 17 and Rwy 35, MIRL Rwy 17-35—CTAF. **MILITARY—A-GEAR E-5** connected on dep end, disconnected on apch end.
JASU 3(AM32A-60) 2(A/M32A-86) **FUEL J8**(Mil)(NC-100, A)
FLUID W SP PRESAIR LOX OIL O-128 MAINT S1 Mon-Fri 1000-2200Z‡
TRAN ALERT Avbl 1300-0200Z‡ svc limited weekends.

⑮ → **NOISE:** Noise abatement 3 miles from Rwy 18. Contact tower manager.

⑯ → **AIRPORT REMARKS:** Special Air Traffic Rules—Part 93, see Regulatory Notices. Attended 1200-0300Z‡. Parachute Jumping. Deer invof arpt. Heavy jumbo jet training surface to 9000' . Twy A clsd indef. Flight Notification Service (ADCUS) avbl.
MILITARY REMARKS: ANG PPR/Official Business Only. Base OPS DSN 638-4390, C503-335-4222. Ctc Base OPS 15 minutes prior to ldg and after dep. Limited tran parking.

⑰ → **AIRPORT MANAGER:** (580) 481-5739

⑱ → **WEATHER DATA SOURCES:** AWOS-1 120.3 (202) 426-8000. LAWRS.

COMMUNICATIONS: SFA CTAF 122.8 UNICOM 122.95 ATIS 127.25 273.5 (202) 426-8003 PTD 372.2

NAME RCO 112.2T 112.1R (NAME RADIO)

Ⓡ **NAME APP/DEP CON** 128.35 257.725 (1200-0400Z‡)

TOWER 119.65 255.6 (1200-0400Z‡) **GND CON** 121.7 **GCO** 135.075 (ORLANDO CLNC) **CLNC DEL** 125.55

CPDLC D-HZWXR, D-TAXI, DCL (LOGON KMEM)

NAME COMD POST (GERONIMO) 311.0 321.4 6761 **PMSV METRO** 239.8 **NAME OPS** 257.5

⑳ → **AIRSPACE:** CLASS B See VFR Terminal Area Chart.

㉑ → **VOR TEST FACILITY (VOT):** 116.7

㉒ → **RADIO AIDS TO NAVIGATION:** NOTAM FILE ORL. VHF/DF ctc FSS.

(H) **VORTAC** 112.2 MCO Chan 59 N28°32.55' W81°20.12' at fld. 1110/8E.

(H) **TACAN** Chan 29 CBU (109.2) N28°32.65' W81°21.12' at fld. 1115/8E.

HERNY NDB (LOM) 221 OR N28°37.40' W81°21.05' 177° 5.4 NM to fld.

ILS/DME 108.5 I-ORL Chan 22 Rwy 18. Class IIE. LOM **HERNY NDB.**

ASR/PAR (1200-0400Z‡)

㉓ → **COMM/NAV/WEATHER REMARKS:** Emerg frequency 121.5 not avbl at twr.

HELIPAD H1: H100X75 (ASPH)


HELIPAD H2: H60X60 (ASPH)

HELIPORT REMARKS: Helipad H1 lctd on general aviation side and H2 lctd on air carrier side of arpt.

187 TPA 1000(813)

WATERWAY 15-33: 5000X425 (WATER)

SEAPLANE REMARKS: Birds roosting and feeding areas along river banks. Seaplanes operating adjacent to SW side of arpt not visible from twr and are required to ctc twr.

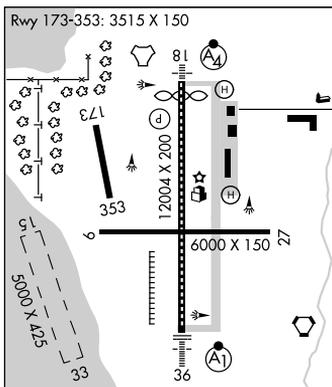

All bearings and radials are magnetic unless otherwise specified. All mileages are nautical unless otherwise noted. All times are Coordinated Universal Time (UTC) except as noted. All elevations are in feet above/below Mean Sea Level (MSL) unless otherwise noted. The horizontal reference datum of this publication is North American Datum of 1983 (NAD83), which for charting purposes is considered equivalent to World Geodetic System 1984 (WGS 84).

10

SKETCH LEGEND

19171

RUNWAYS/LANDING AREAS

- Hard Surface
- Metal Surface
- Other than Hard Surface Runways
- Water Runway
- Under Construction
- Closed Rwy
- Closed Pavement
- Helicopter Landings Area
- Displaced Threshold
- Taxiway, Apron and Stopways

RADIO AIDS TO NAVIGATION

- VORTAC
- VOR
- VOR/DME
- NDB
- TACAN
- NDB/DME
- DME

MISCELLANEOUS AERONAUTICAL FEATURES

- Airport Beacon
- Wind Cone
- Landing Tee
- Tetrahedron
- Control Tower TWR

When control tower and rotating beacon are co-located beacon symbol will be used and further identified as TWR.

MISCELLANEOUS BASE AND CULTURAL FEATURES

- Buildings
- Power Lines
- Towers
- Wind Turbine
- Tanks
- Oil Well
- Smoke Stack
- Obstruction
- Controlling Obstruction
- Trees
- Populated Places
- Cuts and Fills
- Cliffs and Depressions
- Ditch
- Hill

APPROACH LIGHTING SYSTEMS

A dot "•" portrayed with approach lighting letter identifier indicates sequenced flashing lights (F) installed with the approach lighting system e.g. (A1) Negative symbology, e.g., (A1) (V) indicates Pilot Controlled Lighting (PCL).

- Runway Centerline Lighting
- (A) Approach Lighting System ALSF-2
- (A1) Approach Lighting System ALSF-1
- (A2) Short Approach Lighting System SALS/SALSF
- (A3) Simplified Short Approach Lighting System (SSALR) with RAIL
- (A4) Medium Intensity Approach Lighting System (MALS and MALSF)/(SSALS and SSALF)
- (A5) Medium Intensity Approach Lighting System (MALSR) and RAIL
- (V) Omnidirectional Approach Lighting System (ODALS)
- (D) Navy Parallel Row and Cross Bar
- (F) Air Force Overrun
- (V) Visual Approach Slope Indicator with Standard Threshold Clearance provided
- (V2) Pulsating Visual Approach Slope Indicator (PVASI)
- (V3) Visual Approach Slope Indicator with a threshold crossing height to accommodate long bodied or jumbo aircraft
- (V4) Tri-color Visual Approach Slope Indicator (TRCV)
- (V5) Approach Path Alignment Panel (APAP)
- (P) Precision Approach Path Indicator (PAPI)

LEGEND

This directory is a listing of data on record with the FAA on public-use airports, military airports and selected private-use airports specifically requested by the Department of Defense (DoD) for which a DoD Instrument Approach Procedure has been published in the U.S. Terminal Procedures Publication. Additionally this listing contains data for associated terminal control facilities, air route traffic control centers, and radio aids to navigation within the conterminous United States, Puerto Rico and the Virgin Islands. Civil airports and joint Civil/Military airports which are open to the public are listed alphabetically by state, associated city and airport name and cross-referenced by airport name. Military airports and private-use (limited civil access) joint Military/Civil airports are listed alphabetically by state and official airport name and cross-referenced by associated city name. Nav aids, flight service stations and remote communication outlets that are associated with an airport, but with a different name, are listed alphabetically under their own name, as well as under the airport with which they are associated.

The listing of an airport as open to the public in this directory merely indicates the airport operator's willingness to accommodate transient aircraft, and does not represent that the airport conforms with any Federal or local standards, or that it has been approved for use on the part of the general public. Military airports, private-use airports, and private-use (limited civil access) joint Military/Civil airports are open to civil pilots only in an emergency or with prior permission. See Special Notice Section, Civil Use of Military Fields.

The information on obstructions is taken from reports submitted to the FAA. Obstruction data has not been verified in all cases. Pilots are cautioned that objects not indicated in this tabulation (or on the airports sketches and/or charts) may exist which can create a hazard to flight operation. Detailed specifics concerning services and facilities tabulated within this directory are contained in the Aeronautical Information Manual, Basic Flight Information and ATC Procedures.

The legend items that follow explain in detail the contents of this Directory and are keyed to the circled numbers on the sample on the preceding pages.

① CITY/AIRPORT NAME

Civil and joint Civil/Military airports which are open to the public are listed alphabetically by state and associated city. Where the city name is different from the airport name the city name will appear on the line above the airport name. Airports with the same associated city name will be listed alphabetically by airport name and will be separated by a dashed rule line. A solid rule line will separate all others. FAA approved helipads and seaplane landing areas associated with a land airport will be separated by a dotted line. Military airports and private-use (limited civil access) joint Military/Civil airports are listed alphabetically by state and official airport name.

② ALTERNATE NAME

Alternate names, if any, will be shown in parentheses.

③ LOCATION IDENTIFIER

The location identifier is a three or four character FAA code followed by a four-character ICAO code, when assigned, to airports. If two different military codes are assigned, both codes will be shown with the primary operating agency's code listed first. These identifiers are used by ATC in lieu of the airport name in flight plans, flight strips and other written records and computer operations. Zeros will appear with a slash to differentiate them from the letter "O".

④ OPERATING AGENCY

Airports within this directory are classified into two categories, Military/Federal Government and Civil airports open to the general public, plus selected private-use airports. The operating agency is shown for military, private-use and joint use airports. The operating agency is shown by an abbreviation as listed below. When an organization is a tenant, the abbreviation is enclosed in parenthesis. No classification indicates the airport is open to the general public with no military tenant.

A	US Army	MC	Marine Corps
AFRC	Air Force Reserve Command	MIL/CIV	Joint Use Military/Civil Limited Civil Access
AF	US Air Force	N	Navy
ANG	Air National Guard	NAF	Naval Air Facility
AR	US Army Reserve	NAS	Naval Air Station
ARNG	US Army National Guard	NASA	National Air and Space Administration
CG	US Coast Guard	P	US Civil Airport Wherein Permit Covers Use by Transient Military Aircraft
CIV/MIL	Joint Use Civil/Military Open to the Public	PVT	Private Use Only (Closed to the Public)
DND	Department of National Defense Canada		
DOE	Department of Energy		

⑤ AIRPORT LOCATION

Airport location is expressed as distance and direction from the center of the associated city in nautical miles and cardinal points, e.g., 3 N.

⑥ TIME CONVERSION

Hours of operation of all facilities are expressed in Coordinated Universal Time (UTC) and shown as "Z" time. The directory indicates the number of hours to be subtracted from UTC to obtain local standard time and local daylight saving time UTC-5(-4DT). The symbol ‡ indicates that during periods of Daylight Saving Time (DST) effective hours will be one hour earlier than shown. In those areas where daylight saving time is not observed the (-4DT) and ‡ will not be shown. Daylight saving time is in effect from 0200 local time the second Sunday in March to 0200 local time the first Sunday in November. Canada and all U.S. Conterminous States observe daylight saving time except Arizona and Puerto Rico, and the Virgin Islands. If the state observes daylight saving time and the operating times are other than daylight saving times, the operating hours will include the dates, times and no ‡ symbol will be shown, i.e., April 15-Aug 31 0630-1700Z, Sep 1-Apr 14 0600-1700Z.

7 GEOGRAPHIC POSITION OF AIRPORT—AIRPORT REFERENCE POINT (ARP)

Positions are shown as hemisphere, degrees, minutes and hundredths of a minute and represent the approximate geometric center of all usable runway surfaces.

8 CHARTS

Charts refer to the Sectional Chart and Low and High Altitude Enroute Chart and panel on which the airport or facility is depicted. Pacific Enroute Chart will be indicated by P. Area Enroute Charts will be indicated by A. Helicopter Chart depictions will be indicated as COPTER. IFR Gulf of Mexico West and IFR Gulf of Mexico Central will be referenced as GOMW and GOMC.

9 INSTRUMENT APPROACH PROCEDURES, AIRPORT DIAGRAMS

IAP indicates an airport for which a prescribed (Public Use) FAA Instrument Approach Procedure has been published. DIAP indicates an airport for which a prescribed DoD Instrument Approach Procedure has been published in the U.S. Terminal Procedures. See the Special Notice Section of this directory, Civil Use of Military Fields and the Aeronautical Information Manual 5-4-5 Instrument Approach Procedure Charts for additional information. AD indicates an airport for which an airport diagram has been published. Airport diagrams are located in the back of each Chart Supplement volume alphabetically by associated city and airport name.

10 AIRPORT SKETCH

The airport sketch, when provided, depicts the airport and related topographical information as seen from the air and should be used in conjunction with the text. It is intended as a guide for pilots in VFR conditions. Symbology that is not self-explanatory will be reflected in the sketch legend. The airport sketch will be oriented with True North at the top.

11 ELEVATION

The highest point of an airport's usable runways measured in feet from mean sea level. When elevation is sea level it will be indicated as "00". When elevation is below sea level a minus "-" sign will precede the figure.

12 ROTATING LIGHT BEACON

B indicates rotating beacon is available. Rotating beacons operate sunset to sunrise unless otherwise indicated in the AIRPORT REMARKS or MILITARY REMARKS segment of the airport entry.

13 TRAFFIC PATTERN ALTITUDE

Traffic Pattern Altitude (TPA)—The first figure shown is TPA above mean sea level. The second figure in parentheses is TPA above airport elevation. TPA will only be published if they differ from the recommended altitudes as described in the AIM, Traffic Patterns. Multiple TPA shall be shown as "TPA—See Remarks" and detailed information shall be shown in the Airport or Military Remarks Section. Traffic pattern data for USAF bases, USN facilities, and U.S. Army airports (including those on which ACC or U.S. Army is a tenant) that deviate from standard pattern altitudes shall be shown in Military Remarks.

14 AIRPORT OF ENTRY, LANDING RIGHTS, AND CUSTOMS USER FEE AIRPORTS

U.S. CUSTOMS USER FEE AIRPORT—Private Aircraft operators are frequently required to pay the costs associated with customs processing.

AOE—Airport of Entry. A customs Airport of Entry where permission from U.S. Customs is not required to land. However, at least one hour advance notice of arrival is required.

LRA—Landing Rights Airport. Application for permission to land must be submitted in advance to U.S. Customs. At least one hour advance notice of arrival is required.

NOTE: Advance notice of arrival at both an AOE and LRA airport may be included in the flight plan when filed in Canada or Mexico. Where Flight Notification Service (ADCUS) is available the airport remark will indicate this service. This notice will also be treated as an application for permission to land in the case of an LRA. Although advance notice of arrival may be relayed to Customs through Mexico, Canada, and U.S. Communications facilities by flight plan, the aircraft operator is solely responsible for ensuring that Customs receives the notification. (See Customs, Immigration and Naturalization, Public Health and Agriculture Department requirements in the International Flight Information Manual for further details.)

U.S. CUSTOMS AIR AND SEA PORTS, INSPECTORS AND AGENTS

Northeast Sector (New England and Atlantic States—ME to MD)	407-975-1740
Southeast Sector (Atlantic States—DC, WV, VA to FL)	407-975-1780
Central Sector (Interior of the US, including Gulf states—MS, AL, LA)	407-975-1760
Southwest East Sector (OK and eastern TX)	407-975-1840
Southwest West Sector (Western TX, NM and AZ)	407-975-1820
Pacific Sector (WA, OR, CA, HI and AK)	407-975-1800

15 CERTIFICATED AIRPORT (14 CFR PART 139)

Airports serving Department of Transportation certified carriers and certified under 14 CFR part 139 are indicated by the Class and the ARFF Index; e.g. Class I, ARFF Index A, which relates to the availability of crash, fire, rescue equipment. Class I airports can have an ARFF Index A through E, depending on the aircraft length and scheduled departures. Class II, III, and IV will always carry an Index A.

AIRPORT CLASSIFICATIONS

Type of Air Carrier Operation	Class I	Class II	Class III	Class IV
Scheduled Air Carrier Aircraft with 31 or more passenger seats	X			
Unscheduled Air Carrier Aircraft with 31 or more passengers seats	X	X		X

AIRPORT/FACILITY DIRECTORY LEGEND

Type of Air Carrier Operation	Class I	Class II	Class III	Class IV
Scheduled Air Carrier Aircraft with 10 to 30 passenger seats	X	X	X	

INDICES AND AIRCRAFT RESCUE AND FIRE FIGHTING EQUIPMENT REQUIREMENTS

Airport Index	Required No. Vehicles	Aircraft Length	Scheduled Departures	Agent + Water for Foam
A	1	<90'	≥1	500#DC or HALON 1211 or 450#DC + 100 gal H ₂ O
B	1 or 2	≥90', <126'	≥5	Index A + 1500 gal H ₂ O
		≥126', <159'	<5	
C	2 or 3	≥126', <159'	≥5	Index A + 3000 gal H ₂ O
		≥159', <200'	<5	
D	3	≥159', <200'	_____	Index A + 4000 gal H ₂ O
		>200'	<5	
E	3	≥200'	≥5	Index A + 6000 gal H ₂ O

> Greater Than; < Less Than; ≥ Equal or Greater Than; ≤ Equal or Less Than; H₂O—Water; DC—Dry Chemical.

NOTE: The listing of ARFF index does not necessarily assure coverage for non-air carrier operations or at other than prescribed times for air carrier. ARFF Index Ltd.—indicates ARFF coverage may or may not be available, for information contact airport manager prior to flight.

16 NOTAM SERVICE

All public use landing areas are provided NOTAM service. A NOTAM FILE identifier is shown for individual landing areas, e.g., "NOTAM FILE BNA". See the AIM, Basic Flight Information and ATC Procedures for a detailed description of NOTAMs. Current NOTAMs are available online from the Federal NOTAM System (FNS) NOTAM Search website <https://notams.aim.faa.gov/notamSearch/>, private vendors, or on request from Flight Service. Military NOTAMs are available using the Defense Internet NOTAM Service (DINS) at <https://www.notams.faa.gov>. Pilots flying to or from airports not available through the FNS or DINS can obtain assistance from Flight Service.

17 FAA INSPECTION

All airports not inspected by FAA will be identified by the note: Not insp. This indicates that the airport information has been provided by the owner or operator of the field.

18 MINIMUM OPERATIONAL NETWORK (MON) AIRPORT DESIGNATION

MON Airports have at least one VOR or ILS instrument approach procedure that can be flown without the need for GPS, WAAS, DME, NDB or RADAR. The primary purpose of the MON designation is for recovery in case of GPS outage.

19 RUNWAY DATA

Runway information is shown on two lines. That information common to the entire runway is shown on the first line while information concerning the runway ends is shown on the second or following line. Runway direction, surface, length, width, weight bearing capacity, lighting, and slope, when available are shown for each runway. Multiple runways are shown with the longest runway first. Direction, length, width, and lighting are shown for sea-lanes. The full dimensions of helipads are shown, e.g., 50X150. Runway data that requires clarification will be placed in the remarks section.

RUNWAY DESIGNATION

Runways are normally numbered in relation to their magnetic orientation rounded off to the nearest 10 degrees. Parallel runways can be designated L (left)/R (right)/C (center). Runways may be designated as Ultralight or assault strips. Assault strips are shown by magnetic bearing.

RUNWAY DIMENSIONS

Runway length and width are shown in feet. Length shown is runway end to end including displaced thresholds, but excluding those areas designed as overruns.

RUNWAY SURFACE AND SURFACE TREATMENT

Runway lengths prefixed by the letter "H" indicate that the runways are hard surfaced (concrete, asphalt, or part asphalt-concrete). If the runway length is not prefixed, the surface is sod, clay, etc. The runway surface composition is indicated in parentheses after runway length as follows:

(AFSC)—Aggregate friction seal coat

(GRVL)—Gravel, or cinders

(SAND)—Sand

- | | | |
|---|--|------------------|
| (AM2)—Temporary metal planks coated with nonskid material | (MATS)—Pierced steel planking, landing mats, membranes | (TURF)—Turf |
| (ASPH)—Asphalt | (PEM)—Part concrete, part asphalt | (TRTD)—Treated |
| (CONC)—Concrete | (PFC)—Porous friction courses | (WC)—Wire combed |
| (DIRT)—Dirt | (PSP)—Pierced steel plank | |
| (GRVD)—Grooved | (RFSC)—Rubberized friction seal coat | |

RUNWAY WEIGHT BEARING CAPACITY

Runway strength data shown in this publication is derived from available information and is a realistic estimate of capability at an average level of activity. It is not intended as a maximum allowable weight or as an operating limitation. Many airport pavements are capable of supporting limited operations with gross weights in excess of the published figures. Permissible operating weights, insofar as runway strengths are concerned, are a matter of agreement between the owner and user. When desiring to operate into any airport at weights in excess of those published in the publication, users should contact the airport management for permission. Runway strength figures are shown in thousand of pounds, with the last three figures being omitted. Add 000 to figure following S, D, 2S, 2T, AUW, SWL, etc., for gross weight capacity. A blank space following the letter designator is used to indicate the runway can sustain aircraft with this type landing gear, although definite runway weight bearing capacity figures are not available, e.g., S, D. Applicable codes for typical gear configurations with S=Single, D=Dual, T=Triple and Q=Quadruple:

CURRENT	NEW	NEW DESCRIPTION
S	S	Single wheel type landing gear (DC3), (C47), (F15), etc.
D	D	Dual wheel type landing gear (BE1900), (B737), (A319), etc.
T	D	Dual wheel type landing gear (P3, C9).
ST	2S	Two single wheels in tandem type landing gear (C130).
TRT	2T	Two triple wheels in tandem type landing gear (C17), etc.
DT	2D	Two dual wheels in tandem type landing gear (B707), etc.
TT	2D	Two dual wheels in tandem type landing gear (B757, KC135).
SBT	2D/D1	Two dual wheels in tandem/dual wheel body gear type landing gear (KC10).
None	2D/2D1	Two dual wheels in tandem/two dual wheels in tandem body gear type landing gear (A340-600).
DDT	2D/2D2	Two dual wheels in tandem/two dual wheels in double tandem body gear type landing gear (B747, E4).
TTT	3D	Three dual wheels in tandem type landing gear (B777), etc.
TT	D2	Dual wheel gear two struts per side main gear type landing gear (B52).
TDT	C5	Complex dual wheel and quadruple wheel combination landing gear (C5).

AUW—All up weight. Maximum weight bearing capacity for any aircraft irrespective of landing gear configuration.

SWL—Single Wheel Loading. (This includes information submitted in terms of Equivalent Single Wheel Loading (ESWL) and Single Isolated Wheel Loading).

PSI—Pounds per square inch. PSI is the actual figure expressing maximum pounds per square inch runway will support, e.g., (SWL 000/PSI 535).

Omission of weight bearing capacity indicates information unknown.

The ACN/PCN System is the ICAO standard method of reporting pavement strength for pavements with bearing strengths greater than 12,500 pounds. The Pavement Classification Number (PCN) is established by an engineering assessment of the runway. The PCN is for use in conjunction with an Aircraft Classification Number (ACN). Consult the Aircraft Flight Manual, Flight Information Handbook, or other appropriate source for ACN tables or charts. Currently, ACN data may not be available for all aircraft. If an ACN table or chart is available, the ACN can be calculated by taking into account the aircraft weight, the pavement type, and the subgrade category. For runways that have been evaluated under the ACN/PCN system, the PCN will be shown as a five-part code (e.g. PCN 80 R/B/W/T). Details of the coded format are as follows:

NOTE: Prior permission from the airport controlling authority is required when the ACN of the aircraft exceeds the published PCN or aircraft tire pressure exceeds the published limits.

- | | |
|--|--|
| <p>(1) The PCN NUMBER—The reported PCN indicates that an aircraft with an ACN equal or less than the reported PCN can operate on the pavement subject to any limitation on the tire pressure.</p> <p>(2) The type of pavement:
R — Rigid
F — Flexible</p> <p>(3) The pavement subgrade category:
A — High
B — Medium
C — Low
D — Ultra-low</p> | <p>(4) The maximum tire pressure authorized for the pavement:
W — Unlimited, no pressure limit
X — High, limited to 254 psi (1.75 MPa)
Y — Medium, limited to 181 psi (1.25MPa)
Z — Low, limited to 73 psi (0.50 MPa)</p> <p>(5) Pavement evaluation method:
T — Technical evaluation
U — By experience of aircraft using the pavement</p> |
|--|--|

RUNWAY LIGHTING

Lights are in operation sunset to sunrise. Lighting available by prior arrangement only or operating part of the night and/or pilot controlled lighting with specific operating hours are indicated under airport or military remarks. At USN/USMC facilities lights are available only during airport hours of operation. Since obstructions are usually lighted, obstruction lighting is not included in this code. Unlighted obstructions on or surrounding an airport will be noted in airport or military remarks. Runway lights nonstandard (NSTD) are systems for which the light fixtures are not FAA approved L-800 series: color, intensity, or spacing does not meet FAA standards. Nonstandard runway lights, VASI, or any other system not listed below will be shown in airport remarks or military service. Temporary, emergency or limited runway edge lighting such as flares, smudge pots, lanterns or portable runway lights will also be shown in airport remarks or military service. Types of lighting are shown with the runway or runway end they serve.

NSTD—Light system fails to meet FAA standards.	SALS—Short Approach Lighting System.
LIRL—Low Intensity Runway Lights.	SALSF—Short Approach Lighting System with Sequenced Flashing Lights.
MIRL—Medium Intensity Runway Lights.	SSALS—Simplified Short Approach Lighting System.
HIRL—High Intensity Runway Lights.	SSALF—Simplified Short Approach Lighting System with Sequenced Flashing Lights.
RAIL—Runway Alignment Indicator Lights.	SSALR—Simplified Short Approach Lighting System with Runway Alignment Indicator Lights.
REIL—Runway End Identifier Lights.	ALSAF—High Intensity Approach Lighting System with Sequenced Flashing Lights.
CL—Centerline Lights.	ALSF1—High Intensity Approach Lighting System with Sequenced Flashing Lights, Category I, Configuration.
TDZL—Touchdown Zone Lights.	ALSF2—High Intensity Approach Lighting System with Sequenced Flashing Lights, Category II, Configuration.
ODALS—Omni Directional Approach Lighting System.	SF—Sequenced Flashing Lights.
AF OVRN—Air Force Overrun 1000' Standard Approach Lighting System.	OLS—Optical Landing System.
MALS—Medium Intensity Approach Lighting System.	WAVE—OFF.
MALSF—Medium Intensity Approach Lighting System with Sequenced Flashing Lights.	
MALSRL—Medium Intensity Approach Lighting System with Runway Alignment Indicator Lights.	
RLLS—Runway Lead-in Light System	

NOTE: Civil ALSF2 may be operated as SSALR during favorable weather conditions. When runway edge lights are positioned more than 10 feet from the edge of the usable runway surface a remark will be added in the "Remarks" portion of the airport entry. This is applicable to Air Force, Air National Guard and Air Force Reserve Bases, and those joint use airfields on which they are tenants.

VISUAL GLIDESLOPE INDICATORS

APAP—A system of panels, which may or may not be lighted, used for alignment of approach path.	
PNIL APAP on left side of runway	PNIR APAP on right side of runway
PAPI—Precision Approach Path Indicator	
P2L 2—identical light units placed on left side of runway	P4L 4—identical light units placed on left side of runway
P2R 2—identical light units placed on right side of runway	P4R 4—identical light units placed on right side of runway
PVASI—Pulsating/steady burning visual approach slope indicator, normally a single light unit projecting two colors.	
PSIL PVASI on left side of runway	PSIR PVASI on right side of runway
SAVASI—Simplified Abbreviated Visual Approach Slope Indicator	
S2L 2—box SAVASI on left side of runway	S2R 2—box SAVASI on right side of runway
TRCV—Tri-color visual approach slope indicator, normally a single light unit projecting three colors.	
TRIL TRCV on left side of runway	TRIR TRCV on right side of runway
VASI—Visual Approach Slope Indicator	
V2L 2—box VASI on left side of runway	V6L 6—box VASI on left side of runway
V2R 2—box VASI on right side of runway	V6R 6—box VASI on right side of runway
V4L 4—box VASI on left side of runway	V12 12—box VASI on both sides of runway
V4R 4—box VASI on right side of runway	V16 16—box VASI on both sides of runway

NOTE: Approach slope angle and threshold crossing height will be shown when available; i.e., -GA 3.5° TCH 37'.

PILOT CONTROL OF AIRPORT LIGHTING

Key Mike	Function
7 times within 5 seconds	Highest intensity available
5 times within 5 seconds	Medium or lower intensity (Lower REIL or REIL-Off)
3 times within 5 seconds	Lowest intensity available (Lower REIL or REIL-Off)

Available systems will be indicated in the Service section, e.g., **LGT** ACTIVATE HIRL Rwy 07-25, MALSRL Rwy 07, and VASI Rwy 07—122.8.

Where the airport is not served by an instrument approach procedure and/or has an independent type system of different specification installed by the airport sponsor, descriptions of the type lights, method of control, and operating frequency will be

explained in clear text. See AIM, "Aeronautical Lighting and Other Airport Visual Aids," for a detailed description of pilot control of airport lighting.

RUNWAY SLOPE

When available, runway slope data will be provided. Runway slope will be shown only when it is 0.3 percent or greater. On runways less than 8000 feet, the direction of the slope up will be indicated, e.g., 0.3% up NW. On runways 8000 feet or greater, the slope will be shown (up or down) on the runway end line, e.g., RWY 13: 0.3% up., RWY 31: Pole. Rgt tfc. 0.4% down.

RUNWAY END DATA

Information pertaining to the runway approach end such as approach lights, touchdown zone lights, runway end identification lights, visual glideslope indicators, displaced thresholds, controlling obstruction, and right hand traffic pattern, will be shown on the specific runway end. "Rgt tfc"—Right traffic indicates right turns should be made on landing and takeoff for specified runway end. Runway Visual Range shall be shown as "RVR" appended with "T" for touchdown, "M" for midpoint, and "R" for rollout; e.g., RVR-TMR.

20 LAND AND HOLD—SHORT OPERATIONS (LAHSO)

LAHSO is an acronym for "Land and Hold-Short Operations" These operations include landing and holding short of an intersection runway, an intersecting taxiway, or other predetermined points on the runway other than a runway or taxiway. Measured distance represents the available landing distance on the landing runway, in feet.

Specific questions regarding these distances should be referred to the air traffic manager of the facility concerned. The Aeronautical Information Manual contains specific details on hold—short operations and markings.

21 RUNWAY DECLARED DISTANCE INFORMATION

TORA—Take-off Run Available. The length of runway declared available and suitable for the ground run of an aeroplane take-off. TODA—Take-off Distance Available. The length of the take-off run available plus the length of the clearway, if provided.

ASDA—Accelerate-Stop Distance Available. The length of the take-off run available plus the length of the stopway, if provided.

LDA—Landing Distance Available. The length of runway which is declared available and suitable for the ground run of an aeroplane landing.

22 ARRESTING GEAR/SYSTEMS

Arresting gear is shown as it is located on the runway. The a-gear distance from the end of the appropriate runway (or into the overrun) is indicated in parentheses. A-Gear which has a bi-direction capability and can be utilized for emergency approach end engagement is indicated by a (B). Up to 15 minutes advance notice may be required for rigging A-Gear for approach and engagement. Airport listing may show availability of other than US Systems. This information is provided for emergency requirements only. Refer to current aircraft operating manuals for specific engagement weight and speed criteria based on aircraft structural restrictions and arresting system limitations.

Following is a list of current systems referenced in this publication identified by both Air Force and Navy terminology:

BI-DIRECTIONAL CABLE (B)

<u>TYPE</u>	<u>DESCRIPTION</u>
BAK-9	Rotary friction brake.
BAK-12A	Standard BAK-12 with 950 foot run out, 1-inch cable and 40,000 pound weight setting. Rotary friction brake.
BAK-12B	Extended BAK-12 with 1200 foot run, 1¼ inch Cable and 50,000 pounds weight setting. Rotary friction brake.
E28	Rotary Hydraulic (Water Brake).
M21	Rotary Hydraulic (Water Brake) Mobile.

The following device is used in conjunction with some aircraft arresting systems:

BAK-14	A device that raises a hook cable out of a slot in the runway surface and is remotely positioned for engagement by the tower on request. (In addition to personnel reaction time, the system requires up to five seconds to fully raise the cable.)
H	A device that raises a hook cable out of a slot in the runway surface and is remotely positioned for engagement by the tower on request. (In addition to personnel reaction time, the system requires up to one and one-half seconds to fully raise the cable.)

UNI-DIRECTIONAL CABLE

<u>TYPE</u>	<u>DESCRIPTION</u>
MB60	Textile brake—an emergency one-time use, modular braking system employing the tearing of specially woven textile straps to absorb the kinetic energy.
E5/E5-1/E5-3	Chain Type. At USN/USMC stations E-5 A-GEAR systems are rated, e.g., E-5 RATING-13R-1100 HW (DRY), 31L/R-1200 STD (WET). This rating is a function of the A-GEAR chain weight and length and is used to determine the maximum aircraft engaging speed. A dry rating applies to a stabilized surface (dry or wet) while a wet rating takes into account the amount (if any) of wet overrun that is not capable of withstanding the aircraft weight. These ratings are published under Service/Military/A-Gear in the entry.

FOREIGN CABLE

<u>TYPE</u>	<u>DESCRIPTION</u>	<u>US EQUIVALENT</u>
44B-3H	Rotary Hydraulic (Water Brake)	
CHAG	Chain	E-5

UNI-DIRECTIONAL BARRIER

<u>TYPE</u>	<u>DESCRIPTION</u>
MA-1A	Web barrier between stanchions attached to a chain energy absorber.
BAK-15	Web barrier between stanchions attached to an energy absorber (water squeezer, rotary friction, chain). Designed for wing engagement.

NOTE: Landing short of the runway threshold on a runway with a BAK-15 in the underrun is a significant hazard. The barrier in the down position still protrudes several inches above the underrun. Aircraft contact with the barrier short of the runway

threshold can cause damage to the barrier and substantial damage to the aircraft.

OTHER

TYPE

DESCRIPTION

EMAS

Engineered Material Arresting System, located beyond the departure end of the runway, consisting of high energy absorbing materials which will crush under the weight of an aircraft.

23 SERVICE

SERVICING—CIVIL

- S1: Minor airframe repairs.
- S2: Minor airframe and minor powerplant repairs.
- S3: Major airframe and minor powerplant repairs.
- S4: Major airframe and major powerplant repairs.
- S5: Major airframe repairs.
- S6: Minor airframe and major powerplant repairs.
- S7: Major powerplant repairs.
- S8: Minor powerplant repairs.

FUEL

CODE	FUEL	CODE	FUEL
80	Grade 80 gasoline (Red)	B	Jet B, Wide-cut, turbine fuel without FS-II*, FP** minus 50° C.
100	Grade 100 gasoline (Green)	B+	Jet B, Wide-cut, turbine fuel with FS-II*, FP** minus 50° C
100LL	100LL gasoline (low lead) (Blue)	J4 (JP4)	(JP-4 military specification) FP** minus 58° C.
115	Grade 115 gasoline (115/145 military specification) (Purple)	J5 (JP5)	(JP-5 military specification) Kerosene with FS-II, FP** minus 46°C.
A	Jet A, Kerosene, without FS-II*, FP** minus 40° C.	J8 (JP8)	(JP-8 military specification) Jet A-1, Kerosene with FS-II*, CI/LI#, SDA##, FP** minus 47°C.
A+	Jet A, Kerosene, with FS-II*, FP** minus 40°C.	J8+100	(JP-8 military specification) Jet A-1, Kerosene with FS-II*, CI/LI#, SDA##, FP** minus 47°C, with +100 fuel additive that improves thermal stability characteristics of kerosene jet fuels.
A++	Jet A, Kerosene, with FS-II*, CI/LI#, SDA##, FP** minus 40°C.	J	(Jet Fuel Type Unknown)
A++100	Jet A, Kerosene, with FS-II*, CI/LI#, SDA##, FP** minus 40°C, with +100 fuel additive that improves thermal stability characteristics of kerosene jet fuels.	MOGAS	Automobile gasoline which is to be used as aircraft fuel.
A1	Jet A-1, Kerosene, without FS-II*, FP** minus 47°C.	UL91	Unleaded Grade 91 gasoline
A1+	Jet A-1, Kerosene with FS-II*, FP** minus 47° C.	UL94	Unleaded Grade 94 gasoline

* (Fuel System Icing Inhibitor) ** (Freeze Point) # (Corrosion Inhibitors/Lubricity Improvers) ## (Static Dissipator Additive)

NOTE: Certain automobile gasoline may be used in specific aircraft engines if a FAA supplemental type certificate has been obtained. Automobile gasoline, which is to be used in aircraft engines, will be identified as "MOGAS", however, the grade/type and other octane rating will not be published.

Data shown on fuel availability represents the most recent information the publisher has been able to acquire. Because of a variety of factors, the fuel listed may not always be obtainable by transient civil pilots. Confirmation of availability of fuel should be made directly with fuel suppliers at locations where refueling is planned.

OXYGEN—CIVIL

- OX 1 High Pressure
- OX 2 Low Pressure
- OX 3 High Pressure—Replacement Bottles
- OX 4 Low Pressure—Replacement Bottles

SERVICE—MILITARY

Specific military services available at the airport are listed under this general heading. Remarks applicable to any military service are shown in the individual service listing.

JET AIRCRAFT STARTING UNITS (JASU)—MILITARY

The numeral preceding the type of unit indicates the number of units available. The absence of the numeral indicates ten or more units available. If the number of units is unknown, the number one will be shown. Absence of JASU designation indicates non-availability.

The following is a list of current JASU systems referenced in this publication:

USAF JASU (For variations in technical data, refer to T.O. 35-1-7.)

ELECTRICAL STARTING UNITS:

AM32A-86	AC: 115/200v, 3 phase, 90 kva, 0.8 pf, 4 wire DC: 28v, 1500 amp, 72 kw (with TR pack)
MC-1A	AC: 115/208v, 400 cycle, 3 phase, 37.5 kva, 0.8 pf, 108 amp, 4 wire DC: 28v, 500 amp, 14 kw
MD-3	AC: 115/208v, 400 cycle, 3 phase, 60 kva, 0.75 pf, 4 wire DC: 28v, 1500 amp, 45 kw, split bus
MD-3A	AC: 115/208v, 400 cycle, 3 phase, 60 kva, 0.75 pf, 4 wire DC: 28v, 1500 amp, 45 kw, split bus

AIRPORT/FACILITY DIRECTORY LEGEND

21

MD-3M	AC: 115/208v, 400 cycle, 3 phase, 60 kva, 0.75 pf, 4 wire DC: 28v, 500 amp, 15 kw
MD-4	AC: 120/208v, 400 cycle, 3 phase, 62.5 kva, 0.8 pf, 175 amp, "WYE" neutral ground, 4 wire, 120v, 400 cycle, 3 phase, 62.5 kva, 0.8 pf, 303 amp, "DELTA" 3 wire, 120v, 400 cycle, 1 phase, 62.5 kva, 0.8 pf, 520 amp, 2 wire

AIR STARTING UNITS

AM32-95	150 +/- 5 lb/min (2055 +/- 68 cfm) at 51 +/- 2 psia
AM32A-95	150 +/- 5 lb/min @ 49 +/- 2 psia (35 +/- 2 psig)
LASS	150 +/- 5 lb/min @ 49 +/- 2 psia
MA-1A	82 lb/min (1123 cfm) at 130° air inlet temp, 45 psia (min) air outlet press
MC-1	15 cfm, 3500 psia
MC-1A	15 cfm, 3500 psia
MC-2A	15 cfm, 200 psia
MC-11	8,000 cu in cap, 4000 psig, 15 cfm

COMBINED AIR AND ELECTRICAL STARTING UNITS:

AGPU	AC: 115/200v, 400 cycle, 3 phase, 30 kw gen DC: 28v, 700 amp AIR: 60 lb/min @ 40 psig @ sea level
AM32A-60*	AIR: 120 +/- 4 lb/min (1644 +/- 55 cfm) at 49 +/- 2 psia AC: 120/208v, 400 cycle, 3 phase, 75 kva, 0.75 pf, 4 wire, 120v, 1 phase, 25 kva DC: 28v, 500 amp, 15 kw
AM32A-60A	AIR: 150 +/- 5 lb/min (2055 +/- 68 cfm) at 51 +/- 2 psia AC: 120/208v, 400 cycle, 3 phase, 75 kva, 0.75 pf, 4 wire DC: 28v, 200 amp, 5.6 kw
AM32A-60B*	AIR: 130 lb/min, 50 psia AC: 120/208v, 400 cycle, 3 phase, 75 kva, 0.75 pf, 4 wire DC: 28v, 200 amp, 5.6 kw

*NOTE: During combined air and electrical loads, the pneumatic circuitry takes preference and will limit the amount of electrical power available.

USN JASU

ELECTRICAL STARTING UNITS:

NC-8A/A1	DC: 500 amp constant, 750 amp intermittent, 28v; AC: 60 kva @ .8 pf, 115/200v, 3 phase, 400 Hz.
NC-10A/A1/B/C	DC: 750 amp constant, 1000 amp intermittent, 28v; AC: 90 kva, 115/200v, 3 phase, 400 Hz.

AIR STARTING UNITS:

GTC-85/GTE-85	120 lbs/min @ 45 psi.
MSU-200NAV/A/U47A-5	204 lbs/min @ 56 psia.
WELLS AIR START SYSTEM	180 lbs/min @ 75 psi or 120 lbs/min @ 45 psi. Simultaneous multiple start capability.

COMBINED AIR AND ELECTRICAL STARTING UNITS:

NCPP-105/RCPT	180 lbs/min @ 75 psi or 120 lbs/min @ 45 psi. 700 amp, 28v DC. 120/208v, 400 Hz AC, 30 kva.
---------------	---

ARMY JASU

59B2-1B	28v, 7.5 kw, 280 amp.
---------	-----------------------

OTHER JASU

ELECTRICAL STARTING UNITS (DND):

CE12	AC 115/200v, 140 kva, 400 Hz, 3 phase
CE13	AC 115/200v, 60 kva, 400 Hz, 3 phase
CE14	AC/DC 115/200v, 140 kva, 400 Hz, 3 phase, 28vDC, 1500 amp
CE15	DC 22-35v, 500 amp continuous 1100 amp intermittent
CE16	DC 22-35v, 500 amp continuous 1100 amp intermittent soft start

AIR STARTING UNITS (DND):

CA2	ASA 45.5 psig, 116.4 lb/min
-----	-----------------------------

COMBINED AIR AND ELECTRICAL STARTING UNITS (DND)

CEA1	AC 120/208v, 60 kva, 400 Hz, 3 phase DC 28v, 75 amp AIR 112.5 lb/min, 47 psig
------	--

ELECTRICAL STARTING UNITS (OTHER)

C-26	28v 45kw 115-200v 15kw 380-800 Hz 1 phase 2 wire
C-26-B, C-26-C	28v 45kw: Split Bus: 115-200v 15kw 380-800 Hz 1 phase 2 wire
E3	DC 28v/10kw

AIR STARTING UNITS (OTHER):

A4	40 psi/2 lb/sec (LPAS Mk12, Mk12L, Mk12A, Mk1, Mk2B)
----	--

MA-1	150 Air HP, 115 lb/min 50 psia
MA-2	250 Air HP, 150 lb/min 75 psia
CARTRIDGE:	
MXU-4A	USAF

FUEL—MILITARY

Fuel available through US Military Base supply, DESC Into-Plane Contracts and/or reciprocal agreement is listed first and is followed by (Mil). At commercial airports where Into-Plane contracts are in place, the name of the refueling agent is shown. Military fuel should be used first if it is available. When military fuel cannot be obtained but Into-Plane contract fuel is available, Government aircraft must refuel with the contract fuel and applicable refueling agent to avoid any breach in contract terms and conditions. Fuel not available through the above is shown preceded by NC (no contract). When fuel is obtained from NC sources, local purchase procedures must be followed. The US Military Aircraft Identaplates DD Form 1896 (Jet Fuel), DD Form 1897 (Avgas) and AF Form 1245 (Avgas) are used at military installations only. The US Government Aviation Into-Plane Reimbursement (AIR) Card (currently issued by AVCARD) is the instrument to be used to obtain fuel under a DESC Into-Plane Contract and for NC purchases if the refueling agent at the commercial airport accepts the AVCARD. A current list of contract fuel locations is available online at https://cis.energy.dla.mil/ip_cis/. See legend item 14 for fuel code and description.

SUPPORTING FLUIDS AND SYSTEMS—MILITARY**CODE**

ADI	Anti-Detonation Injection Fluid—Reciprocating Engine Aircraft.
W	Water Thrust Augmentation—Jet Aircraft.
WAI	Water-Alcohol Injection Type, Thrust Augmentation—Jet Aircraft.
SP	Single Point Refueling.
PRESAIR	Air Compressors rated 3,000 PSI or more.
De-Ice	Anti-icing/De-icing/Defrosting Fluid (MIL-A-8243).

OXYGEN:

LPOX	Low pressure oxygen servicing.
HPOX	High pressure oxygen servicing.
LHOX	Low and high pressure oxygen servicing.
LOX	Liquid oxygen servicing.
OXRB	Oxygen replacement bottles. (Maintained primarily at Naval stations for use in acft where oxygen can be replenished only by replacement of cylinders.)
OX	Indicates oxygen servicing when type of servicing is unknown.

NOTE: Combinations of above items is used to indicate complete oxygen servicing available;

LHOXRB	Low and high pressure oxygen servicing and replacement bottles;
LPOXRB	Low pressure oxygen replacement bottles only, etc.

NOTE: Aircraft will be serviced with oxygen procured under military specifications only. Aircraft will not be serviced with medical oxygen.

NITROGEN:

LPNIT	Low pressure nitrogen servicing.
HPNIT	High pressure nitrogen servicing.
LHNIT	Low and high pressure nitrogen servicing.

OIL—MILITARY

US AVIATION OILS (MIL SPECS):

<u>CODE</u>	<u>GRADE, TYPE</u>
O-113	1065, Reciprocating Engine Oil (MIL-L-6082)
O-117	1100, Reciprocating Engine Oil (MIL-L-6082)
O-117+	1100, O-117 plus cyclohexanone (MIL-L-6082)
O-123	1065, (Dispersant), Reciprocating Engine Oil (MIL-L-22851 Type III)
O-128	1100, (Dispersant), Reciprocating Engine Oil (MIL-L-22851 Type II)
O-132	1005, Jet Engine Oil (MIL-L-6081)
O-133	1010, Jet Engine Oil (MIL-L-6081)
O-147	None, MIL-L-6085A Lubricating Oil, Instrument, Synthetic
O-148	None, MIL-L-7808 (Synthetic Base) Turbine Engine Oil
O-149	None, Aircraft Turbine Engine Synthetic, 7.5c St
O-155	None, MIL-L-6086C, Aircraft, Medium Grade
O-156	None, MIL-L-23699 (Synthetic Base), Turboprop and Turboshaft Engines
JOAP/SOAP	Joint Oil Analysis Program. JOAP support is furnished during normal duty hours, other times on request. (JOAP and SOAP programs provide essentially the same service, JOAP is now the standard joint service supported program.)

TRANSIENT ALERT (TRAN ALERT)—MILITARY

Tran Alert service is considered to include all services required for normal aircraft turn-around, e.g., servicing (fuel, oil, oxygen, etc.), debriefing to determine requirements for maintenance, minor maintenance, inspection and parking assistance of transient aircraft. Drag chute repack, specialized maintenance, or extensive repairs will be provided within the capabilities and priorities of the base. Delays can be anticipated after normal duty hours/holidays/weekends regardless of the hours of transient maintenance operation. Pilots should not expect aircraft to be serviced for TURN-AROUNDS during time periods when servicing or maintenance manpower

is not available. In the case of airports not operated exclusively by US military, the servicing indicated by the remarks will not always be available for US military aircraft. When transient alert services are not shown, facilities are unknown. NO PRIORITY BASIS—means that transient alert services will be provided only after all the requirements for mission/tactical assigned aircraft have been accomplished.

24 NOISE

Remarks that indicate noise information and/or abatement measures that exist in the vicinity of the airport.

25 AIRPORT REMARKS

The Attendance Schedule is the months, days and hours the airport is actually attended. Airport attendance does not mean watchman duties or telephone accessibility, but rather an attendant or operator on duty to provide at least minimum services (e.g., repairs, fuel, transportation).

Airport Remarks have been grouped in order of applicability. Airport remarks are limited to those items of information that are determined essential for operational use, i.e., conditions of a permanent or indefinite nature and conditions that will remain in effect for more than 30 days concerning aeronautical facilities, services, maintenance available, procedures or hazards, knowledge of which is essential for safe and efficient operation of aircraft. Information concerning permanent closing of a runway or taxiway will not be shown. A note "See Special Notices" shall be applied within this remarks section when a special notice applicable to the entry is contained in the Special Notices section of this publication.

Parachute Jumping indicates parachute jumping areas associated with the airport. See Parachute Jumping Area section of this publication for additional information.

Landing Fee indicates landing charges for private or non-revenue producing aircraft. In addition, fees may be charged for planes that remain over a couple of hours and buy no services, or at major airline terminals for all aircraft.

Note: Unless otherwise stated, remarks including runway ends refer to the runway's approach end.

26 MILITARY REMARKS

Joint Civil/Military airports contain both Airport Remarks and Military Remarks. Military Remarks published for these airports are applicable only to the military. Military and joint Military/Civil airports contain only Military Remarks. Remarks contained in this section may not be applicable to civil users. When both sets of remarks exist, the first set is applicable to the primary operator of the airport. Remarks applicable to a tenant on the airport are shown preceded by the tenant organization, i.e., (A) (AF) (N) (ANG), etc. Military airports operate 24 hours unless otherwise specified. Airport operating hours are listed first (airport operating hours will only be listed if they are different than the airport attended hours or if the attended hours are unavailable) followed by pertinent remarks in order of applicability. Remarks will include information on restrictions, hazards, traffic pattern, noise abatement, customs/agriculture/immigration, and miscellaneous information applicable to the Military.

Type of restrictions:

CLOSED: When designated closed, the airport is restricted from use by all aircraft unless stated otherwise. Any closure applying to specific type of aircraft or operation will be so stated. USN/USMC/USAF airports are considered closed during non-operating hours. Closed airports may be utilized during an emergency provided there is a safe landing area.

OFFICIAL BUSINESS ONLY: The airfield is closed to all transient military aircraft for obtaining routine services such as fueling, passenger drop off or pickup, practice approaches, parking, etc. The airfield may be used by aircrews and aircraft if official government business (including civilian) must be conducted on or near the airfield and prior permission is received from the airfield manager.

AF OFFICIAL BUSINESS ONLY OR NAVY OFFICIAL BUSINESS ONLY: Indicates that the restriction applies only to service indicated.

PRIOR PERMISSION REQUIRED (PPR): Airport is closed to transient aircraft unless approval for operation is obtained from the appropriate commander through Chief, Airfield Management or Airfield Operations Officer. Official Business or PPR does not preclude the use of US Military airports as an alternate for IFR flights. If a non-US military airport is used as a weather alternate and requires a PPR, the PPR must be requested and confirmed before the flight departs. The purpose of PPR is to control volume and flow of traffic rather than to prohibit it. Prior permission is required for all aircraft requiring transient alert service outside the published transient alert duty hours. All aircraft carrying hazardous materials must obtain prior permission as outlined in AFJ1 11-204, AR 95-27, OPNAVINST 3710.7.

Note: OFFICIAL BUSINESS ONLY AND PPR restrictions are not applicable to Special Air Mission (SAM) or Special Air Resource (SPAR) aircraft providing person or persons on board are designated Code 6 or higher as explained in AFJMAN 11-213, AR 95-11, OPNAVINST 3722-8J. Official Business Only or PPR do not preclude the use of the airport as an alternate for IFR flights.

27 AIRPORT MANAGER

The phone number of the airport manager.

28 WEATHER DATA SOURCES

Weather data sources will be listed alphabetically followed by their assigned frequencies and/or telephone number and hours of operation.

ASOS—Automated Surface Observing System. Reports the same as an AWOS-3 plus precipitation identification and intensity, and freezing rain occurrence;

AWOS—Automated Weather Observing System

AWOS-A—reports altimeter setting (all other information is advisory only).

AWOS-AV—reports altimeter and visibility.

AWOS-1—reports altimeter setting, wind data and usually temperature, dew point and density altitude.

AWOS-2—reports the same as AWOS-1 plus visibility.

AWOS-3—reports the same as AWOS-1 plus visibility and cloud/ceiling data.

AWOS-3P reports the same as the AWOS-3 system, plus a precipitation identification sensor.

AWOS-3PT reports the same as the AWOS-3 system, plus precipitation identification sensor and a thunderstorm/lightning reporting capability.

AWOS-3T reports the same as AWOS-3 system and includes a thunderstorm/lightning reporting capability.

See AIM, Basic Flight Information and ATC Procedures for detailed description of Weather Data Sources.

AWOS-4—reports same as AWOS-3 system, plus precipitation occurrence, type and accumulation, freezing rain, thunderstorm and runway surface sensors.

LAWRS—Limited Aviation Weather Reporting Station where observers report cloud height, weather, obstructions to vision, temperature and dewpoint (in most cases), surface wind, altimeter and pertinent remarks.

LLWAS—indicates a Low Level Wind Shear Alert System consisting of a center field and several field perimeter anemometers.

SAWRS—identifies airports that have a Supplemental Aviation Weather Reporting Station available to pilots for current weather information.

SWSL—Supplemental Weather Service Location providing current local weather information via radio and telephone.

TDWR—indicates airports that have Terminal Doppler Weather Radar.

WSP—indicates airports that have Weather System Processor.

When the automated weather source is broadcast over an associated airport NAVAID frequency (see NAVAID line), it shall be indicated by a bold ASOS or AWOS followed by the frequency, identifier and phone number, if available.

29 COMMUNICATIONS

Airport terminal control facilities and radio communications associated with the airport shall be shown. When the call sign is not the same as the airport name the call sign will be shown. Frequencies shall normally be shown in ascending order with the primary frequency listed first. Frequencies will be listed, together with sectorization indicated by outbound radials, and hours of operation. Communications will be listed in sequence as follows:

Single Frequency Approach (SFA), Common Traffic Advisory Frequency (CTAF), Aeronautical Advisory Stations (UNICOM) or (AUNICOM), and Automatic Terminal Information Service (ATIS) along with their frequencies are shown, where available, on the line following the heading "COMMUNICATIONS." When the CTAF and UNICOM frequencies are the same, the frequency will be shown as CTAF/UNICOM 122.8.

Frequencies available for Flight Service Station (FSS) facilities will follow in descending order. Remote Communications Outlet (RCO) providing service to the airport followed by the frequency and FSS RADIO name will be shown when available. In Alaska, Airport Advisory Service (AAS) is provided on the CTAF by FSS for select non-tower airports or airports where the tower is not in operation. (See AIM, Para 4-1-9 Traffic Advisory Practices at Airports Without Operating Control Towers or AC 90-66B, "Non-Towered Airport Flight Operations.")

Remote Communications Outlet (RCO)—An unmanned air/ground communications facility that is remotely controlled and provides UHF or VHF communications capability to extend the service range of an FSS.

Civil Communications Frequencies—Civil communications frequencies used in the FSS air/ground system are operated on 122.2,

123.6; emergency 121.5; plus receive-only on 122.1.

- a. 122.2 is assigned as a common en route frequency.
- b. In Alaska, 123.6 is assigned as the airport advisory frequency at select non-tower locations. At airports with a tower, FSS may provide airport advisories on the tower frequency when tower is closed.
- c. 122.1 is the primary receive-only frequency at VORs.
- d. Some FSSs are assigned 50 kHz frequencies in the 122–126 MHz band (e.g., 122.45). Pilots using the FSS A/G system should refer to this directory or appropriate charts to determine frequencies available at the FSS or remotized facility through which they wish to communicate.

Emergency frequency 121.5 and 243.0 are available at FSSs in Alaska, most Towers, Approach Control and RADAR facilities. Frequencies published followed by the letter “T” or “R”, indicate that the facility will only transmit or receive respectively on that frequency. All radio aids to navigation (NAVAID) frequencies are transmit only. In cases where communications frequencies are annotated with (R) or (E), (R) indicates Radar Capability and (E) indicates Emergency Frequency.

TERMINAL SERVICES

SFA—Single Frequency Approach.

CTAF—A program designed to get all vehicles and aircraft at airports without an operating control tower on a common frequency.

ATIS—A continuous broadcast of recorded non-control information in selected terminal areas.

D-ATIS—Digital ATIS provides ATIS information in text form outside the standard reception range of conventional ATIS via landline & data link communications and voice message within range of existing transmitters.

AUNICOM—Automated UNICOM is a computerized, command response system that provides automated weather, radio check capability and airport advisory information selected from an automated menu by microphone clicks.

UNICOM—A non-government air/ground radio communications facility which may provide airport information.

PTD—Pilot to Dispatcher.

APP CON—Approach Control. The symbol **Ⓡ** indicates radar approach control.

TOWER—Control tower.

GCA—Ground Control Approach System.

GND CON—Ground Control.

GCO—Ground Communication Outlet—An unstaffed, remotely controlled, ground/ground communications facility. Pilots at uncontrolled airports may contact ATC and FSS via VHF to a telephone connection to obtain an instrument clearance or close a VFR or IFR flight plan. They may also get an updated weather briefing prior to takeoff. Pilots will use four “key clicks” on the VHF radio to contact the appropriate ATC facility or six “key clicks” to contact the FSS. The GCO system is intended to be used only on the ground.

DEP CON—Departure Control. The symbol **Ⓡ** indicates radar departure control.

CLNC DEL—Clearance Delivery.

CPDLC—Controller Pilot Data Link Communication. FANS ATC data communication capability from the aircraft to the ATC Data Link system.

PRE TAXI CLNC—Pre taxi clearance.

VFR ADVSY SVC—VFR Advisory Service. Service provided by Non-Radar Approach Control. Advisory Service for VFR aircraft (upon a workload basis) ctc APP CON.

COMD POST—Command Post followed by the operator call sign in parenthesis.

PMSV—Pilot-to-Metro Service call sign, frequency and hours of operation, when full service is other than continuous. PMSV installations at which weather observation service is available shall be indicated, following the frequency and/or hours of operation as “Wx obsn svc 1900-0000Z±” or “other times” may be used when no specific time is given. PMSV facilities manned by forecasters are considered “Full Service”. PMSV facilities manned by weather observers are listed as “Limited Service”.

OPS—Operations followed by the operator call sign in parenthesis.

CON

RANGE

FLT FLW—Flight Following

MEDIVAC

NOTE: Communication frequencies followed by the letter “X” indicate frequency available on request.

30 AIRSPACE

Information concerning Class B, C, and part-time D and E surface area airspace shall be published with effective times, if available.

CLASS B—Radar Sequencing and Separation Service for all aircraft in CLASS B airspace.

CLASS C—Separation between IFR and VFR aircraft and sequencing of VFR arrivals to the primary airport.

TRSA—Radar Sequencing and Separation Service for participating VFR Aircraft within a Terminal Radar Service Area.

Class C, D, and E airspace described in this publication is that airspace usually consisting of a 5 NM radius core surface area that begins at the surface and extends upward to an altitude above the airport elevation (charted in MSL for Class C and Class D). Class E surface airspace normally extends from the surface up to but not including the overlying controlled airspace.

When part-time Class C or Class D airspace defaults to Class E, the core surface area becomes Class E. This will be formatted as: **AIRSPACE: CLASS C** svc “times” ctc **APP CON** other times CLASS E:

or

AIRSPACE: CLASS D svc “times” other times CLASS E.

When a part-time Class C, Class D or Class E surface area defaults to Class G, the core surface area becomes Class G up to, but not including, the overlying controlled airspace. Normally, the overlying controlled airspace is Class E airspace beginning at either 700’ or 1200’ AGL and may be determined by consulting the relevant VFR Sectional or Terminal Area Charts. This will be formatted as:

AIRSPACE: CLASS C svc “times” ctc **APP CON** other times CLASS G, with CLASS E 700’ (or 1200’) AGL & abv:

or

AIRSPACE: CLASS D svc “times” other times CLASS G with CLASS E 700’ (or 1200’) AGL & abv:

or

AIRSPACE: CLASS E svc “times” other times CLASS G with CLASS E 700’ (or 1200’) AGL & abv.

NOTE: AIRSPACE SVC “TIMES” INCLUDE ALL ASSOCIATED ARRIVAL EXTENSIONS. Surface area arrival extensions for instrument approach procedures become part of the primary core surface area. These extensions may be either Class D or Class E airspace and are effective concurrent with the times of the primary core surface area. For example, when a part-time Class C, Class D or Class E surface area defaults to Class G, the associated arrival extensions will default to Class G at the same time. When a part-time Class C or Class D surface area defaults to Class E, the arrival extensions will remain in effect as Class E airspace.

NOTE: CLASS E AIRSPACE EXTENDING UPWARD FROM 700 FEET OR MORE ABOVE THE SURFACE, DESIGNATED IN CONJUNCTION WITH AN AIRPORT WITH AN APPROVED INSTRUMENT PROCEDURE.

Class E 700’ AGL (shown as magenta vignette on sectional charts) and 1200’ AGL (blue vignette) areas are designated when necessary to provide controlled airspace for transitioning to/from the terminal and enroute environments. Unless otherwise specified, these 700’/1200’ AGL Class E airspace areas remain in effect continuously, regardless of airport operating hours or surface area status. These transition areas should not be confused with surface areas or arrival extensions.

(See Chapter 3, AIRSPACE, in the Aeronautical Information Manual for further details)


31 VOR TEST FACILITY (VOT)

The VOT transmits a signal which provided users a convenient means to determine the operational status and accuracy of an aircraft VOR receiver while on the ground. Ground based VOTs and the associated frequency shall be shown when available. VOTs are also shown with identifier, frequency and referenced remarks in the VOR Receiver Check section in the back of this publication.

RADIO AIDS TO NAVIGATION

The Airport/Facility Directory section of the Chart Supplement lists, by facility name, all Radio Aids to Navigation that appear on FAA, Aeronautical Information Services Visual or IFR Aeronautical Charts and those upon which the FAA has approved an Instrument Approach Procedure, with exception of selected TACANS. All VOR, VORTAC, TACAN and ILS equipment in the National Airspace System has an automatic monitoring and shutdown feature in the event of malfunction. Unmonitored, as used in this publication, for any navigational aid, means that monitoring personnel cannot observe the malfunction or shutdown signal. The NAVAID NOTAM file identifier will be shown as “NOTAM FILE IAD” and will be listed on the Radio Aids to Navigation line. When two or more NAVAIDS are listed and the NOTAM file identifier is different from that shown on the Radio Aids to Navigation line, it will be shown with the NAVAID listing. NOTAM file identifiers for ILSs and its components (e.g., NDB (LOM) are the same as the associated airports and are not repeated. Automated Surface Observing System (ASOS) and Automated Weather Observing System (AWOS) will be shown when this service is broadcast over selected NAVAIDS.

NAVAID information is tabulated as indicated in the following sample:

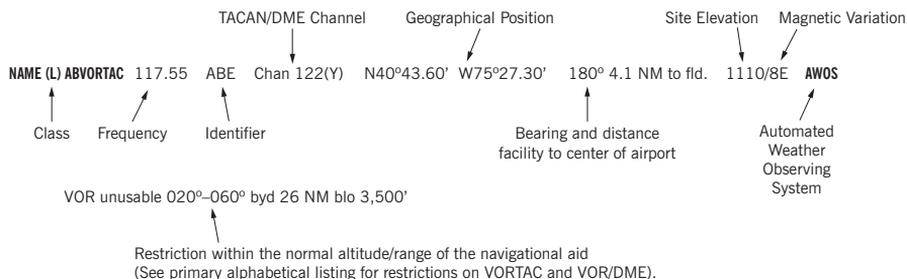

Note: Those DME channel numbers with a (Y) suffix require TACAN to be placed in the "Y" mode to receive distance information.

ASR/PAR—Indicates that Surveillance (ASR) or Precision (PAR) radar instrument approach minimums are published in the U.S. Terminal Procedures. Only part-time hours of operation will be shown.

RADIO CLASS DESIGNATIONS

VOR/DME/TACAN Standard Service Volume (SSV) Classifications

SSV Class	Altitudes	Distance (NM)
(T) Terminal	1000' to 12,000'	25
(L) Low Altitude	1000' to 18,000'	40
(H) High Altitude	1000' to 14,500'	40
	14,500' to 18,000'	100
	18,000' to 45,000'	130
	45,000' to 60,000'	100

NOTE: Additionally, (H) facilities provide (L) and (T) service volume and (L) facilities provide (T) service. Altitudes are with respect to the station's site elevation. Coverage is not available in a cone of airspace directly above the facility.

The term VOR is, operationally, a general term covering the VHF omnidirectional bearing type of facility without regard to the fact that the power, the frequency protected service volume, the equipment configuration, and operational requirements may vary between facilities at different locations.

AB _____	Automatic Weather Broadcast.
DF _____	Direction Finding Service.
DME _____	UHF standard (TACAN compatible) distance measuring equipment.
DME(Y) _____	UHF standard (TACAN compatible) distance measuring equipment that require TACAN to be placed in the "Y" mode to receive DME.
GS _____	Glide slope.
H _____	Non-directional radio beacon (homing), power 50 watts to less than 2,000 watts (50 NM at all altitudes).
HH _____	Non-directional radio beacon (homing), power 2,000 watts or more (75 NM at all altitudes).
H-SAB _____	Non-directional radio beacons providing automatic transcribed weather service.
ILS _____	Instrument Landing System (voice, where available, on localizer channel).
IM _____	Inner marker.
LDA _____	Localizer Directional Aid.
LMM _____	Compass locator station when installed at middle marker site (15 NM at all altitudes).
LOM _____	Compass locator station when installed at outer marker site (15 NM at all altitudes).
MH _____	Non-directional radio beacon (homing) power less than 50 watts (25 NM at all altitudes).
MM _____	Middle marker.
OM _____	Outer marker.
S _____	Simultaneous range homing signal and/or voice.
SABH _____	Non-directional radio beacon not authorized for IFR or ATC. Provides automatic weather broadcasts.
SDF _____	Simplified Direction Facility.
TACAN _____	UHF navigational facility—omnidirectional course and distance information.
VOR _____	VHF navigational facility—omnidirectional course only.
VOR/DME _____	Collocated VOR navigational facility and UHF standard distance measuring equipment.
VORTAC _____	Collocated VOR and TACAN navigational facilities.
W _____	Without voice on radio facility frequency.
Z _____	VHF station location marker at a LF radio facility.

AIRPORT/FACILITY DIRECTORY LEGEND

ILS FACILITY PERFORMANCE CLASSIFICATION CODES

Codes define the ability of an ILS to support autoland operations. The two portions of the code represent Official Category and farthest point along a Category I, II, or III approach that the Localizer meets Category III structure tolerances.

Official Category: I, II, or III; the lowest minima on published or unpublished procedures supported by the ILS.

Farthest point of satisfactory Category III Localizer performance for Category I, II, or III approaches: A – 4 NM prior to runway threshold, B – 3500 ft prior to runway threshold, C – glide angle dependent but generally 750–1000 ft prior to threshold, T – runway threshold, D – 3000 ft after runway threshold, and E – 2000 ft prior to stop end of runway.

ILS information is tabulated as indicated in the following sample:

ILS/DME 108.5 I-ORL Chan 22 Rwy 18. Class IIE. LOM HERNY NDB.

ILS Facility Performance
Classification Code

FREQUENCY PAIRING TABLE

VHF FREQUENCY	TACAN CHANNEL						
108.10	18X	108.55	22Y	111.05	47Y	114.85	95Y
108.30	20X	108.65	23Y	111.15	48Y	114.95	96Y
108.50	22X	108.75	24Y	111.25	49Y	115.05	97Y
108.70	24X	108.85	25Y	111.35	50Y	115.15	98Y
108.90	26X	108.95	26Y	111.45	51Y	115.25	99Y
109.10	28X	109.05	27Y	111.55	52Y	115.35	100Y
109.30	30X	109.15	28Y	111.65	53Y	115.45	101Y
109.50	32X	109.25	29Y	111.75	54Y	115.55	102Y
109.70	34X	109.35	30Y	111.85	55Y	115.65	103Y
109.90	36X	109.45	31Y	111.95	56Y	115.75	104Y
110.10	38X	109.55	32Y	113.35	80Y	115.85	105Y
110.30	40X	109.65	33Y	113.45	81Y	115.95	106Y
110.50	42X	109.75	34Y	113.55	82Y	116.05	107Y
110.70	44X	109.85	35Y	113.65	83Y	116.15	108Y
110.90	46X	109.95	36Y	113.75	84Y	116.25	109Y
111.10	48X	110.05	37Y	113.85	85Y	116.35	110Y
111.30	50X	110.15	38Y	113.95	86Y	116.45	111Y
111.50	52X	110.25	39Y	114.05	87Y	116.55	112Y
111.70	54X	110.35	40Y	114.15	88Y	116.65	113Y
111.90	56X	110.45	41Y	114.25	89Y	116.75	114Y
108.05	17Y	110.55	42Y	114.35	90Y	116.85	115Y
108.15	18Y	110.65	43Y	114.45	91Y	116.95	116Y
108.25	19Y	110.75	44Y	114.55	92Y	117.05	117Y
108.35	20Y	110.85	45Y	114.65	93Y	117.15	118Y
108.45	21Y	110.95	46Y	114.75	94Y	117.25	119Y

FREQUENCY PAIRING TABLE

The following is a list of paired VOR/ILS VHF frequencies with TACAN channels.

TACAN CHANNEL	VHF FREQUENCY						
2X	134.5	25X	108.80	36X	109.90	47X	111.00
2Y	134.55	25Y	108.85	36Y	109.95	47Y	111.05
11X	135.4	26X	108.90	37X	110.00	48X	111.10
11Y	135.45	26Y	108.95	37Y	110.05	48Y	111.15
12X	135.5	27X	109.00	38X	110.10	49X	111.20
12Y	135.55	27Y	109.05	38Y	110.15	49Y	111.25
17X	108.00	28X	109.10	39X	110.20	50X	111.30
17Y	108.05	28Y	109.15	39Y	110.25	50Y	111.35
18X	108.10	29X	109.20	40X	110.30	51X	111.40
18Y	108.15	29Y	109.25	40Y	110.35	51Y	111.45
19X	108.20	30X	109.30	41X	110.40	52X	111.50
19Y	108.25	30Y	109.35	41Y	110.45	52Y	111.55
20X	108.30	31X	109.40	42X	110.50	53X	111.60
20Y	108.35	31Y	109.45	42Y	110.55	53Y	111.65
21X	108.40	32X	109.50	43X	110.60	54X	111.70
21Y	108.45	32Y	109.55	43Y	110.65	54Y	111.75
22X	108.50	33X	109.60	44X	110.70	55X	111.80
22Y	108.55	33Y	109.65	44Y	110.75	55Y	111.85
23X	108.60	34X	109.70	45X	110.80	56X	111.90
23Y	108.65	34Y	109.75	45Y	110.85	56Y	111.95
24X	108.70	35X	109.80	46X	110.90	57X	112.00
24Y	108.75	35Y	109.85	46Y	110.95	57Y	112.05

TACAN CHANNEL	VHF FREQUENCY						
58X	112.10	77X	113.00	96X	114.90	115X	116.80
58Y	112.15	77Y	113.05	96Y	114.95	115Y	116.85
59X	112.20	78X	113.10	97X	115.00	116X	116.90
59Y	112.25	78Y	113.15	97Y	115.05	116Y	116.95
60X	133.30	79X	113.20	98X	115.10	117X	117.00
60Y	133.35	79Y	113.25	98Y	115.15	117Y	117.05
61X	133.40	80X	113.30	99X	115.20	118X	117.10
61Y	133.45	80Y	113.35	99Y	115.25	118Y	117.15
62X	133.50	81X	113.40	100X	115.30	119X	117.20
62Y	133.55	81Y	113.45	100Y	115.35	119Y	117.25
63X	133.60	82X	113.50	101X	115.40	120X	117.30
63Y	133.65	82Y	113.55	101Y	115.45	120Y	117.35
64X	133.70	83X	113.60	102X	115.50	121X	117.40
64Y	133.75	83Y	113.65	102Y	115.55	121Y	117.45
65X	133.80	84X	113.70	103X	115.60	122X	117.50
65Y	133.85	84Y	113.75	103Y	115.65	122Y	117.55
66X	133.90	85X	113.80	104X	115.70	123X	117.60
66Y	133.95	85Y	113.85	104Y	115.75	123Y	117.65
67X	134.00	86X	113.90	105X	115.80	124X	117.70
67Y	134.05	86Y	113.95	105Y	115.85	124Y	117.75
68X	134.10	87X	114.00	106X	115.90	125X	117.80
68Y	134.15	87Y	114.05	106Y	115.95	125Y	117.85
69X	134.20	88X	114.10	107X	116.00	126X	117.90
69Y	134.25	88Y	114.15	107Y	116.05	126Y	117.95
70X	112.30	89X	114.20	108X	116.10		
70Y	112.35	89Y	114.25	108Y	116.15		
71X	112.40	90X	114.30	109X	116.20		
71Y	112.45	90Y	114.35	109Y	116.25		
72X	112.50	91X	114.40	110X	116.30		
72Y	112.55	91Y	114.45	110Y	116.35		
73X	112.60	92X	114.50	111X	116.40		
73Y	112.65	92Y	114.55	111Y	116.45		
74X	112.70	93X	114.60	112X	116.50		
74Y	112.75	93Y	114.65	112Y	116.55		
75X	112.80	94X	114.70	113X	116.60		
75Y	112.85	94Y	114.75	113Y	116.65		
76X	112.90	95X	114.80	114X	116.70		
76Y	112.95	95Y	114.85	114Y	116.75		

33 COMM/NAV/WEATHER REMARKS: These remarks consist of pertinent information affecting the current status of communications, NAVAIDs, weather, and in the absence of air-ground radio outlets identified in the Communications section some approach control facilities will have a clearance delivery phone number listed here.