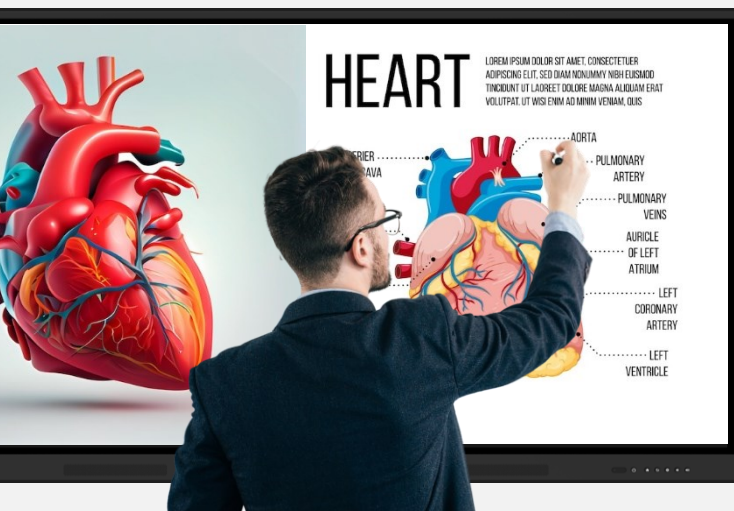# OPS PC Module

For Interactive Flat Panels & Signage Panels

Empower your display with Solitaire OPS, seamlessly integrating powerful computing capabilities into your setup for enhanced efficiency and performance

Solitaire OPS comes with advanced "Digital Canvas" Interactive Whiteboard Software Suite for FREE

Digital Canvas Preloaded

Digital Canvas is an advanced interactive whiteboard software suite for education and corporate training. This software supports whiteboard functions such as writing, erasing, annotating, drawing, geometrical tools, auto shape recognition, handwriting recognition and gesture support on IWB/IFP. Furthermore, the flat panel's interactive multimedia functions, such as subject-specific tools and multimedia playback, enable enhanced interactive teaching and demonstration experiences.

www.solitairetech.in

Toll free No.: 1800-571-6767

Solitaire OPSPC i7000

Intel Core i7 12th Generation OPS Computer Module

Features

- ◆ 12th Gen Intel® i7 CPU
- ◆ SO-DIMM DDR4 ,Supports dual memory， MAX 64GB
- ◆ HDD/SSD ,Supports dual Storage
- ◆ I*JAE 80pin
- ◆ 1 x RTL8111H 10/100/1000M（RJ45）， 1 x WiFI
- ◆ I/O：6 x USB3.0I x LINE-OUT & MIC-IN
- ◆ Size: 180mm (L) x 195mm (W) x 30mm (H)
- ◆ Supports hardware one click restore
- ◆ Power supply：19V/4.74A

Parameters

Processor System	CPU	Intel ®Core I7 1255U Series Processor, TDP, Max 55W, 1.7GHZ, Max 4.7GHZ
	Chipset	Hm67x
	Bios	AMI 64mbit, Support Writeprotect, Diskless Booting, Wake On LAN, Auto-on, Timing Startup, Watchdog, Intelligent Device Identification And Other Functions
Memory	Type	So-dimm 16g Ddr4， max 64g
Storage	Type	512g SSD, m.2 / Sata
Display	Chipset	CPU Integrated Intel® Iris® Xe Graphics Eligible
	Output	HDMI/DP， Double Display (Synchronous/ Asynchronous Display) 1×DP (Max Resolution: 4096 x 2160@ 60hz) 1 ×HDMI (Max Resolution: 4096 x 2160 60hz)
Network	Lan IC	1 × Rtl8111h 10/100/1000m（RJ45）
	Wifi	1 × WIFI (NGFF), (Support 802.11ac/A/B/G/N；Bluetooth Version4.2）
IO Interface	**Front Panel**	6 × Usb3.0, 1*type-c
		1 × Power Button, 1 × One key Button
		1 X MIC IN, 1 X Line Out
	Rear Panel	1 X JAE 80pin, 1 X HDMI
Power	Power Input	DC 19V / 4.74A, (12~19V DC IN）
Size		180mm (±0.5%)L X 195mm (±0.5%)W X 30mm (±0.5%)h
Environment	Operating Temp	0°c ~50°c
	Storage Temp	-20~70℃
	Operating Humidity	5%~90% Relative Humidity, No Condensation