

solitaire[®]



PTK 208

**Smart tracking gesture
controlled 4K PTZ camera
with HDMI**

Step into the future of meetings with Solitaire PTK 208 - the ultimate hi-tech companion. This auto-tracking PTZ camera with gesture control ensures you're always in the spotlight. Redefine virtual presence with precision, elegance, and control. Elevate your meetings with Solitaire PTK 208, the epitome of hi-tech sophistication in video conferencing ecosystem.





PTK 208

Smart tracking gesture controlled 4K PTZ camera with HDMI

PTK 208



Begin Tracking



Zoom In



Zoom out



Stop Tracking



10x Optical zoom



Look face tracking



4K
30fps



4 mic
Array



HDMI



Pan: ±170°
Tilt: -30°+90°




PTK208

Key Features

- ✓ 8.3 million pixels, 1/2.8"HD color CMOS Sony sensor
- ✓ 4K/30fps, 1080P/30fps, 720@30fps
- ✓ AI interaction, multi-gesture control motion tracking & voice tracking
- ✓ 4 Digital Microphones Array and 10 meters voice pickup
- ✓ Adopt AEC (Acoustic Echo Cancellation), ANS (Active Noise Suppression) & AGC (Automatic Gain Control) technology
- ✓ 10x Optical zoom
- ✓ with Type-C, HDMI interface
- ✓ Built-in 3.5mm line audio output & Mic in function, support external speaker out
- ✓ With IR remote controller & Menu available




MULTI-WAYS OF PLACEMENT

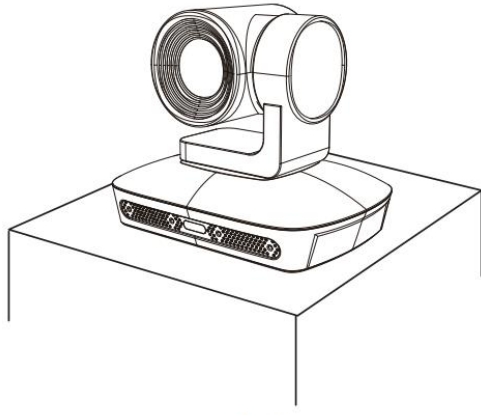


(a)

Put on Top of Desktop

Put on a tripod
(Tripod is not including in the package)

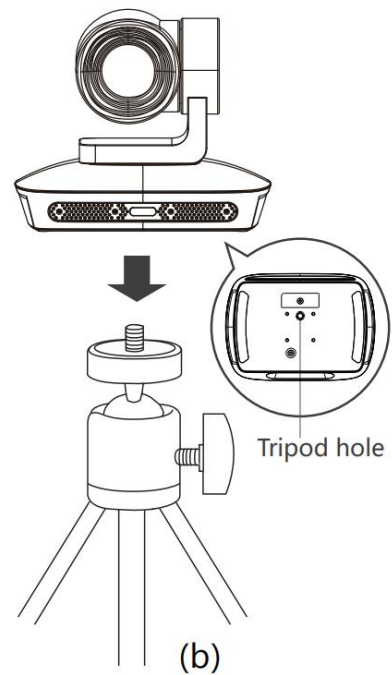



(b)

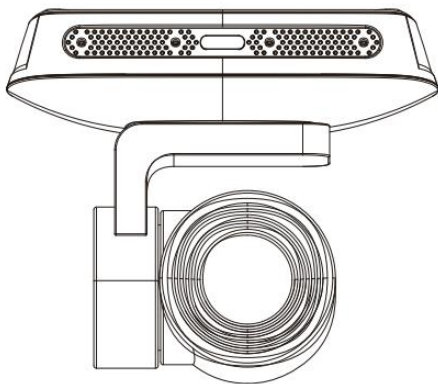


(c)

Ceiling Installation
Product bracket, and install the corresponding screws (optional)

PACKAGING CONTENT:

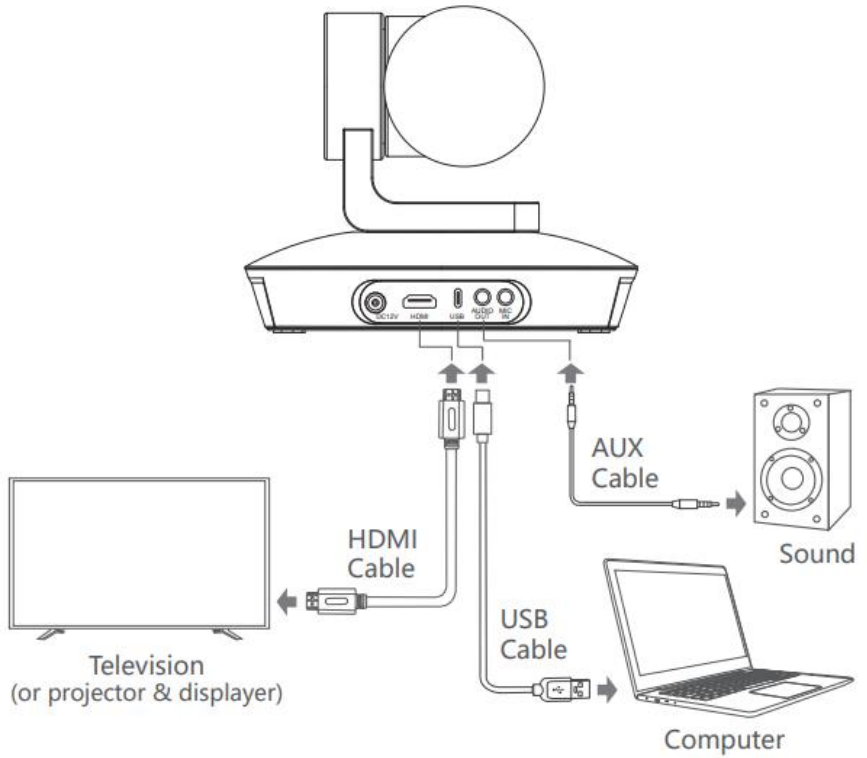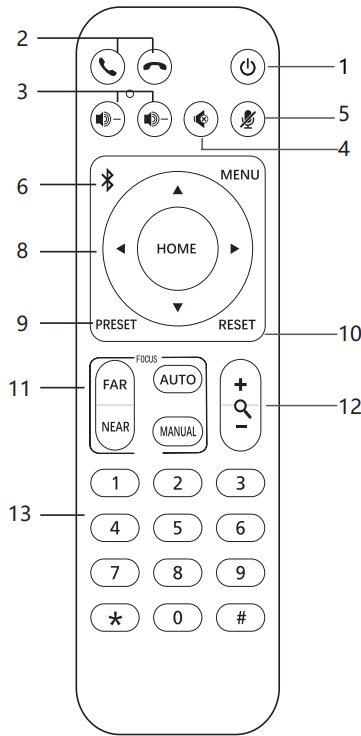

PTZ Camera x 1



Power Adapter x 1



Remote Controller x 1



Use manual x 1

PRODUCT SPECIFICATION: PTK 208 PTZ CAMERA

Camera, Lens Parameters	Image Sensor	4k 1/2.8 inch CMOS sony sensor
	Min Lux	0.1Lux (F1.2)
	Effective Pixel	8.3 MP
	Zoom	10X Optical
	Shutter Speed	1 to 1/ 10000s
	Focal Lens	2.8mm Fixed / f=5.1mm-51.0mm,
	Horizontal Field of View	61.5°~7°
	Frame Rate	3840*2160,1920×1080,1280×720, 640×480
	Focus mode	Auto
	Aperture Mode	Auto
	Backlight Compensation	Support
	Wide Dynamic	Support
Picture Adjustment	Brightness, Chroma, Saturation, Contrast, Acut	
Microphone Parameters	MIC Array Quantity	4
	MIC Array Form	linear
	Microphone Spacing	45.8mm
	Sampling Rate	16KHz/ 48KHz
	Sensitivity	-29dBfs
	Far-field Pick up Voice Distance	0-10meters
	Horizontal Voice Pick up Angle	Horizontal 180°
	SNR	65.5dB
Interface Parameter	Communication Mode	Full duplex
	Video Interface	USB2.0, HDMI
	Video Compressed Format	YUY2/ H2.64/ H2.65/ MJPEG
PTZ Parameter	Control interface	USB2.0, UVC
	Pan Rotation	-170°~ +173°
	Tilt rotation	-30°~ +90°
	Horizontal Rotate Speed	0.1~100°/ second
Other Parameters	Vertical Rotate Speed	0.1~80°/ second
	Power Adapter	DC12V/2A
	Decoder	Built In
	Input voltage	DC12V
	Power consumption	12W (MAX)
	Storage Temperature and Humidity	-10°C ~ +60°C / 20% ~ 95%
	Working temperature and humidity	-10°C ~ +50°C / 20% ~ 80%
	Operating Environment	Indoor
	Present	1~10
Size	160.7*115.1*131.4mm	
Weight	600g	

Disclaimer: Due to product configuration and manufacturing process, actual body size/body weight may vary, please refer to the actual product. The product images in this specification are for illustrative purposes only, may be adjusted and revised in order to match the actual product performance and specifications. In the event that such changes and adjustments are necessary, no special notice will be given. The actual product effect (including but not limited to appearance, colour and size) may vary slightly. Please refer to the actual product. In order to provide accurate specifications as far as possible, the text expressions and pictures in this specification may be adjusted and revised in real time. The product specification

Contact us:

SUPERTRON ELECTRONICS PRIVATE LIMITED

2, Cooper Lane, Mission Row Extension, Kolkata 700001

Phone No.: +91-33-40371000, +91-120-4291882

WhatsApp: +91-9818778982, +91 78275 46802

Email: Solitaire.IFPD@supertronindia.com

Website: www.supertronindia.com

