



NCH8 Modular AC Contactor

1. General

1.1 Electric ratings: up to 20A, 25A, 40A, 63A, 230V, AC50/60Hz;

1.2 Utilization category: AC-1, AC-7a, AC-7b;

1.3 Standard: IEC/EN 61095

2. Features

2.1 Compact design and modularization design;

2.2 Insulation material with excellent performances has been adopted to enhance the operation security to a great extent;

2.3 Elegant appearance. A mounting instruction diagram is appended for convenient operation;

2.4 No noise during operation.

D

3. Technical data

3.1 Ratings

Model	Utilization category	Ui (V)	Ue (V~)	Conventional heating current (A)	Ie (A)	Controlled power (kW)
NCH8-20	AC-1,AC-7a	500	230	20	20	4
NCH8-20	AC-7b	500	230	20	9	1.2
NCH8-25	AC-1,AC-7a	500	400	25	25	16
NCH8-40	AC-1,AC-7a	500	400	40	40	40
NCH8-63	AC-1,AC-7a	500	400	63	63	40

3.2 Making and breaking capacity

Model	Utilization category	Making and breaking conditions			Electrification time (s)	Interval time (s)	Operating cycle times
		Ic/Ie	Ur/Ue	COS φ			
NCH8-20	AC-1,AC-7a	1.5	1.05	0.8	0.05	10	50
NCH8-20	AC-7b	8	1.05	0.45	0.05	10	50
NCH8-25	AC-1,AC-7a	1.5	1.05	0.8	0.05	10	50
NCH8-40	AC-1,AC-7a	1.5	1.05	0.8	0.05	10	50
NCH8-63	AC-1,AC-7a	1.5	1.05	0.8	0.05	10	50

3.3 Conventional Operating Performances

3.3.1 Conventional operating performances of NCH8-20~25

Utilization category	Making conditions			Breaking conditions			Electrification time (s)	Interval time (s)	Operating frequency
	I/Ie	U/Ue	COS φ	Ic/Ie	Ur/Ue	COS φ			
AC-1	1.0	1.05	0.8	1.0	1.05	0.8	0.05	10	6000
AC-7a	1.0	1.05	0.8	1.0	1.05	0.8	0.05	10	30000
AC-7b	6.0	1.0	0.45	1.0	0.17	0.45	0.05	10	30000

3.3.2 Conventional operating performances of NCH8-40~63

Utilization category	Making and breaking conditions			Electrification time (s)	Interval time (s)	Operating frequency
	Ic/Ie	Ur/Ue	COS φ			
AC-1	1.0	1.05	0.8	0.05	10	6000
AC-7a	1.0	1.05	0.8	0.05	10	30000

3.4 Conventional heating current under different ambient temperature

Rated current	40℃	50℃	60℃	70℃
Ie=20A	20A	18A	16A	14A
Ie=25A	25A	22A	18A	16A
Ie=40A	40A	38A	36A	32A
Ie=63A	63A	57A	50A	46A

3.5 Number of appended lamps with voltage up to 230V

Unit power	Tungsten filament and halogen 230V					
	60W	100W	200W	300W	500W	1000W
20A	20	12	6	4	2	1
25A	36	20	11	7	4	2
40A	85	50	25	17	10	5
63A	115	70	35	23	14	7

4. Overall and mounting dimensions (mm)



Model	D		L	L1	L2	H	H1	H2
	2P	4P						
NCH8-20~25	18	36	85	35.5	45	65.5	60	44
NCH8-40~36	36	54	85	35.5	45	65.5	60	44

5. Ordering information

Model	Number of contact	Coil voltage	CTN	Order code	
				Standard	RoHS
NCH8-20	2NO	230V 50Hz	128	153000	981874
NCH8-20	2NO	24V 50Hz	128	153001	981875
NCH8-20	1NO+1NC	220/230V	128	153002	981876
NCH8-20	1NO+1NC	24V 50Hz	128	153003	981877
NCH8-20	2NC	220/230V	128	153020	981878
NCH8-20	2NC	24V 50Hz	128	-	986779
NCH8-20	4NO	220/230V	96	-	986780
NCH8-20	4NO	24V 50Hz	96	-	986781
NCH8-20	2NO+2NC	220/230V	96	-	986782
NCH8-20	2NO+2NC	24V 50Hz	96	-	986783
NCH8-25	4NO	220/230V	96	-	986784
NCH8-25	4NO	24V 50Hz	96	-	986785
NCH8-25	2NO+2NC	220/230V	96	-	986786
NCH8-25	2NO+2NC	24V 50Hz	96	-	986787
NCH8-40	4NO	230V	64	153004	981879
NCH8-40	4NO	24V	64	153005	981880
NCH8-40*	2NO+2NC	230V	64	153006	981881
NCH8-40*	2NO+2NC	24V	64	153007	981882
NCH8-40	2NO	230V	64	153008	981883
NCH8-40	2NO	24V	64	153009	981884
NCH8-40	1NO+1NC	230V	64	153010	981885
NCH8-40	1NO+1NC	24V	64	153011	981886
NCH8-40*	3NO+1NC	220/230V	64	-	986788
NCH8-40*	4NC	220/230V	64	-	986789
NCH8-63	4NO	230V 50Hz	64	153012	981887
NCH8-63	4NO	24V 50Hz	64	153013	981888
NCH8-63*	2NO+2NC	230V 50Hz	64	153014	981889
NCH8-63*	2NO+2NC	24V 50Hz	64	153015	981890
NCH8-63	2NO	230V 50Hz	64	153016	981891
NCH8-63	2NO	24V 50Hz	64	153017	981892
NCH8-63	1NO+1NC	230V50Hz	64	153018	981893
NCH8-63	1NO+1NC	24V 50Hz	64	153019	981894
NCH8-63*	3NO+1NC	220/230V	64	-	986790
NCH8-63*	4NC	220/230V	64	-	986791

Note: "*" means the product is not available during current development

C E R T I F I C A T E



of Conformity
Low Voltage Directive 2006/95/EC

Registration No.: AN 50236007 0001

Report No.: 15055703 001

Holder: Zhejiang Chint Electrics Co., Ltd.
No.1,
Chint Road, Chint Industrial Zone,
North Baixiang
Yueqing, Zhejiang Province 325603
P.R. China

Product: Magnetic Contactor
(Electromechanical Contactor for Household and Similar Purposes)

Identification: Type Designation: NCH8-20/20 NCH8-20/11 NCH8-20/02
NCH8-20/22 NCH8-20/40 NCH8-25/22
NCH8-25/40 NCH8-40/11 NCH8-40/20
NCH8-40/40 NCH8-63/11 NCH8-63/20
NCH8-63/40

Standard : EN 61095: 2009

Serial No. : Engineering sample

Remark: Refer to test report 15055703.001 for details.

This certificate of conformity is based on an evaluation of a sample of the above mentioned product. Technical Report and documentation are at the Licence Holder's disposal. This is to certify that the tested sample is in conformity with all revision of Annex I of Council Directive 2006/95/EC, in its latest amended version, referred to as the Low Voltage Directive. This certificate does not imply assessment of the series-production of the product and does not permit the use of a TÜV Rheinland mark of conformity. The holder of the certificate is authorized to use this certificate in connection with the EC declaration of conformity according to Annex III of the Directive.

Certification Body



Dipl.-Ing. (FH) E. En. He

Date 16.10.2012


TÜV Rheinland LGA Products GmbH - Tillystraße 2 - 90431 Nürnberg

CE The CE marking may be used if all relevant and effective EC Directives are complied with. CE

Report Number: 15055703 001
Model: NCH8-20/... 2 pole






NCH8-20/... 2 pole contactors

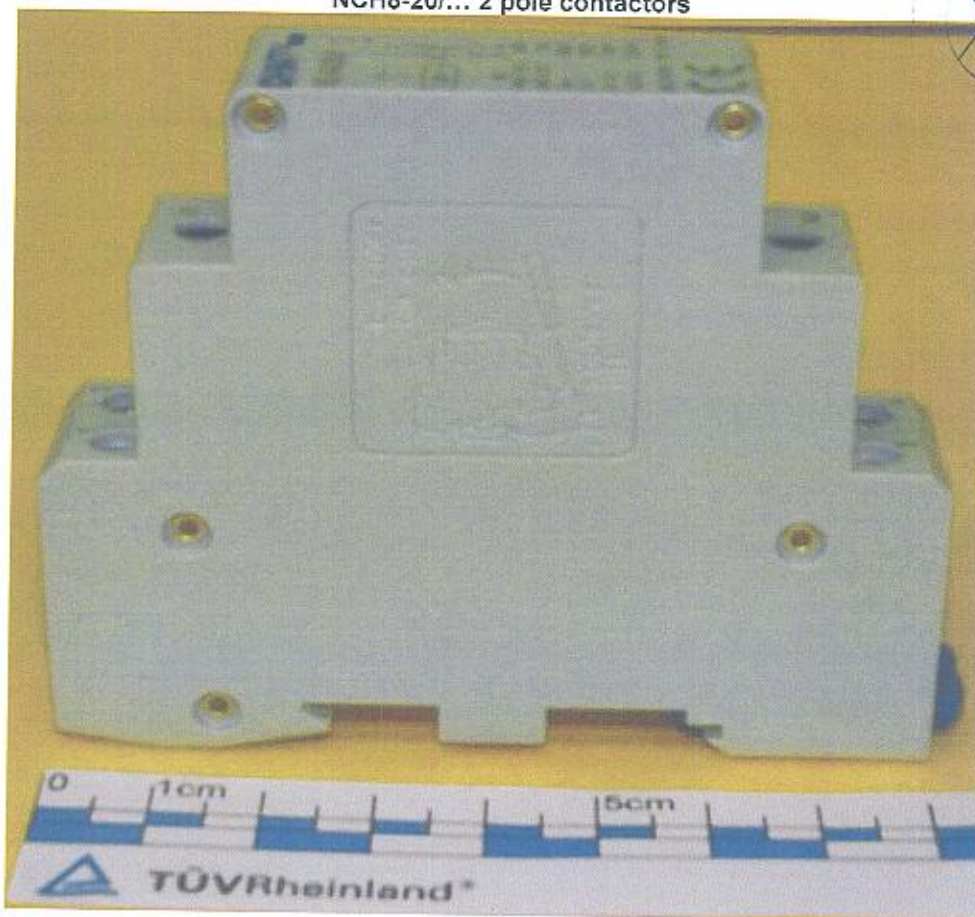


NCH8-20/20

Report Number: 15055703 001
Model: NCH8-20/... 2 pole

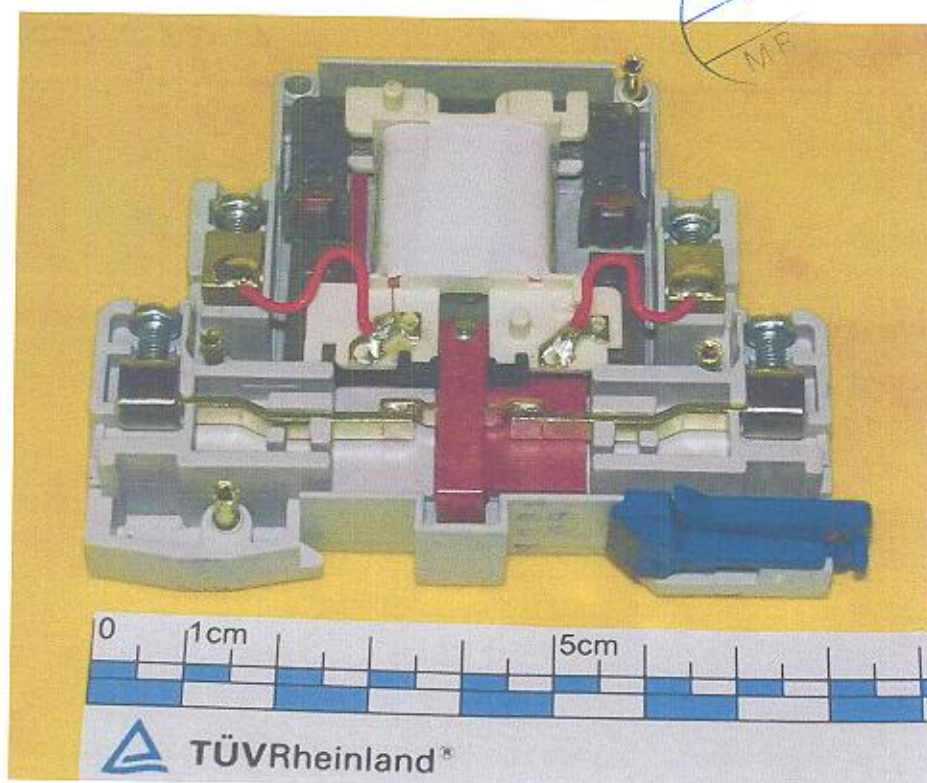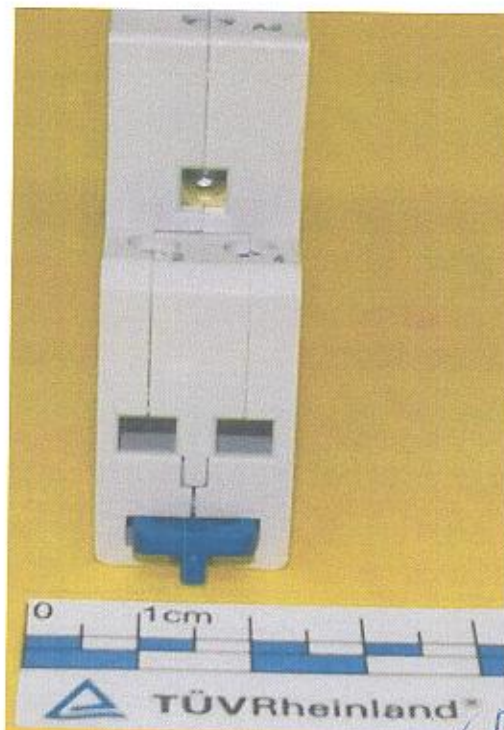

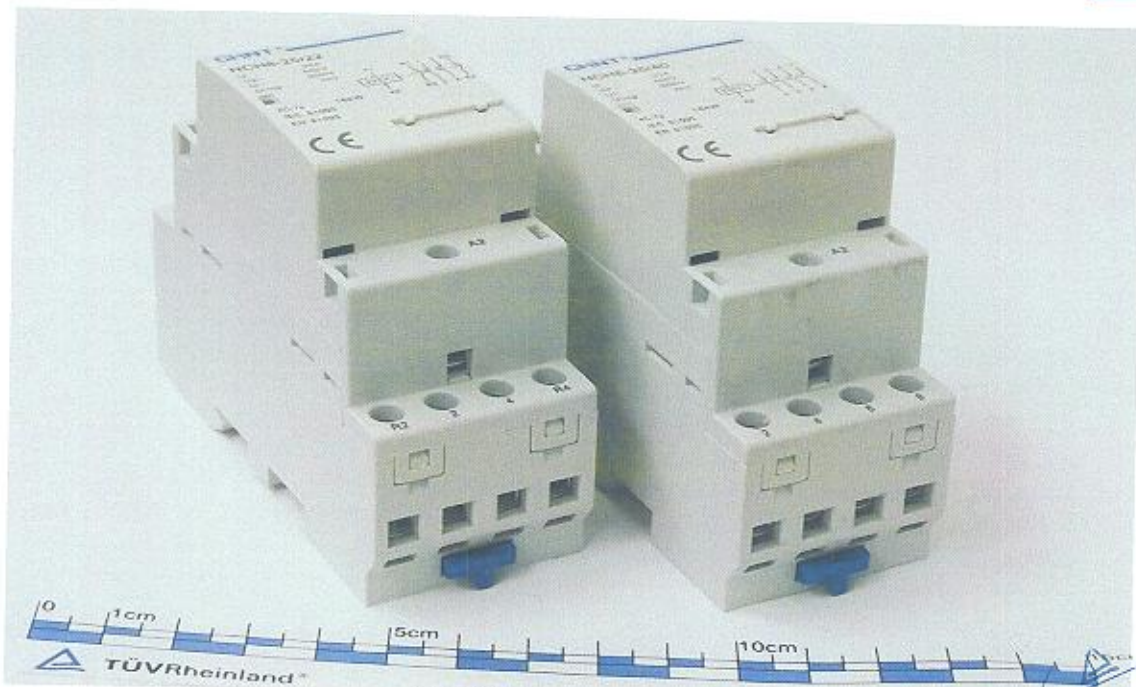

NCH8-25/22 and NCH8-25/40

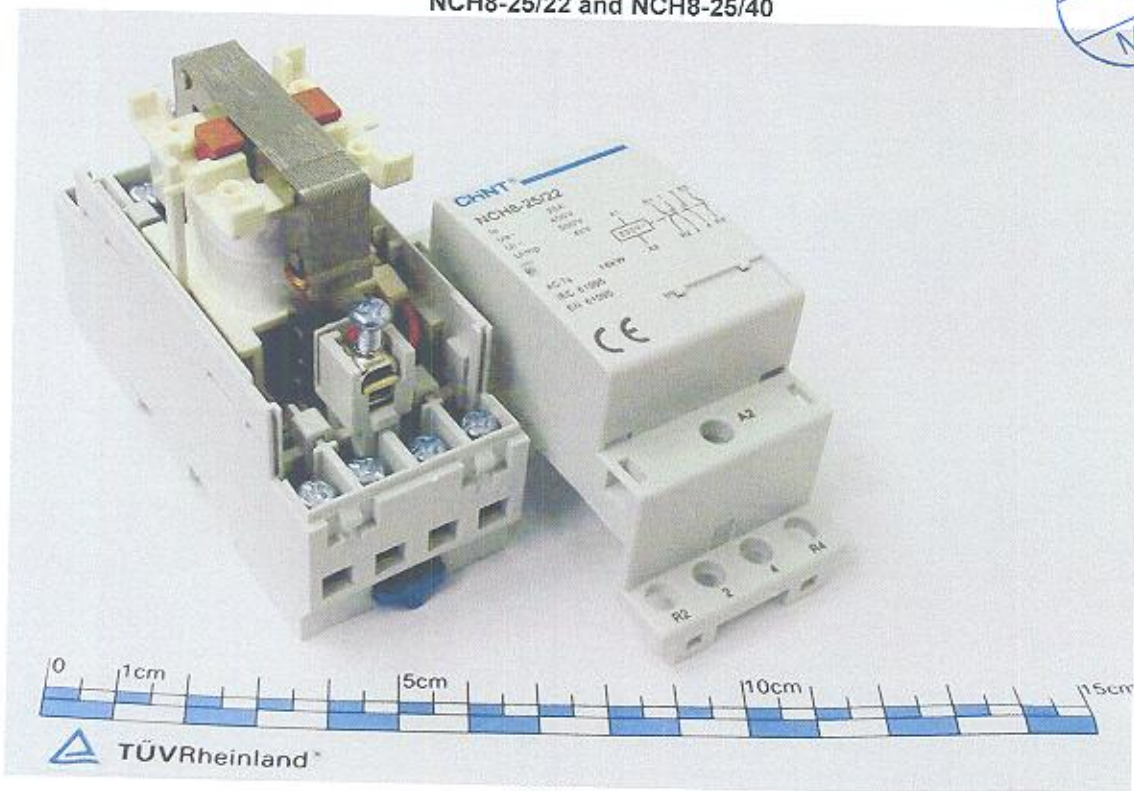


NCH8-25/22

Report Number: 15055703 001

Model: NCH8-40/11, NCH8-40/20 and NCH8-40/40




NCH8-40/11, NCH8-40/20 and NCH8-40/40

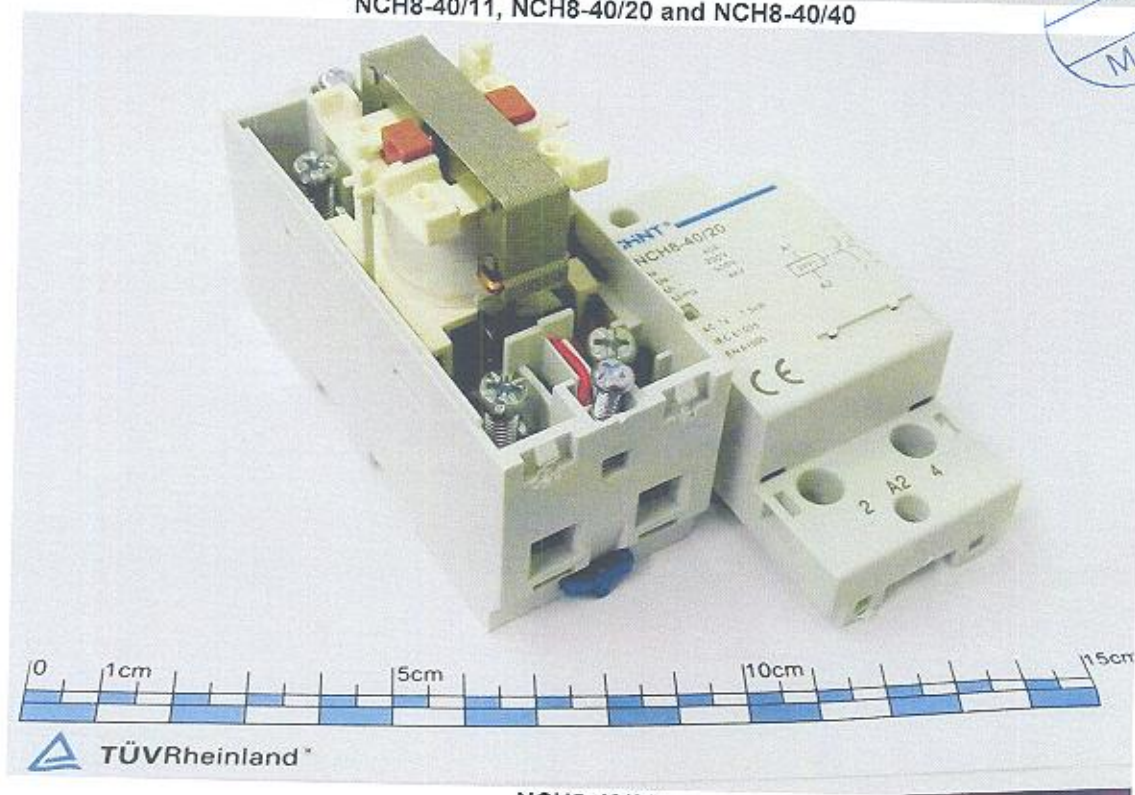

NCH8-40/20


Report Number: 15055703 001

Model: NCH8-40/11, NCH8-40/20 and NCH8-40/40

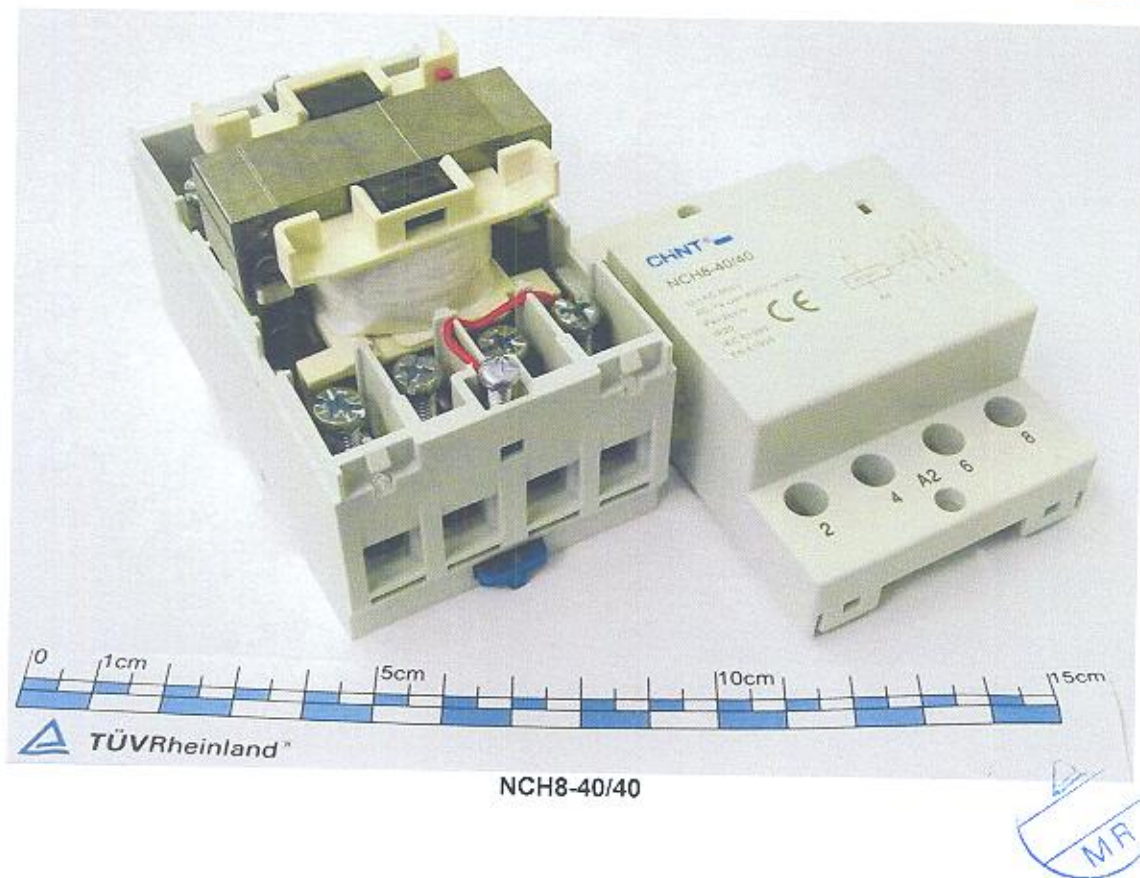


Report Number: 15055703 001

Model: NCH8-63/11, NCH8-63/20 and NCH8-63/40

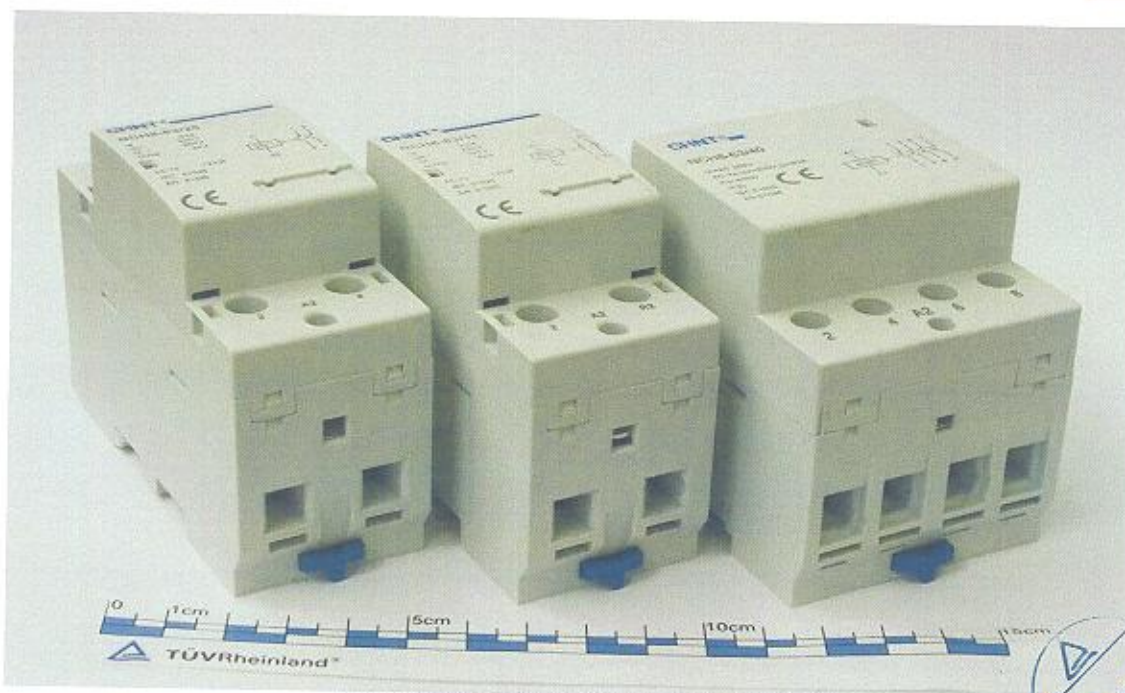


NCH8-63/11, NCH8-63/20 and NCH8-63/40

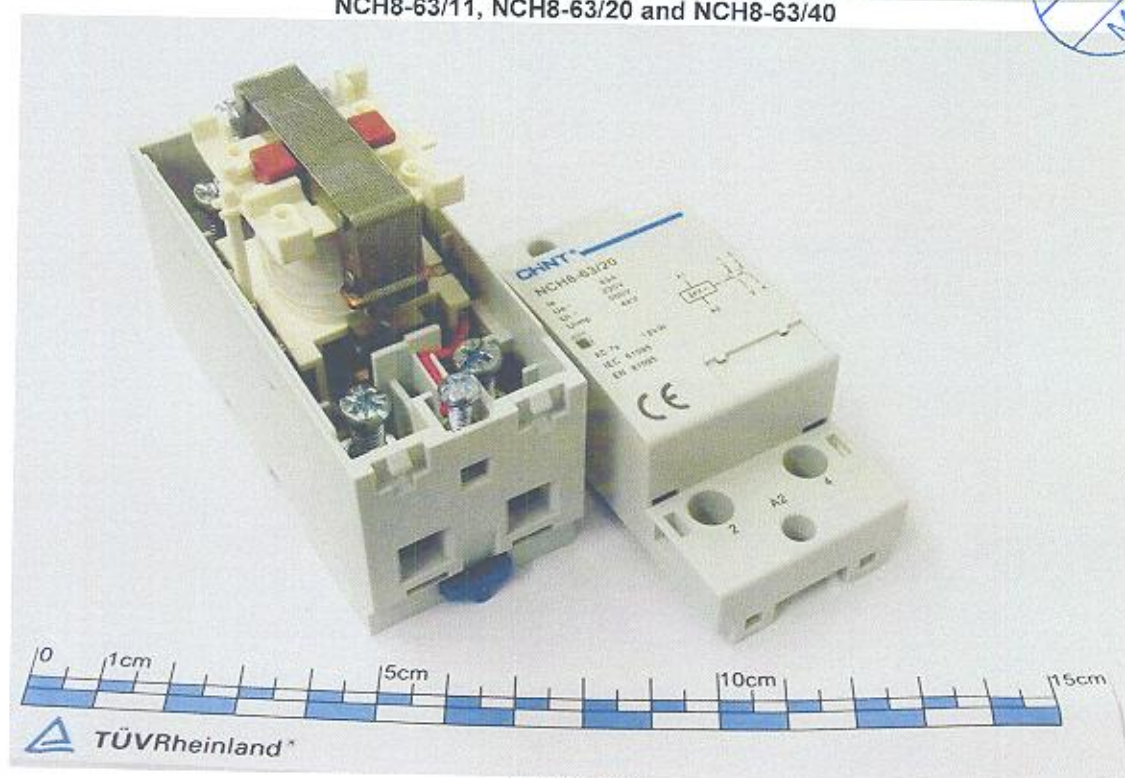


NCH8-63/20


Report Number: 15055703 001

Model: NCH8-63/11, NCH8-63/20 and NCH8-63/40

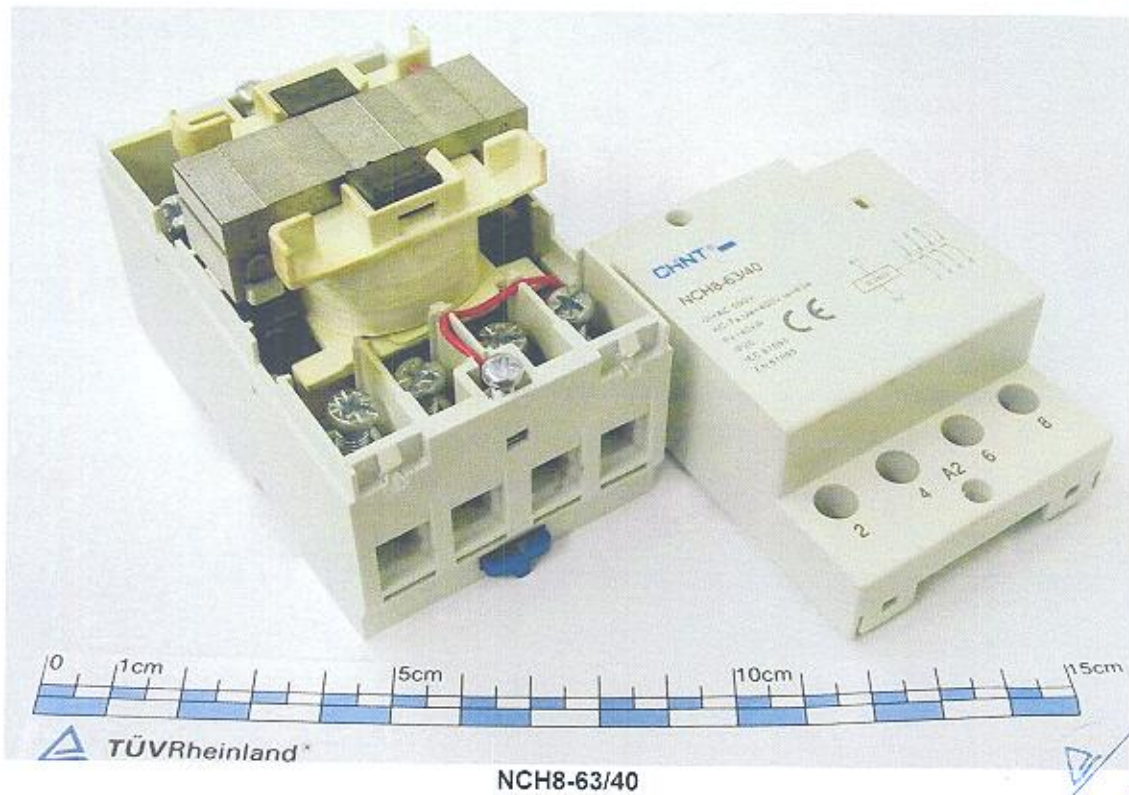

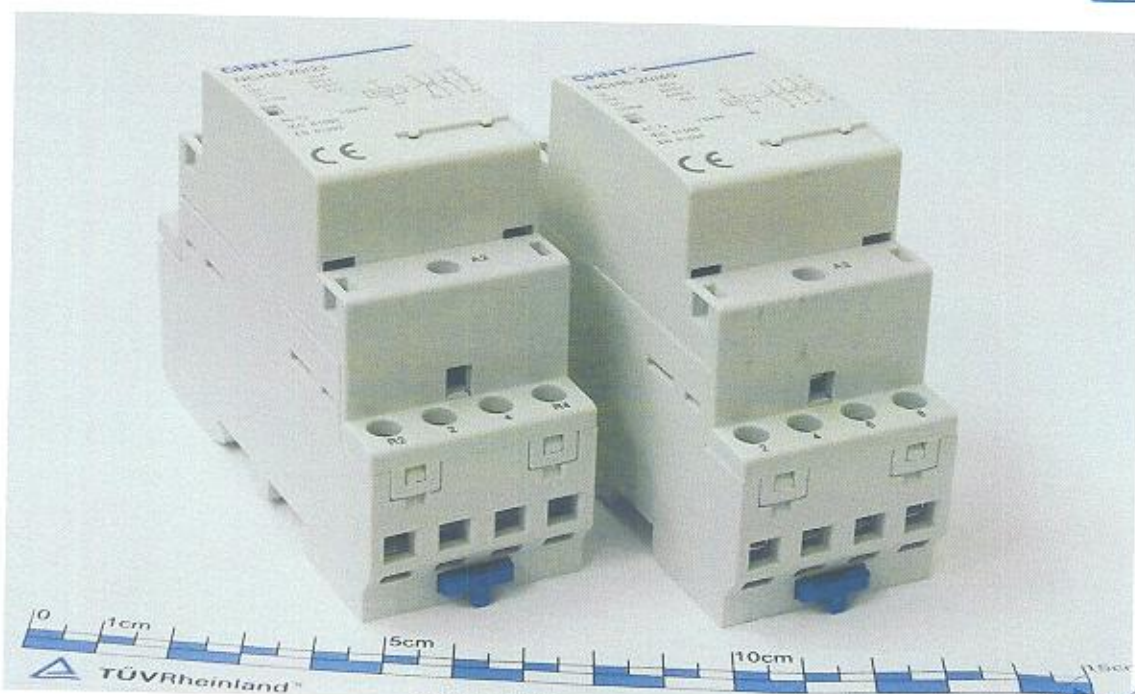


NCH8-20/22 and NCH8-20/40

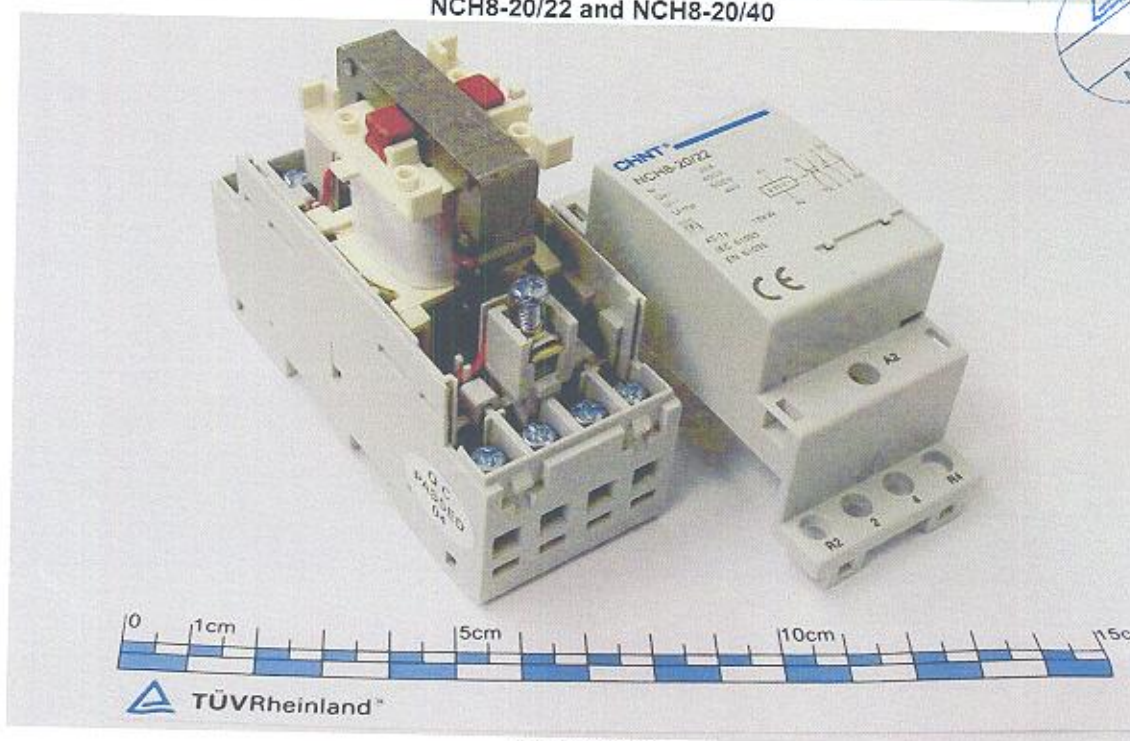

NCH8-20/22

Model: NCH8-20/22 and NCH8-20/40

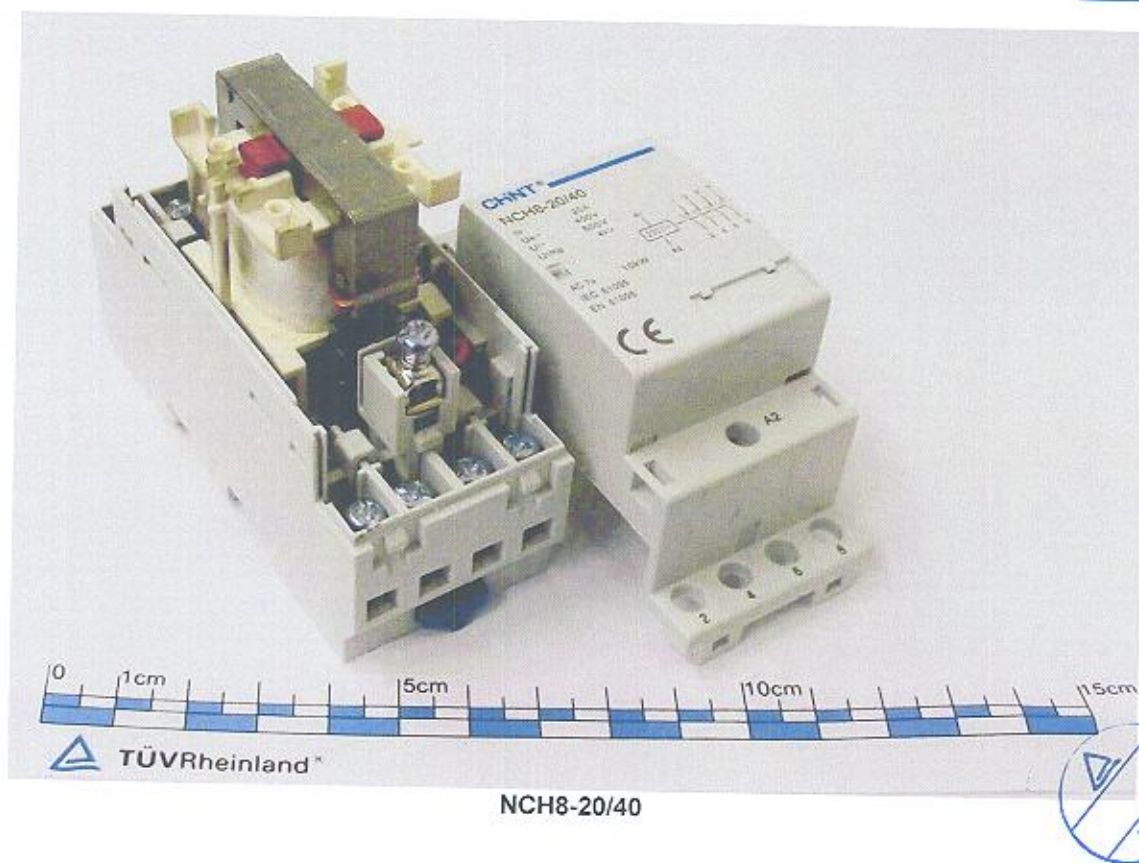

Zhejiang Chint Electrics Co., Ltd.
Huang Qin

Date : 16.10.2012

Our ref. : MR 01

Your ref.: H.Q.

No.1,
Chint Road, Chint Industrial Zone,
North Baixiang
Yueqing, Zhejiang Province 325603
P.R. China

Ref : AN Certificate of Conf. Low Voltage D.

Type of Equipment : Electromechanical Contactor for Household and
Similar Purposes

Model Designation : See Certificate

Certificate No. : AN 50236007 0001

Report No. : 15055703 001

Dear Huang Qin,


We have tested a sample of the above mentioned technical
equipment and was found to be in accordance with the
relevant standards.

Enclosed is our Certificate of Conformity.

We thank you for your support and would like to offer our
assistance and continuous services in the future.

With kind regards,

Certification Body

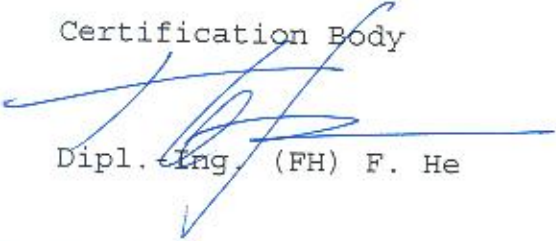
Dipl.-Ing. (FH) F. He

CC: Zhejiang Chint Electrics Co., Ltd.

Enclosure

证书的详细资料请登陆 www.tuvdotcom.com 查阅,或拨打我司客服热线 800 999 3668 / 400 883 1300 咨询

TÜV Rheinland (China) Ltd.
莱茵检测认证服务(中国)有限公司

Unit 707, AVIC Bldg., No. 108,
Central Road, East 3rd Ring
Road, Chaoyang District,
Beijing, 100022, P.R.China

北京市朝阳区东三环中路乙10号
艾维克大厦707室
邮编: 100022

Tel: (8610)6566 6660
Fax: (8610)6566 6667
e-mail: info@bj.chn.tuv.com
Internet: <http://www.chn.tuv.com>