


BODO N3

Single-outlet with floor socket outlet, wet-cleaned, round



Round single outlet with floor cover protection frame. Including pivotable tube as cable outlet, cover, mounting box with strain-relief, claw set and rubber seal. For installation in floor sockets and raised or hollow space floor openings. Equipped with an isolated ground receptacle of 45x45mm and a dummy data cover of 22,5x45mm for Keystone modules. Suitable for rooms with dry and wet-cleaned floor covers. Designed for high traffic loads.

Please mind the technical information in chapter planning.



material	Tube, cover and tube collet: aluminium or stainless steel / frame and mounting box: plastic material
type of assembly	Fixing on floor box UBDHB / rough concrete floor and installation in screed or false floor
application area	wet floor cleaning
norm	according to DIN EN 50085
permits	according to VDE / TÜV
protection class	in use IP 22 / in use with rubber sleeve UGM1-3 IP 43 / not in use IP 66
loading	including inspection stamp Ø 130 mm: 15 kN

Aluminium

Product	H	H _{min}	B	E	P _{max}	colour	IP _n	IP _g	G
BODO N3	122 mm	87 mm	140 mm	122 mm	15 kN	aluminium	IP 66	IP 43	0.74 kg
incl.:									
1x UET80-R-WD						tube			
1x UETD80-R-WD						tube cover			
1x UST45-W 1						shockproof socket single			
1x UTG 75						device separation plate			
1x UARM-3-1 118						Cover plate for 3x UDAE22			
1x UG-R						mounting box, round			
2x UGM1-3						rubber sleeve			
1x UDA22-KS 1						Data cover, Keystone			
1x UWZ-IS 8						Allen wrench			
BODO N3-CR	122 mm	87 mm	140 mm	122 mm	15 kN	chromed aluminium	IP 66	IP 43	0.74 kg





Product	H	H _{min}	B	E	P _{max}	colour	IP _n	IP _g	G
incl.:									
1x UET80-R-WD									tube
1x UETD80-R-WD									tube cover
1x UST45-W 1									shockproof socket single
1x UTG 75									device separation plate
1x UARM-3-1 118									Cover plate for 3x UDAE22
1x UG-R									mounting box, round
2x UGM1-3									rubber sleeve
1x UDA22-KS 1									Data cover, Keystone
1x UWZ-IS 8									Allen wrench

BODO N3-SW	122 mm	87 mm	140 mm	122 mm	15 kN	black	IP 66	IP 43	0.74 kg
------------	--------	-------	--------	--------	-------	-------	-------	-------	---------

incl.:									
1x UET80-R-WD									tube
1x UETD80-R-WD									tube cover
1x UST45-W 1									shockproof socket single
1x UTG 75									device separation plate
1x UARM-3-1 118									Cover plate for 3x UDAE22
1x UG-R									mounting box, round
2x UGM1-3									rubber sleeve
1x UDA22-KS 1									Data cover, Keystone
1x UWZ-IS 8									Allen wrench

Brass

Product	H	H _{min}	B	E	P _{max}	colour	IP _n	IP _g	G
BODO N3-MMS	122 mm	87 mm	140 mm	122 mm	15 kN	solid brass	IP 66	IP 43	0.74 kg

incl.:									
1x UET80-R-WD									tube
1x UETD80-R-WD									tube cover
1x UST45-W 1									shockproof socket single
1x UTG 75									device separation plate
1x UARM-3-1 118									Cover plate for 3x UDAE22
1x UG-R									mounting box, round
2x UGM1-3									rubber sleeve
1x UDA22-KS 1									Data cover, Keystone
1x UWZ-IS 8									Allen wrench

Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	H _{min}	B	E	P _{max}	colour	IP _n	IP _g	G
BODO N3-E	122 mm	87 mm	140 mm	122 mm	15 kN	Stainless steel	IP 66	IP 43	2.00 kg

incl.:									
1x UET80-R-WD									tube
1x UETD80-R-WD									tube cover
1x UST45-W 1									shockproof socket single
1x UTG 75									device separation plate
1x UARM-3-1 118									Cover plate for 3x UDAE22
1x UG-R									mounting box, round
2x UGM1-3									rubber sleeve
1x UDA22-KS 1									Data cover, Keystone
1x UWZ-IS 8									Allen wrench



H : height

H_{min} : Minimum installation height

B : width

E : fitting dimension

P_{max} : Maximum load


colour :

IP_n : IP protection level in unused condition

IP_g : IP protection level in used condition

G : weight

DETAILS / APPLICATIONS

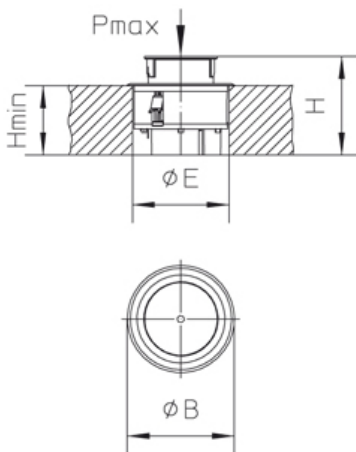

OPTIONAL ACCESSORIES

USK R122, UBDHB 122R



wet-cleaned

