


UEBDM V

tube-cartridge unit triple, quadrangular

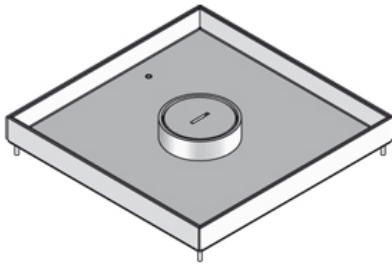

Quadrangular cartridge made of stainless steel sheet with hem. As a levellable cartridge installation frame with a tube outlet cartridge, a screwed-on aluminum tube mounting set and a rubber seal for the installation into floor boxes, assembly covers and raised or hollow floor openings. To accommodate up to 3 mounting boxes equipped with up to 9 suspension bracket installation devices or 12 installation devices of 45x45 mm. Suitable for rooms with wet-cleaned floor covers. Designed for office traffic loads.

Please mind the technical information in chapter planning.



material	cartridge and frame: 2mm high-grade steel V2A, tube mounting set: anodized aluminium
type of assembly	fastening to floor box UBDHB7levelling unit UNE
application area	wet floor cleaning
norm	acc. to DIN EN 50085
permits	according to VDE / TÜV
protection class	in use IP 22 / not in use IP 54
loading	including inspection stamp Ø 13 / 130 mm: 2 / 3 kN

Product	H	H _{min}	B	L	E	T	P _{max}	IP _n	IP _g	G
UEBDM 15-V-WD	19 mm	85 mm	258 mm	258 mm	261 x 261 mm	12 mm	2 kN	IP 54	IP 22	1.90 kg
incl.:										
1x UGD3-V 2					rubber seal, quadrangular					
4x UKS M4X16E					Phillips screw					
1x UETD-R-WD					tube cover					
UEBDM 25-V-WD	29 mm	95 mm	258 mm	258 mm	261 x 261 mm	22 mm	2 kN	IP 54	IP 22	2.10 kg
incl.:										
1x UGD3-V 2					rubber seal, quadrangular					
4x UKS M4X16E					Phillips screw					
1x UETD-R-WD					tube cover					
UEBDM 35-V-WD	39 mm	105 mm	258 mm	258 mm	261 x 261 mm	32 mm	2 kN	IP 54	IP 22	2.30 kg
incl.:										
1x UGD3-V 2					rubber seal, quadrangular					
4x UKS M4X16E					Phillips screw					
1x UETD-R-WD					tube cover					





Product	H	H _{min}	B	L	E	T	P _{max}	IP _n	IP _g	G
UEBDM 45-V-WD	49 mm	115 mm	258 mm	258 mm	261 x 261 mm	42 mm	2 kN	IP 54	IP 22	2.60 kg

incl.:

1x UGD3-V 2	rubber seal, quadrangular
4x UKS M4X16E	Phillips screw
1x UETD-R-WD	tube cover

Product	H	H _{min}	B	L	E	T	P _{max}	IP _n	IP _g	G
UEBDM 25-V-WD MS	29 mm	95 mm	258 mm	258 mm	261 x 261 mm	16 mm	2 kN	IP 54	IP 22	2.10 kg

incl.:

1x UGD3-V 2	rubber seal, quadrangular
4x UKS M4X16E	Phillips screw
1x UETD-R-WD	tube cover

Product	H	H _{min}	B	L	E	T	P _{max}	IP _n	IP _g	G
UEBDM 35-V-WD MS	39 mm	105 mm	258 mm	258 mm	261 x 261 mm	26 mm	2 kN	IP 54	IP 22	2.30 kg


incl.:

1x UGD3-V 2	rubber seal, quadrangular
4x UKS M4X16E	Phillips screw
1x UETD-R-WD	tube cover

- H** : height
- H_{min}** : Minimum installation height
- B** : width
- L** : length
- E** : fitting dimension
- T** : depth
- P_{max}** : Maximum load
- IP_n** : IP protection level in unused condition
- IP_g** : IP protection level in used condition
- G** : weight

DETAILS / APPLICATIONS



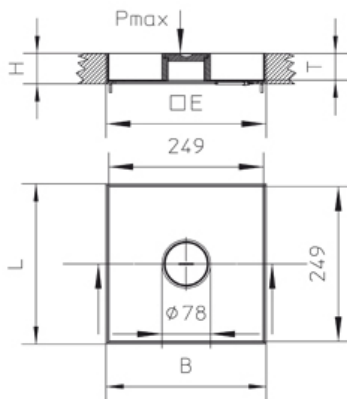

OPTIONAL ACCESSORIES

UEBDME V, UET, UNE



wet-cleaned

