



QUADRA

DIESEL PUMP SERIES

INDUSTRY EXCELLENCE, WHERE PERFORMANCE AND DURABILITY MEET

PUMP TO PERFECTION



[QPD-108HH17]

[QPD-64HH22]

[QPD-86HH22]

[QPD-66MH12]

[QPD-1210HH22]

Jeff Belanger
+1(604) 782-4774
Jeff@quadrapumps.com

57-3347 262 Street,
Aldergrove, BC
V4W 3V9, Canada

12255 104 Avenue,
Grande Prairie, AB
T8V 8A7, Canada



[QPD-108HH17]

DESCRIPTION

THE LINE OF CENTRIFUGAL PUMPS WE CARRY ARE DEVELOPED TO EFFECTIVELY MEET THE PERFORMANCE REQUIREMENTS AND DURABILITY TO POWER THE NEEDS OF A WIDE RANGE OF INDUSTRY APPLICATIONS WORLDWIDE.

QUADRA QPD-108HH17 DIESEL POWERED PUMP SERIES HAS A STEEL EXTERIOR CONSTRUCTION, HEAVY DUTY HIGH TENSILE BEARING HOUSING WITH FULL STAINLESS STEEL INTERNAL WORKING COMPONENTS. THIS HIGH QUALITY DESIGN PROVIDES PREMIUM EFFICIENCY FOR HIGH HEAD/FLOW APPLICATIONS, FEATURING A STATE OF THE ART AUTOMATIC VAC ASSIST CHAMBER AND AN ENDURA SILICONE CARBIDE RUN DRY SEAL SYSTEM.

APPLICATIONS



Industrial



Oil & Gas



Waste Water



Environmental



Construction



Mining

FEATURES

Complete Containment | Fuel Heating | PAS Systems | Telemetry | Engineered Lifting Points | Welded D Links

LED Lighting | Brake Equalizing | Levelling System | Safety Zone Controls | Glycol Heater | Viscous Fan Coupling

Components equipped for durable conditions | Optimizes efficiency and maximum life span of pump

PUMP PACKAGE DATA

450 HP Industrial Power Unit

6 Cylinder Turbo Charged | Liquid Cooled | 12 Volt | LCD Control Panel | 1 Year Warranty

Highway Rated Trailer

Full Tandem Axle | 17.5" Trailer Tires | 400 L Fuel Cell | Lifting Bale | Choice of Fittings | 8K Stabilizers | Brakes + Lights




CORNELL PUMP END

SPECIFICATIONS

8NHTA

| | |
|-----------------|----------|
| Max. Flow | 5100 GPM |
| Discharge Size | 8" |
| Suction Size | 10" |
| Solids Handling | 3.38" |
| Max. Speed | 1800 RPM |
| Shut Off Head | 350' |

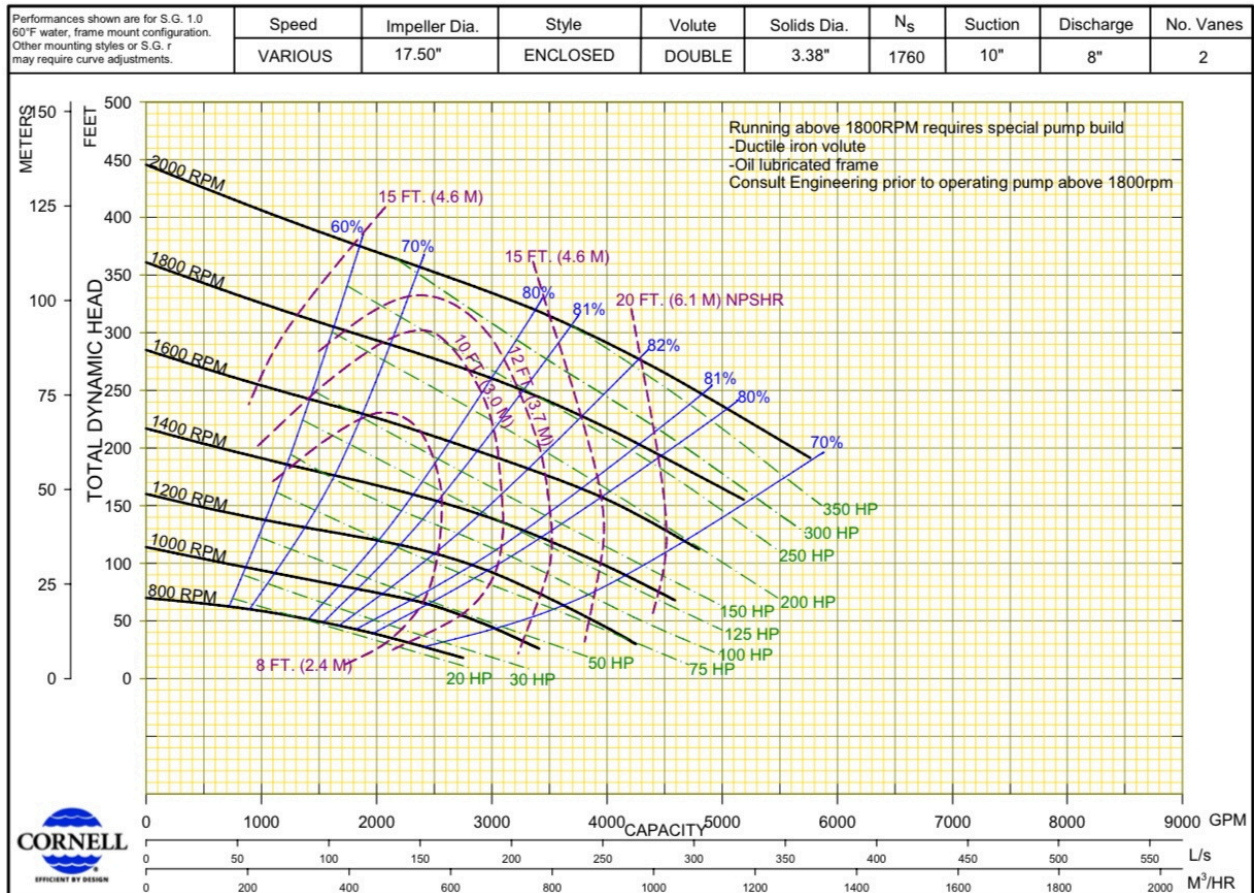



SPECIFICATIONS

PP108S17

| | |
|-----------------|----------|
| Max. Flow | 6500 GPM |
| Discharge Size | 8" |
| Suction Size | 10" |
| Solids Handling | 3.5" |
| Max. Speed | 2000 RPM |
| Shut Off Head | 450' |

PIONEER PUMP END

