


SUBMERSIBLE PUMP SERIES



[QPS3-220]

APPLICATIONS

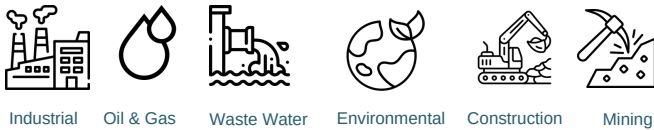

SPECIFICATIONS

| | |
|------------------|--------------------------|
| Discharge Size | 3" NPT |
| Power Output | 2 -3 hp |
| Max Flow | 202 GPM |
| Max Head | 55 ft |
| Speed | 3465 RPM |
| Voltage | 220v |
| Phase | Single |
| Amperage | 13.0 |
| Type | Dewatering (semi vortex) |
| Power Cable | 32 ft |
| pH Range | 5 - 8 |
| Max. Liquid Temp | 104 Degrees F |
| Weight | 63 lbs |

DESCRIPTION

QUADRAFLO DURABLE PERFORMANCE PUMPS ARE DESIGNED TO EFFECTIVELY POWER A WIDE RANGE OF APPLICATIONS. PROVIDING EFFICIENT AND RELIABLE SOLUTIONS FOR HIGH VOLUME INDUSTRY PUMP STANDARDS.

QUADRAFLO QPS3-220 3" SUBMERSIBLE PUMP MODEL HAS A STEEL EXTERIOR THAT IS ROBUST AND CAN WITHSTAND ANY ENVIRONMENT. A MECHANICAL DESIGN THAT USES A TRADITIONAL DOUBLE SEAL SYSTEM TO REDUCE CORROSION DURING ABRASIVE APPLICATIONS.

FEATURES

Stainless steel strainer, shaft, impeller, outlet and hardware for maximum corrosion resistance

Pressure enclosed chamber mechanically sealed

Optimizes efficiency and maximum life span of pump

Components equipped for durable conditions

PERFORMANCE CURVE

