




QUADRA

DIESEL PUMP SERIES

INDUSTRY EXCELLENCE, WHERE PERFORMANCE AND DURABILITY MEET

PUMP TO PERFECTION

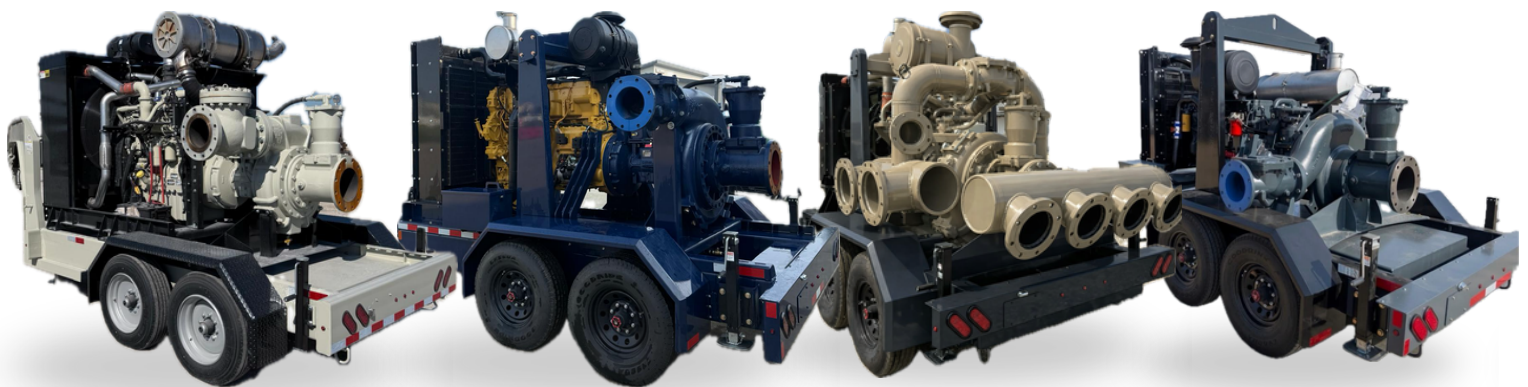

12255 104 Avenue,
Grande Prairie, AB
T8V 8A7, Canada

57-3347 262 Street,
Aldergrove, BC
V4W 3V9, Canada

12005 Cleveland Gibbs Road,
Roanoke, TX
76262, USA



[QPD-128HH22]

DESCRIPTION

THE LINE OF CENTRIFUGAL PUMPS WE CARRY ARE DEVELOPED TO EFFECTIVELY MEET THE PERFORMANCE REQUIREMENTS AND DURABILITY TO POWER THE NEEDS OF A WIDE RANGE OF INDUSTRY APPLICATIONS WORLDWIDE.

QUADRA QPD-128HH22 DIESEL POWERED PUMP SERIES HAS A STEEL EXTERIOR CONSTRUCTION, HEAVY DUTY HIGH TENSILE BEARING HOUSING WITH FULL STAINLESS STEEL INTERNAL WORKING COMPONENTS. THIS HIGH QUALITY DESIGN PROVIDES PREMIUM EFFICIENCY FOR HIGH HEAD/FLOW APPLICATIONS, FEATURING A STATE OF THE ART AUTOMATIC VAC ASSIST CHAMBER AND AN ENDURA SILICONE CARBIDE RUN DRY SEAL SYSTEM.

APPLICATIONS



Industrial



Oil & Gas



Waste Water



Environmental



Construction



Mining

FEATURES

Fuel Burn | Complete Containment | Fuel Heating | PAS Systems
| Telemetry | Engineered Lifting Points | Welded D Links

LED Lighting | Brake Equalizing | Levelling System | Safety
Zone Controls | Glycol Heater | Viscous Fan Coupling

Components equipped for durable conditions | Optimizes
efficiency and maximum life span of pump

PUMP PACKAGE DATA

500 - 800 HP Industrial Power Unit

4 Cylinder Turbo Charged | Liquid Cooled | 12 Volt | LCD
Control Panel | 1 Year Warranty


Highway Rated Trailer

Tri-Axle | 17.5" Trailer Tires | 400 L Fuel Cell | Lifting Bale |
Choice of Fittings | 8K Stabilizers | Brakes + Lights

SPECIFICATIONS

PP128S22

Max. Flow	12 000 GPM
Discharge Size	12"
Suction Size	8"
Solids Handling	3.0"
Max. Speed	2100 RPM
Shut Off Head	720'

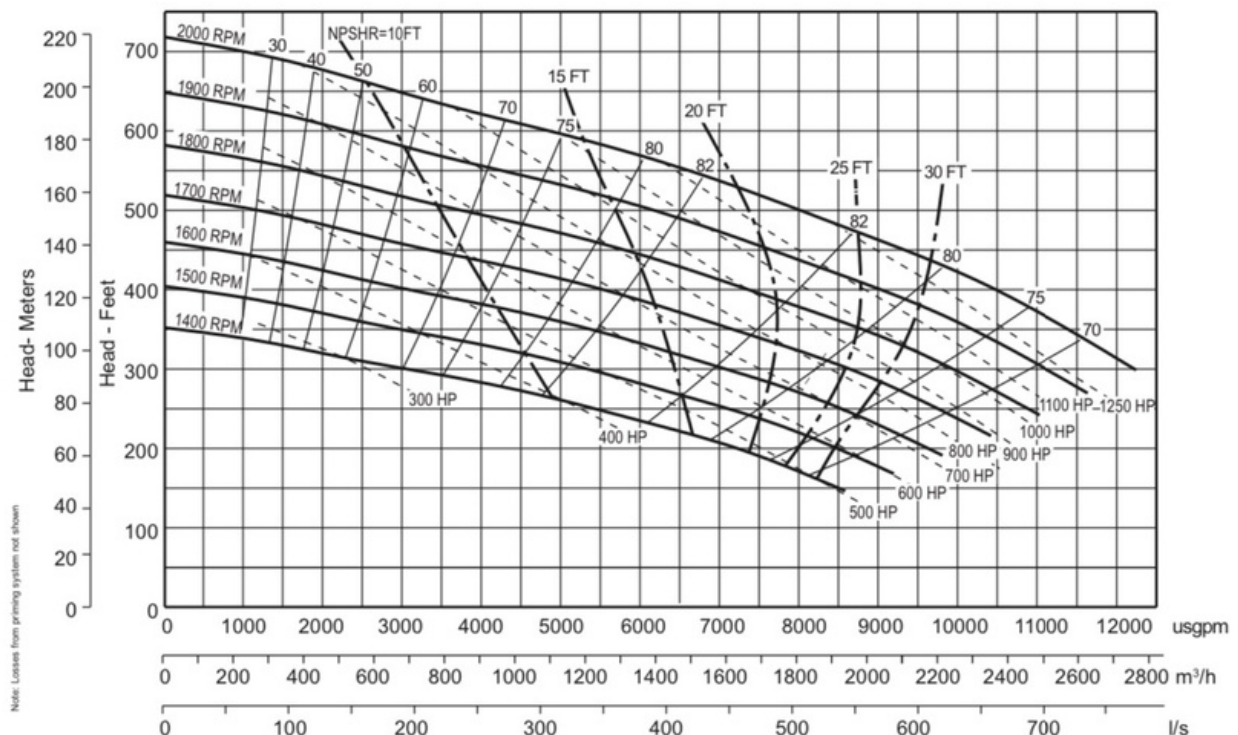

Model	PP128S22	
Size	12" x 8"	300 mm x 200 mm
Impeller Diameter	22.0"	559 mm
Solids Handling Size	3.0"	76 mm

DWG No.	13477HQ
Revision	001
Drawn By	ESW
Date	20 Jan 2014