

PUMP TO PERFECTION

INDUSTRY EXCELLENCE, WHERE PERFORMANCE AND DURABILITY MEET

QPS10-460 SUBMERSIBLE PUMP









DESCRIPTION

Quadraflo durable performance pumps are designed to effectively power a wide range of applications. Providing efficient and reliable solutions for high volume industry pump standards.

Quadraflo QPS10-460 10" submersible pump model has a steel exterior that is robust and can withstand any environment. A mechanical design that uses a traditional double seal system to reduce corrosion during abrasive applications.



SPECIFICATIONS

Discharge Size	10"ANSI
Power Output	75 hp
Max Flow	4400 GPM
Max Head	120 ft
Speed	3600 RPM
Voltage	460v
Phase	Three
Amperage	150
Туре	Dewatering (high volume)
Weight	820 kg

FEATURES

Stainless steel strainer, shaft, impeller, outlet and hardware for maximum corrosion resistance

Pressure enclosed chamber mechanically sealed

Optimizes efficiency and maximum life span of pump

Components equipped for durable conditions

APPLICATIONS

- Construction
- Waste Water
- Industrial
- Environmental
- Mining
- Oil & Gas






QPS10-460

SUBMERSIBLE PUMP SERIES

POWER	DISCHARGE	VOLTAGE	PHASE	SPEED
75 HP	10"	460 VOLT	THREE	3600 RPM

QPS10-460 PERFORMANCE CURVE

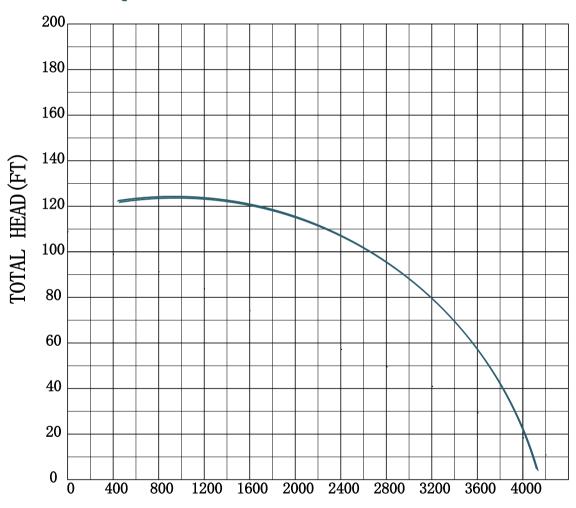

FLOW RATE (US-GALLONS PER MIN)

