

QUADRA PUMPS

powered by innovation




QUADRAFLO

SUBMERSIBLE PUMP SERIES



[QPS6-460]

APPLICATIONS

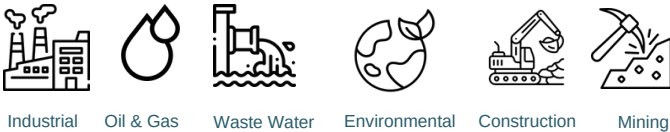

Industrial Oil & Gas Waste Water Environmental Construction Mining

SPECIFICATIONS

Discharge Size	16" NPT
Power Output	12hp
Max Flow	815 GPM
Max Head	75 ft
Speed	1750 RPM
Voltage	460v
Phase	Three
Amperage	13.0
Type	Dewatering (high vortex)
Power Cable	32 ft
pH Range	5 - 8
Max. Liquid Temp	60 Degrees F
Weight	275 lbs

DESCRIPTION

QUADRAFLO DURABLE PERFORMANCE PUMPS ARE DESIGNED TO EFFECTIVELY POWER A WIDE RANGE OF APPLICATIONS. PROVIDING EFFICIENT AND RELIABLE SOLUTIONS FOR HIGH VOLUME INDUSTRY PUMP STANDARDS.

QUADRAFLO QPS6-460 6" SUBMERSIBLE PUMP MODEL HAS A STEEL EXTERIOR THAT IS ROBUST AND CAN WITHSTAND ANY ENVIRONMENT. A MECHANICAL DESIGN THAT USES A TRADITIONAL DOUBLE SEAL SYSTEM TO REDUCE CORROSION DURING ABRASIVE APPLICATIONS.

FEATURES

Stainless steel strainer, shaft, impeller, outlet and hardware for maximum corrosion resistance

Pressure enclosed chamber mechanically sealed

Optimizes efficiency and maximum life span of pump

Components equipped for durable conditions

PERFORMANCE CURVE

