

# QUADRA DIESEL PUMP SERIES

INDUSTRY EXCELLENCE, WHERE PERFORMANCE AND DURABILITY MEET

## PUMP TO PERFECTION



[QPD-108HH17]

[QPD-64HH22]

[QPD-86HH22]

[QPD-66MH12]

[QPD-1210HH22]

Jeff Belanger +1(604) 782-4774 Jeff@quadrapumps.com 57-3347 262 Street, **Aldergrove, BC** V4W 3V9, Canada

12255 104 Avenue, **Grande Prairie, AB** T8V 8A7, Canada



[QPD-66MH12]

#### **DESCRIPTION**

THE LINE OF CENTRIFUGAL PUMPS WE CARRY ARE DEVELOPED TO EFFECTIVELY MEET THE PERFORMANCE REQUIREMENTS AND DURABILITY TO POWER THE NEEDS OF A WIDE RANGE OF INDUSTRY APPLICATIONS WORLDWIDE.

QUADRA QPD-66MH12 DIESEL POWERED PUMP SERIES HAS A STEEL EXTERIOR CONSTRUCTION, HEAVY DUTY HIGH TENSILE BEARING HOUSING WITH FULL STAINLESS STEEL INTERNAL WORKING COMPONENTS. THIS HIGH QUALITY DESIGN PROVIDES PREMIUM EFFICIENCY FOR HIGH HEAD/FLOW APPLICATIONS, FEATURING A STATE OF THE ART AUTOMATIC VAC ASSIST CHAMBER AND AN ENDURA SILICONE CARBIDE RUN DRY SEAL SYSTEM.

#### **APPLICATIONS**













Minina

Industrial Oil & Gas

Waste Water

Environmental

Construction

#### **FEATURES**

Complete Containment | Fuel Heating | PAS Systems | Telemetry | Engineered Lifting Points | Welded D Links

LED Lighting | Brake Equalizing | Levelling System | Safety Zone Controls | Glycol Heater | Viscous Fan Coupling

Components equipped for durable conditions | Optimizes efficiency and maximum life span of pump

### **PUMP PACKAGE DATA**

#### 74 HP Industrial Power Unit

4 Cylinder Turbo Charged | Liquid Cooled | 12 Volt | LCD Control Panel | 1 Year Warranty

#### **Highway Rated Trailer**

6k Single Axle | 17.5" Trailer Tires | 400 L Fuel Cell | Lifting Bale | Choice of Fittings | 8K Stabilizers | Brakes + Lights






#### **SPECIFICATIONS**

6	612T
Max. Flow	2680 GPM
Discharge Size	6"
Suction Size	6"
Solids Handling	3"
Max. Speed	2200 RPM
Shut Off Head	245'



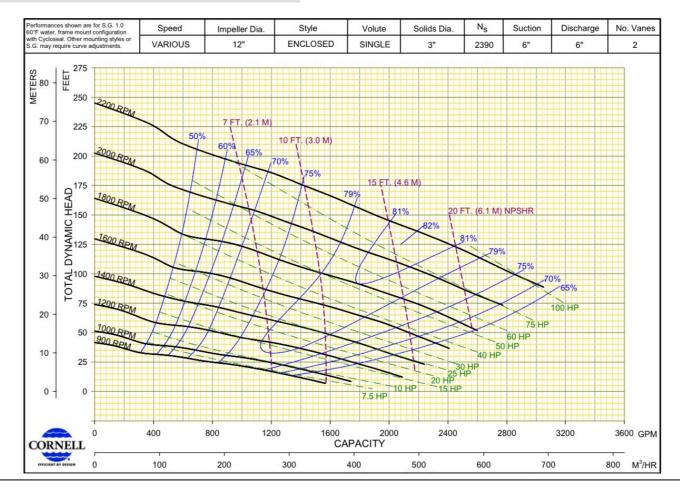






#### **PIONEER PUMP END**

#### **SPECIFICATIONS**

PP66S12	
Max. Flow	3400 GPM
Discharge Size	6"
Suction Size	6"
Solids Handling	3"
Max. Speed	2200 RPM
Shut Off Head	200'



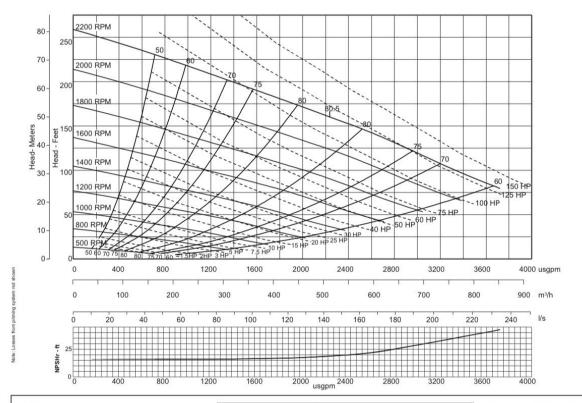



Model	PP66S12	
Size	6" x 6"	150 mm x 150 mm
Impeller Diameter	12.0"	305 mm
Solids Handling Size	3.0"	76 mm

DWG No. A5856HQ
Revision 003
Drawn By
Date 31 Mar 2014