




QUADRA

DIESEL PUMP SERIES

INDUSTRY EXCELLENCE, WHERE PERFORMANCE AND DURABILITY MEET

PUMP TO PERFECTION

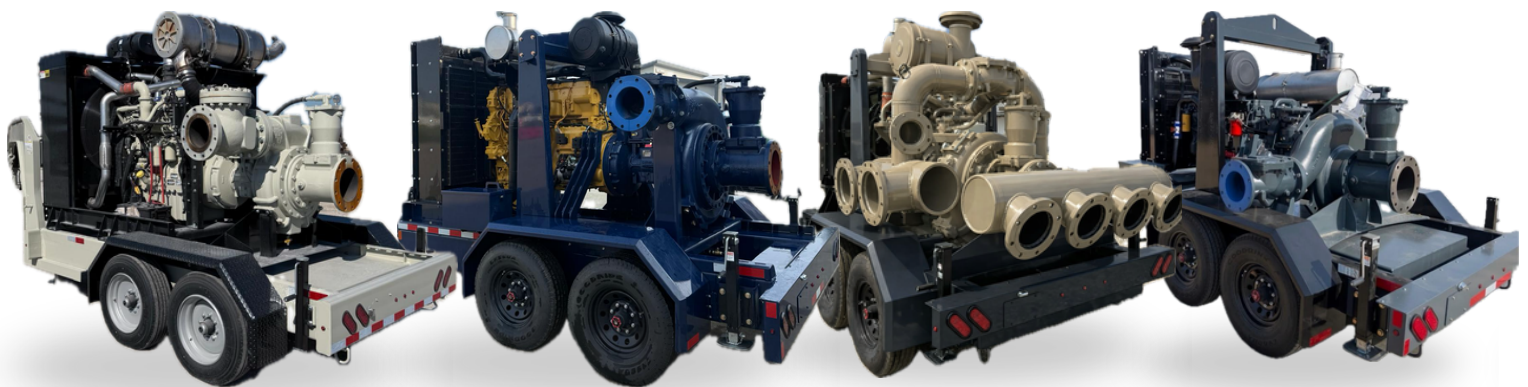

12255 104 Avenue,
Grande Prairie, AB
T8V 8A7, Canada

57-3347 262 Street,
Aldergrove, BC
V4W 3V9, Canada

12005 Cleveland Gibbs Road,
Roanoke, TX
76262, USA



[QPD-86HH19]

DESCRIPTION

THE LINE OF CENTRIFUGAL PUMPS WE CARRY ARE DEVELOPED TO EFFECTIVELY MEET THE PERFORMANCE REQUIREMENTS AND DURABILITY TO POWER THE NEEDS OF A WIDE RANGE OF INDUSTRY APPLICATIONS WORLDWIDE.

QUADRA QPD-86HH19 DIESEL POWERED PUMP SERIES HAS A STEEL EXTERIOR CONSTRUCTION, HEAVY DUTY HIGH TENSILE BEARING HOUSING WITH FULL STAINLESS STEEL INTERNAL WORKING COMPONENTS. THIS HIGH QUALITY DESIGN PROVIDES PREMIUM EFFICIENCY FOR HIGH HEAD/FLOW APPLICATIONS, FEATURING A STATE OF THE ART AUTOMATIC VAC ASSIST CHAMBER AND AN ENDURA SILICONE CARBIDE RUN DRY SEAL SYSTEM.

APPLICATIONS



Industrial



Oil & Gas



Waste Water



Environmental



Construction



Mining

FEATURES

Fuel Burn | Complete Containment | Fuel Heating | PAS Systems
| Telemetry | Engineered Lifting Points | Welded D Links

LED Lighting | Brake Equalizing | Levelling System | Safety
Zone Controls | Glycol Heater | Viscous Fan Coupling

Components equipped for durable conditions | Optimizes
efficiency and maximum life span of pump

PUMP PACKAGE DATA

200 - 400 HP Industrial Power Unit

4 Cylinder Turbo Charged | Liquid Cooled | 12 Volt | LCD
Control Panel | 1 Year Warranty

Highway Rated Trailer

Full Tandem Axle | 17.5" Trailer Tires | 400 L Fuel Cell | Lifting
Bale | Choice of Fittings | 8K Stabilizers | Brakes + Lights

SPECIFICATIONS

6NHTB19

Max. Flow	3580 GPM
Discharge Size	6"
Suction Size	8"
Solids Handling	2"
Max. Speed	2100 RPM
Shut Off Head	625'

