

QUADRA PUMPS

powered by innovation



QUADRA

DIESEL PUMP SERIES

INDUSTRY EXCELLENCE, WHERE PERFORMANCE AND DURABILITY MEET

PUMP TO PERFECTION



[QPD-108HH17]

[QPD-64HH22]

[QPD-86HH22]

[QPD-66MH12]

[QPD-1210HH22]

Jeff Belanger
+1(604) 782-4774
Jeff@quadrapumps.com

57-3347 262 Street,
Aldergrove, BC
V4W 3V9, Canada

12255 104 Avenue,
Grande Prairie, AB
T8V 8A7, Canada

QUADRA PUMPS

powered by innovation



[QPD-128HH22]

DESCRIPTION

THE LINE OF CENTRIFUGAL PUMPS WE CARRY ARE DEVELOPED TO EFFECTIVELY MEET THE PERFORMANCE REQUIREMENTS AND DURABILITY TO POWER THE NEEDS OF A WIDE RANGE OF INDUSTRY APPLICATIONS WORLDWIDE.

QUADRA QPD-128HH22 DIESEL POWERED PUMP SERIES HAS A STEEL EXTERIOR CONSTRUCTION, HEAVY DUTY HIGH TENSILE BEARING HOUSING WITH FULL STAINLESS STEEL INTERNAL WORKING COMPONENTS. THIS HIGH QUALITY DESIGN PROVIDES PREMIUM EFFICIENCY FOR HIGH HEAD/FLOW APPLICATIONS, FEATURING A STATE OF THE ART AUTOMATIC VAC ASSIST CHAMBER AND AN ENDURA SILICONE CARBIDE RUN DRY SEAL SYSTEM.

APPLICATIONS



Industrial



Oil & Gas



Waste Water



Environmental



Construction



Mining

FEATURES

Complete Containment | Fuel Heating | PAS Systems | Telemetry | Engineered Lifting Points | Welded D Links

LED Lighting | Brake Equalizing | Levelling System | Safety Zone Controls | Glycol Heater | Viscous Fan Coupling

Components equipped for durable conditions | Optimizes efficiency and maximum life span of pump

PUMP PACKAGE DATA

500-800 HP Industrial Power Unit

6 Cylinder Turbo Charged | Liquid Cooled | 24 Volt | LCD Control Panel | 1 Year Warranty

Highway Rated Trailer

Tri-Axle | 17.5" Trailer Tires | 400 L Fuel Cell | Lifting Bale | Choice of Fittings | 8K Stabilizers | Brakes + Lights

QUADRA PUMPS

powered by innovation





PIONEER PUMP END

SPECIFICATIONS

PP128S22

Max. Flow	12 000 GPM
Discharge Size	12"
Suction Size	8"
Solids Handling	3.0"
Max. Speed	2100 RPM
Shut Off Head	720'

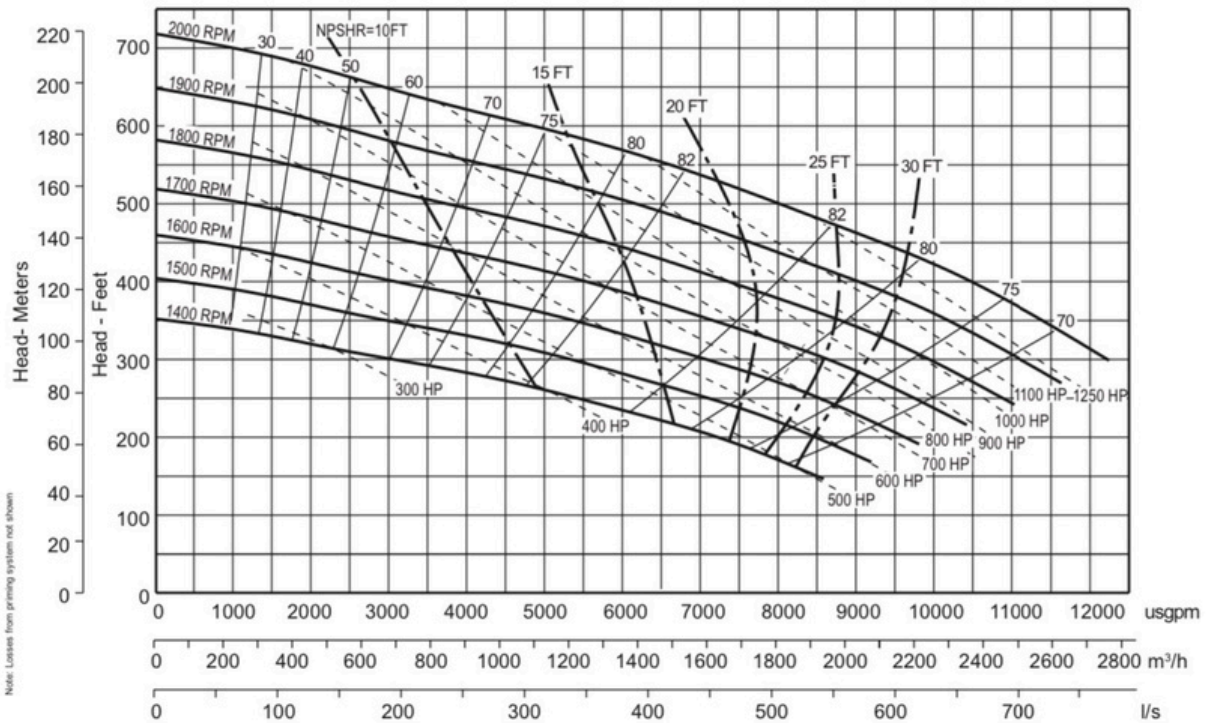

	Model	PP128S22		DWG No.	13477HQ
	Size	12" x 8"	300 mm x 200 mm	Revision	001
	Impeller Diameter	22.0"	559 mm	Drawn By	ESW
	Solids Handling Size	3.0"	76 mm	Date	20 Jan 2014