


KCP24ZX

KCP24ZX4120

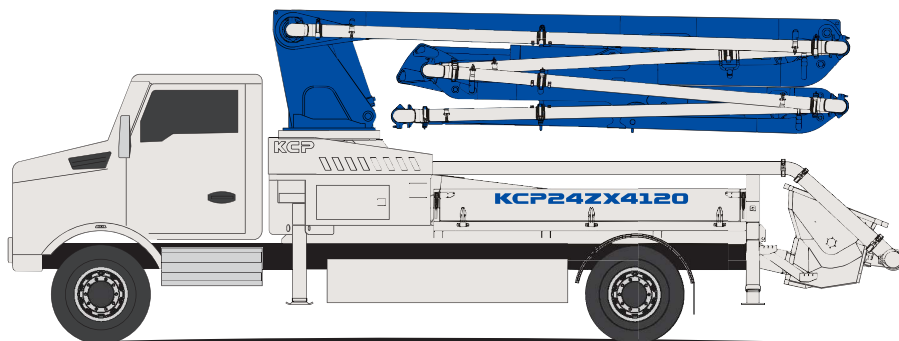



Boom specifications

Vertical reach	23,4 m	76' 9"
Horizontal reach	19.4 m	63' 7"
Reach from front of truck	15.9 m	52' 2"
Unfolding height	5,6 m	18' 4"
Section articulation	94°/180°/260°/250°	
Rotation	370°	
Delivery line	125 mm	5"
Proportional boom	Yes	
End hose length	3 m	9' 10"
Outrigger spread-front	5.8 m	19'
Outrigger spread-rear	2.7 m	8' 10"
Max.outrigger weight	11,000 kg	24,250 lb

Pump specifications

Maximum output	120 m ³ /h	157 yd ³ /h
Concrete cylinder	Ø230 × 1800	9" × 71"
Stroke per minute	27	
Concrete pressure	95 bar	1,378 psi
Hopper capacity	0,6 m ³	21 ft ³
S-tube	Ø220 × Ø180	9" × 7"
Hydraulic pump	140+140 cc/rev	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	40 mm	1.5"

Working diagram

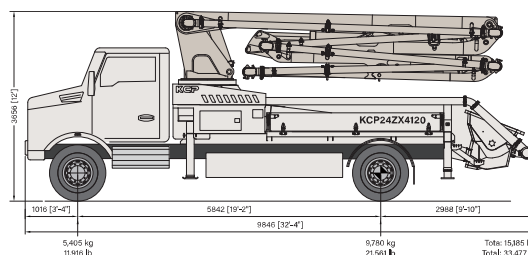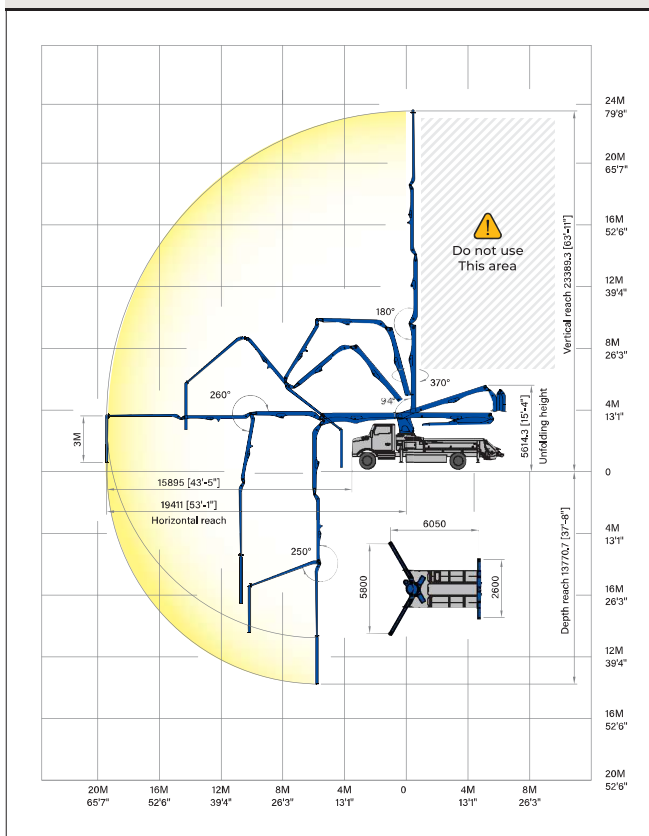

• Photos and drawings are for illustrative purpose only. / • Right to make technical amendments reserved. / • Both Rexroth and Kawasaki pump cell available.
 • Dimension will vary with different truck makes, models and specifications. / • Maximum theoretical values listed.