


KCP28ZX

KCP28ZX4120

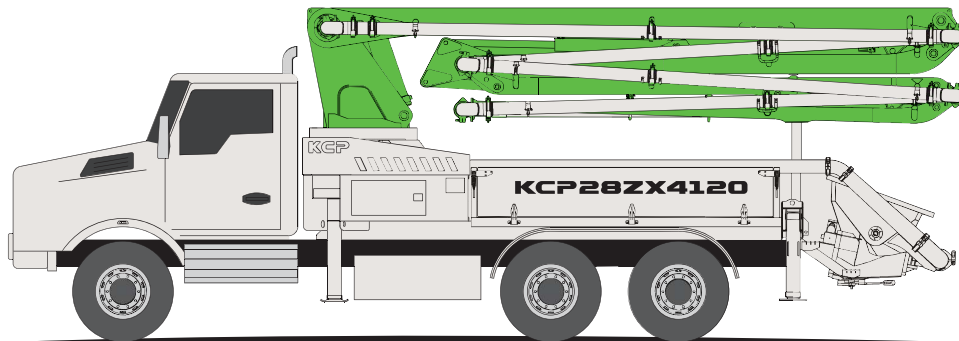

Boom specifications

Vertical reach	26,3 m	86' 5"
Horizontal reach	22,3 m	73' 3"
Reach from front of truck	18,6 m	61' 2"
Unfolding height	6,2 m	20' 4"
Section articulation	91°/180°/240°/245°	
Rotation	370°	
Delivery line	125 mm	5"
Proportional boom	Yes	
End hose length	3 m	9' 10"
Outrigger spread-front	5,8 m	19' 1"
Outrigger spread-rear	3,8 m	12' 6"
Max. outrigger weight	13,500 kg	28,660 lb

Pump specifications

Maximum output	120 m³/h	157 yd³/h
Concrete cylinder	Ø230 × 1800	9" × 71"
Stroke per minute	27	
Concrete pressure	95 bar	1,378 psi
Hopper capacity	0,6 m³	21 ft³
S-tube	Ø220 × Ø180	9" × 7"
Hydraulic pump	140+140 cc/rev	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	40 mm	1,5"

Working diagram

