


KCP33RZ

KCP33RZ5170

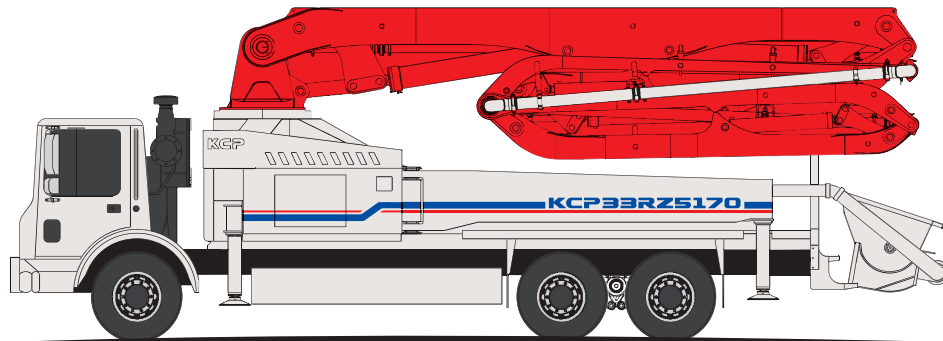




Boom specifications

Vertical reach	31,6 m	103' 8"
Horizontal reach	27.7 m	91' 2"
Reach from front of truck	24.8 m	81' 4"
Unfolding height	5.8 m	19' 1"
Section articulation	90°+70°/180°/240°/215°/235°	
Rotation	370°	
Delivery line	125 mm	5"
Proportional boom	Yes	
End hose length	3 m	9' 10"
Outrigger spread-front	6.18 m	20' 4"
Outrigger spread-rear	7.15 m	23' 7"
Max. outrigger weight	22,500 kg	49,604 lb

Pump specifications

Maximum output	170 m³/h	222 yd³/h
Concrete cylinder	Ø230 × 2100	9" × 83"
Stroke per minute	33	
Concrete pressure	95 bar	1,377 psi
Hopper capacity	0,6 m³	21 ft³
S-tube	Ø220 × Ø180	9" × 7"
Hydraulic pump	200+200 cc/rev	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	40 mm	1.5"

Working diagram

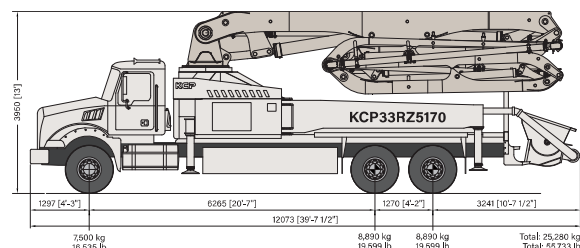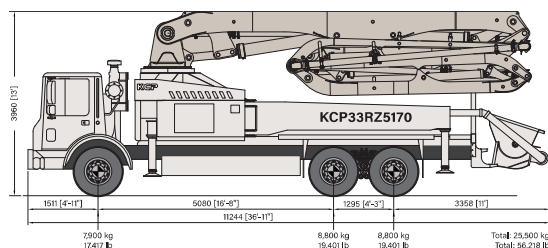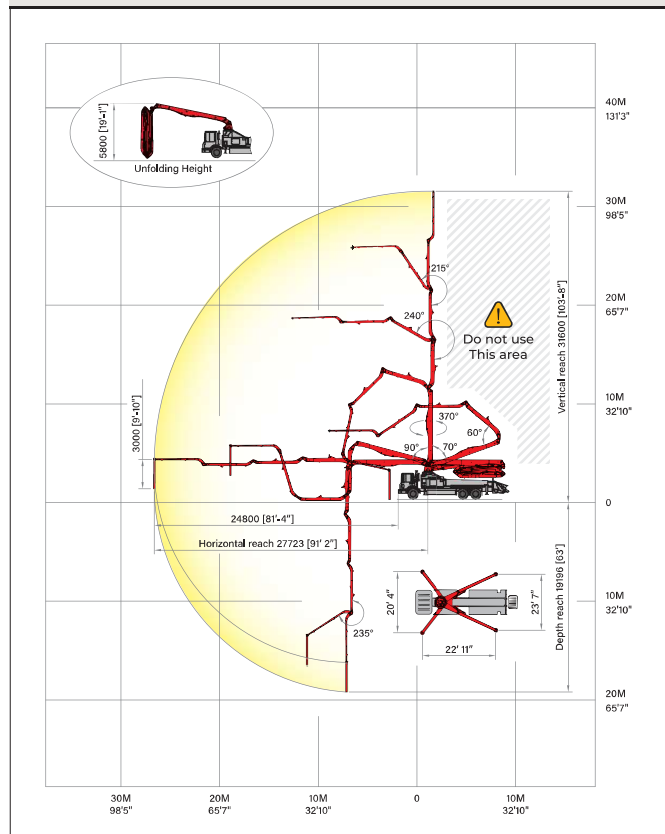

• Photos and drawings are for illustrative purpose only. / • Right to make technical amendments reserved. / • Both Rexroth and Kawasaki pump cell available.
 • Dimension will vary with different truck makes, models and specifications. / • Maximum theoretical values listed.