


KCP40ZX

KCP40ZX5170

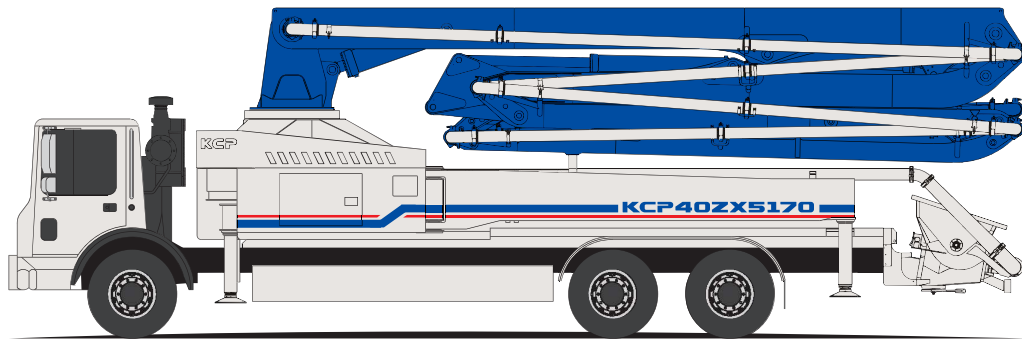




Boom specifications

Vertical reach	39,6 m	129' 11"
Horizontal reach	35.6 m	116' 10"
Reach from front of truck	32.2 m	106' 8"
Unfolding height	7,9 m	25' 11"
Section articulation	92°/186°/240°/180°/245°	
Rotation	370°	
Delivery line	125 mm	5"
Proportional boom	Yes	
End hose length	3,5 m	11' 6"
Outrigger spread-front	6,2 m	20' 4"
Outrigger spread-rear	8,1 m	26' 7"
Max.outrigger weight	25,000 kg	55,116 lb

Pump specifications

Maximum output	170 m³/h	222 yd³/h
Concrete cylinder	Ø230 × 2100	9" × 83"
Stroke per minute	33	
Concrete pressure	95 bar	1,377 psi
Hopper capacity	0,6 m³	21 ft³
S-tube	Ø220 × Ø180	9" × 7"
Hydraulic pump	200+200 cc/rev	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	40 mm	1,5"

Working diagram

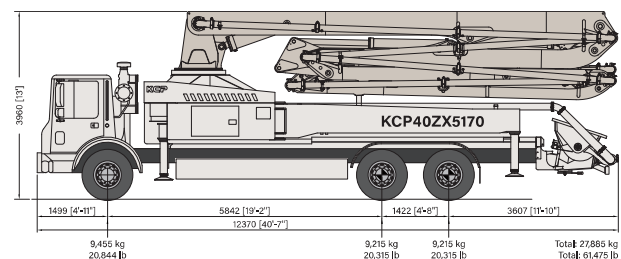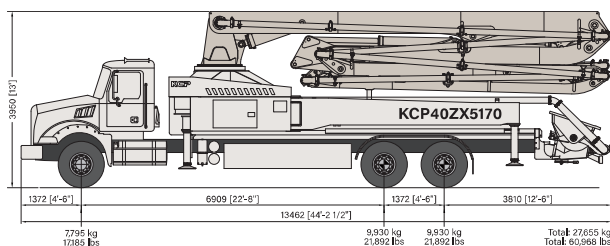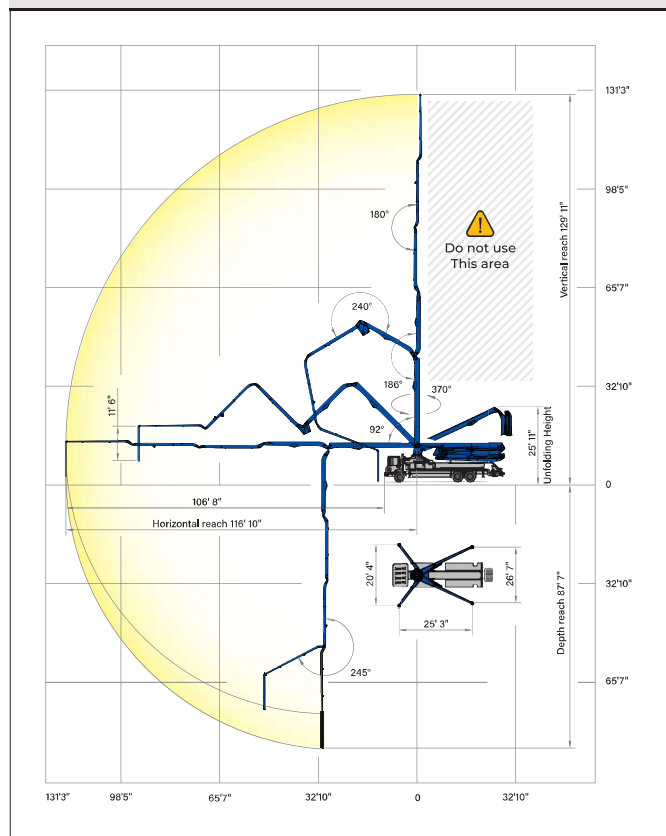

- Photos and drawings are for illustrative purpose only, / • Right to make technical amendments reserved, / • Both Rexroth and Kawasaki pump cell available.
- Dimension will vary with different truck makes, models and specifications. / • Maximum theoretical values listed.