


# KCP46ZX

## KCP46ZX5170HP

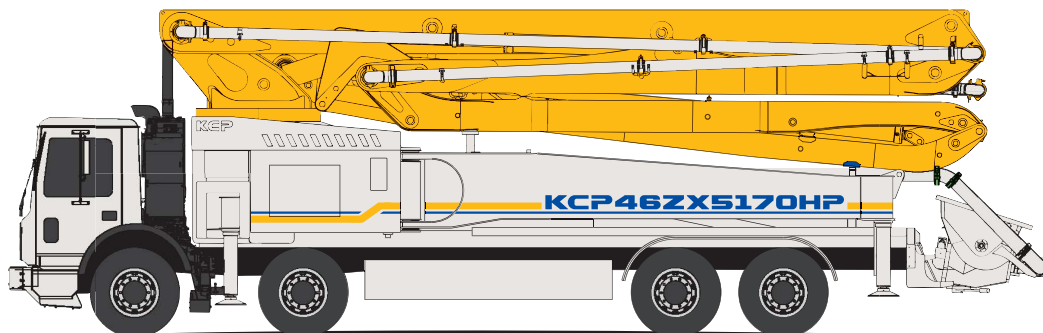

### Boom specifications

|                           |                         |           |
|---------------------------|-------------------------|-----------|
| Vertical reach            | 45,1 m                  | 148'      |
| Horizontal reach          | 40.0 m                  | 131' 3"   |
| Reach from front of truck | 37.2 m                  | 122' 1"   |
| Unfolding height          | 9,2 m                   | 30' 2"    |
| Section articulation      | 92°/180°/225°/180°/210° |           |
| Rotation                  | 370°                    |           |
| Delivery line             | 125 mm                  | 5"        |
| Proportional boom         | Yes                     |           |
| End hose length           | 3,5 m                   | 11' 6"    |
| Outrigger spread-front    | 8,8 m                   | 28' 10"   |
| Outrigger spread-rear     | 9,5 m                   | 31' 2"    |
| Max. outrigger weight     | 29,000kg                | 63,934 lb |

### Pump specifications

|                     |                                 |           |
|---------------------|---------------------------------|-----------|
| Maximum output      | 170 m³/h                        | 222 yd³/h |
| Concrete cylinder   | Ø230 × 2100                     | 9" × 83"  |
| Stroke per minute   | 33                              |           |
| Concrete pressure   | 95 bar                          | 1,377 psi |
| Hopper capacity     | 0,6 m³                          | 21 ft³    |
| S-tube              | Ø220 × Ø180                     | 9" × 7"   |
| Hydraulic pump      | 200+200 cc/rev                  |           |
| Cycling system      | Hydraulic with manual overrides |           |
| Max. aggregate size | 40 mm                           | 1,5"      |

### Working diagram

