


KCP52ZX

KCP52ZX5170HP

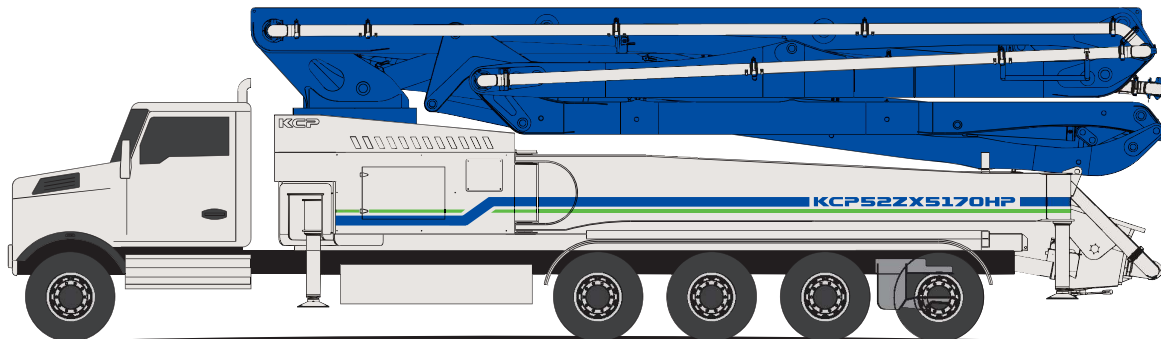

Boom specifications

Vertical reach	51,2 m	168'
Horizontal reach	46,0 m	151' 1"
Reach from front of truck	41,8 m	137' 3"
Unfolding height	10,8 m	35' 6"
Section articulation	91°/180°/215°/180°/210°	
Rotation	370°	
Delivery line	125 mm	5"
Proportional boom	Yes	
End hose length	3,5 m	11' 6"
Outrigger spread-front	9,1 m	29' 10"
Outrigger spread-rear	10,6 m	34' 9"
Max.outrigger weight	38,000 kg	83,776 lb

Pump specifications

Maximum output	170 m ³ /h	222 yd ³ /h
Concrete cylinder	Ø230 × 2100	9" × 83"
Stroke per minute	33	
Concrete pressure	95 bar	1,377 psi
Hopper capacity	0,6 m ³	21 ft ³
S-tube	Ø220 × Ø180	9" × 7"
Hydraulic pump	200+200 cc/rev	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	40 mm	1,5"

Working diagram

