


KCP56ZX

KCP56ZX5170HP

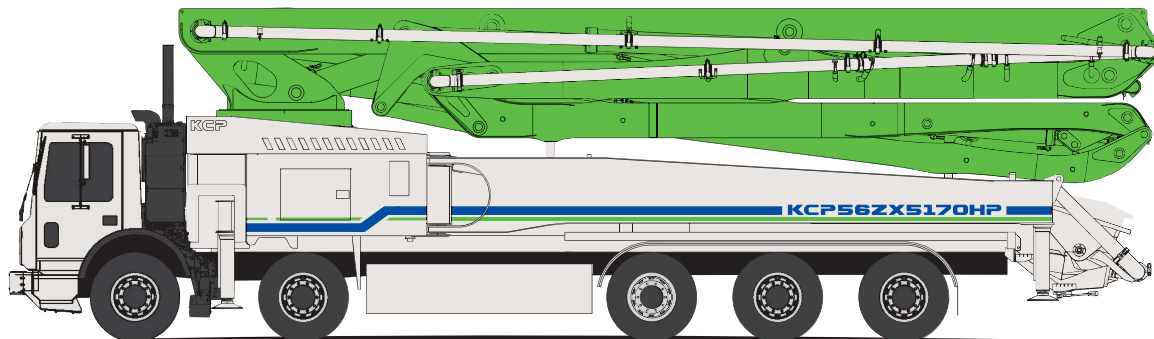




Boom specifications

Vertical reach	55,3 m	181' 5"
Horizontal reach	50.1 m	164' 8"
Reach from front of truck	46.8 m	153' 9"
Unfolding height	12,4 m	40' 10"
Section articulation	91°/180°/225°/180°/210°/90°	
Rotation	370°	
Delivery line	125 mm	5"
Proportional boom	Yes	
End hose length	3,5 m	11' 6"
Outrigger spread-front	9,1 m	29' 11"
Outrigger spread-rear	12,9 m	42' 3"
Max. outrigger weight	40,000kg	88,184 lb

Pump specifications

Maximum output	170 m³/h	222 yd³/h
Concrete cylinder	Ø230 × 2100	9" × 83"
Stroke per minute	33	
Concrete pressure	95 bar	1,377 psi
Hopper capacity	0,6 m³	21 ft³
S-tube	Ø220 × Ø180	9" × 7"
Hydraulic pump	200+200 cc/rev	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	40 mm	1,5"

Working diagram

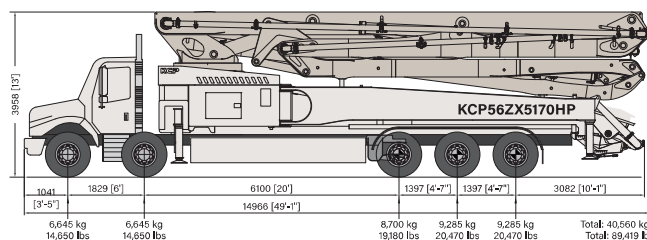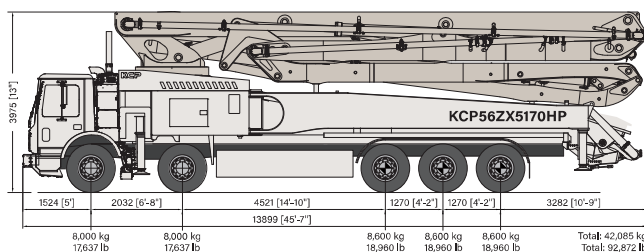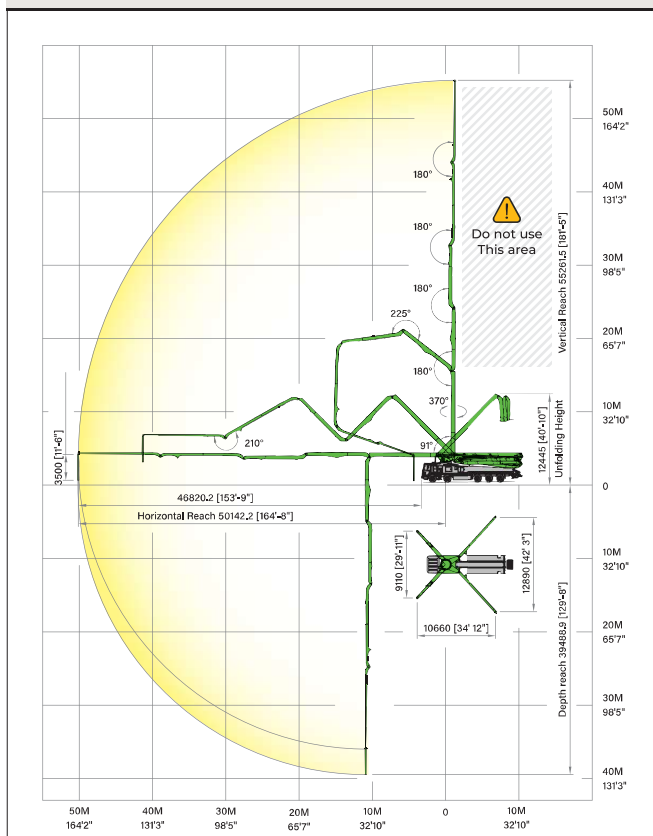

• Photos and drawings are for illustrative purpose only, / • Right to make technical amendments reserved, / • Both Rexroth and Kawasaki pump cell available.
 • Dimension will vary with different truck makes, models and specifications. / • Maximum theoretical values listed.