


KCP62ZX

KCP62ZX5170HP

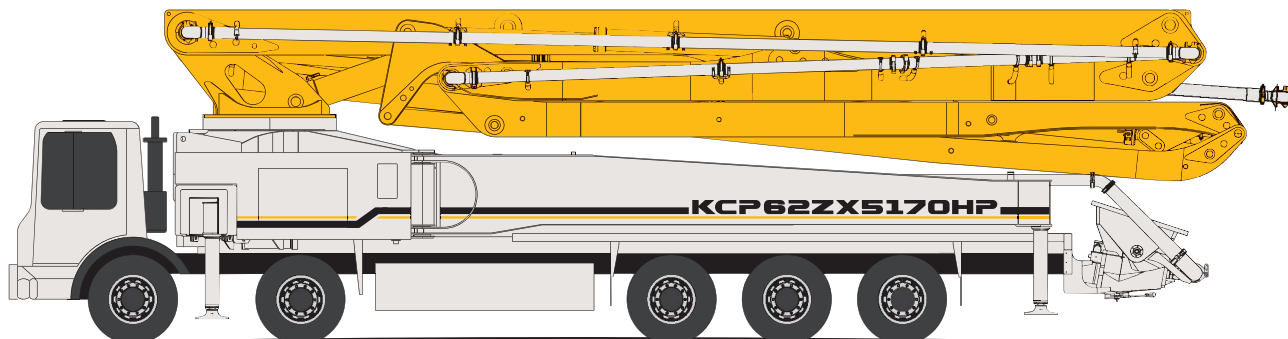

Boom specifications		
Vertical reach	60,9 m	200'
Horizontal reach	55,7 m	182' 11"
Reach from front of truck	52,6 m	172' 7"
Unfolding height	14,2 m	46' 7"
Section articulation	92°/180°/210°/180°/210°	
Rotation	370°	
Delivery line	125 mm	5"
Proportional boom	Yes	
End hose length	3,5 m	11' 6"
Outrigger spread-front	10,4 m	34' 1"
Outrigger spread-rear	13,2 m	43' 4"
Max. outrigger weight	42,500 kg	93,696 lb

Pump specifications		
Maximum output	170 m³/h	222 yd³/h
Concrete cylinder	Ø230 × 2100	9" × 83"
Stroke per minute	33	
Concrete pressure	95 bar	1,377 psi
Hopper capacity	0,6 m³	21 ft³
S-tube	Ø220 × Ø180	9" × 7"
Hydraulic pump	200+200 cc/rev	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	40 mm	1,5"

Working diagram

