


KCP65ZS

KCP65ZS5170HP

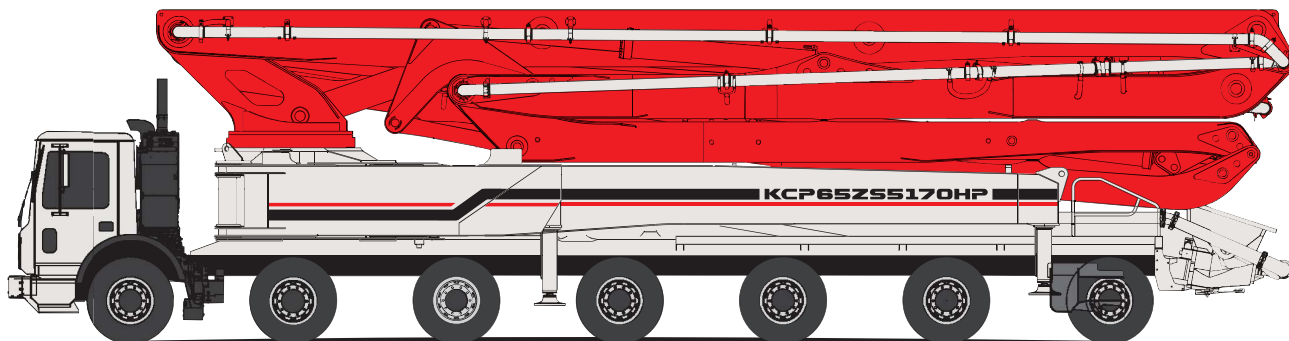




Boom specifications

Vertical reach	64,8 m	212' 7"
Horizontal reach	59.1 m	193' 10"
Reach from front of truck	55.4 m	191' 9"
Unfolding height	14,5 m	47' 6"
Section articulation	91°/180°/200°/180°/200°	
Rotation	370°	
Delivery line	125 mm	5"
Proportional boom	Yes	
End hose length	3,5 m	11' 6"
Outrigger spread-front	13,7 m	45'
Outrigger spread-rear	13,63 m	44' 9"
Max. outrigger weight	55,000 kg	121,254 lb

Pump specifications

Maximum output	170 m³/h	222 yd³/h
Concrete cylinder	Ø230 × 2100	9" × 83"
Stroke per minute	32	
Concrete pressure	110 bar	1,595 psi
Hopper capacity	0,6 m³	21 ft³
S-tube	Ø220 × Ø180	9" × 7"
Hydraulic pump	200+200 cc/rev	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	40 mm	1,5"

Working diagram

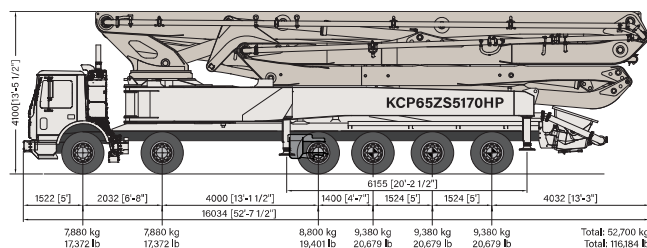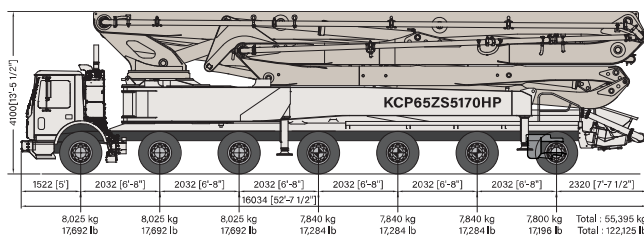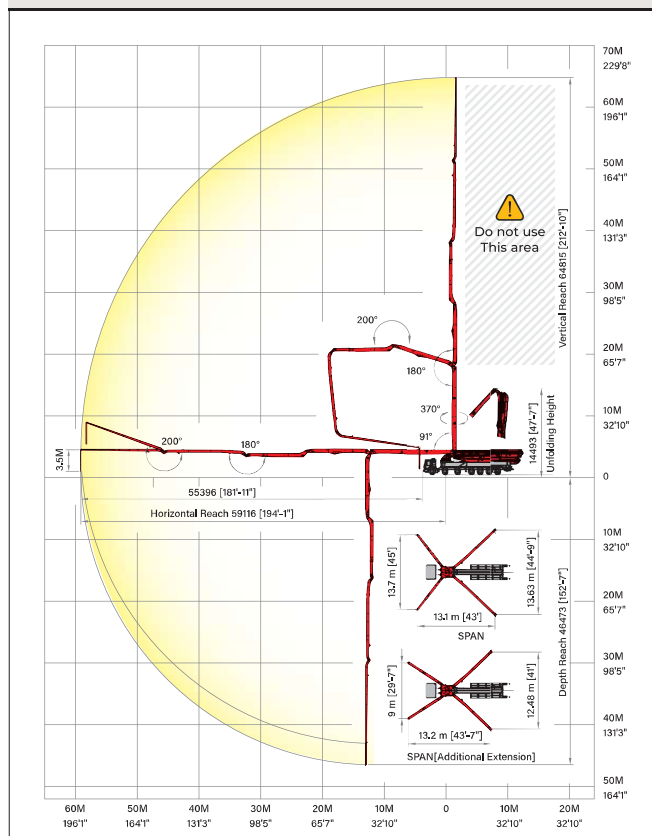

• Photos and drawings are for illustrative purpose only, / • Right to make technical amendments reserved, / • Both Rexroth and Kawasaki pump cell available.
 • Dimension will vary with different truck makes, models and specifications. / • Maximum theoretical values listed.