


KCP70ZS

KCP70ZS5170HP

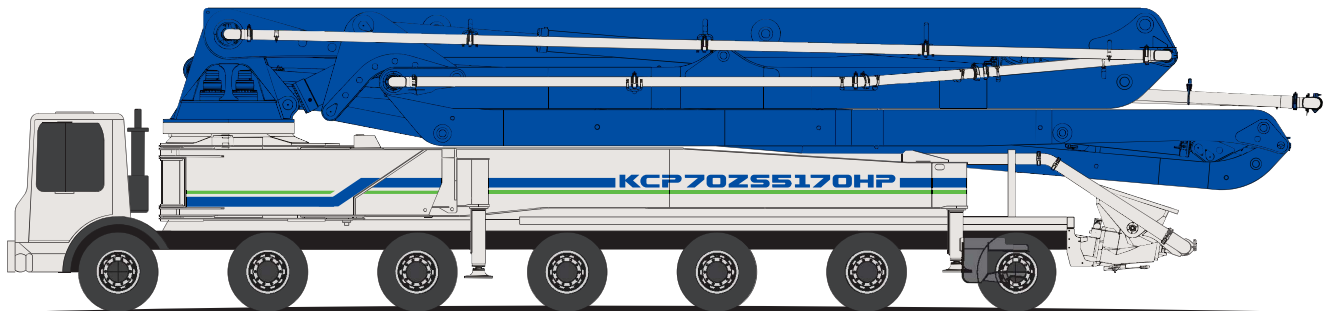

Boom specifications

Vertical reach	69,45 m	227' 10"
Horizontal reach	65,22 m	214'
Reach from front of truck	61,90 m	203' 1"
Unfolding height	15,6 m	51' 2"
Section articulation	92°/180°/200°/180°/200°	
Rotation	370°	
Delivery line	125 mm	5"
Proportional boom	Yes	
End hose length	3,5 m	11' 6"
Outrigger spread-front	13,7 m	45'
Outrigger spread-rear	13,63 m	44' 9"
Max. outrigger weight	55,000 kg	121,254 lb

Pump specifications

Maximum output	170 m ³ /h	222 yd ³ /h
Concrete cylinder	Ø230 × 2100	9" × 83"
Stroke per minute	32	
Concrete pressure	110 bar	1,595 psi
Hopper capacity	0,6 m ³	21 ft ³
S-tube	Ø220 × Ø180	9" × 7"
Hydraulic pump	200+200 cc/rev	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	40 mm	1,5"

Working diagram

