


KCP75ZS

KCP75ZS5170HP

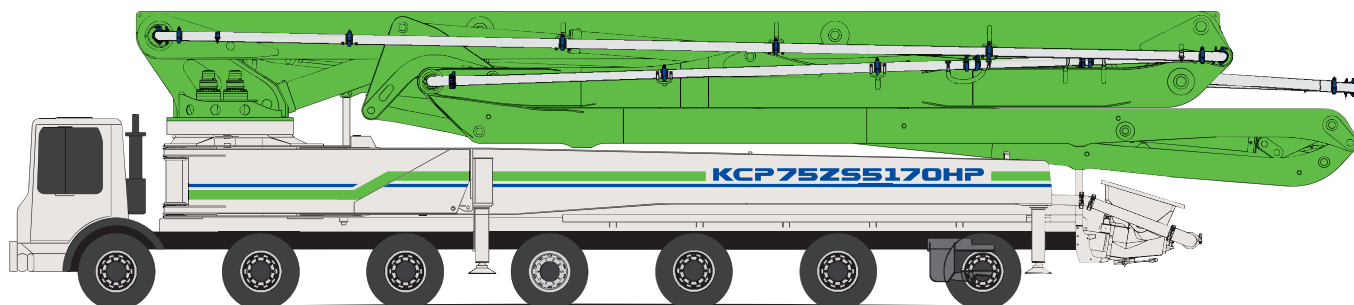

Boom specifications		
Vertical reach	75,1 m	246' 5"
Horizontal reach	71.9 m	235' 10"
Reach from front of truck	68,6 m	225' 1"
Unfolding height	18,3 m	60'
Section articulation	92°/180°/200°/180°/200°	
Rotation	370°	
Delivery line	125 mm	5"
Proportional boom	Yes	
End hose length	3,5 m	11' 6"
Outrigger spread-front	15,1 m	49' 6"
Outrigger spread-rear	14,8 m	48' 7"
Max. outrigger weight	57,000 kg	125,663 lb

Pump specifications		
Maximum output	170 m³/h	222 yd³/h
Concrete cylinder	Ø230 × 2100	9" × 83"
Stroke per minute	32	
Concrete pressure	110 bar	1,595 psi
Hopper capacity	0,6 m³	21 ft³
S-tube	Ø220 × Ø180	9" × 7"
Hydraulic pump	200+200 cc/rev	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	40 mm	1,5"

Working diagram

