


KCP20Z

KCP20Z4120

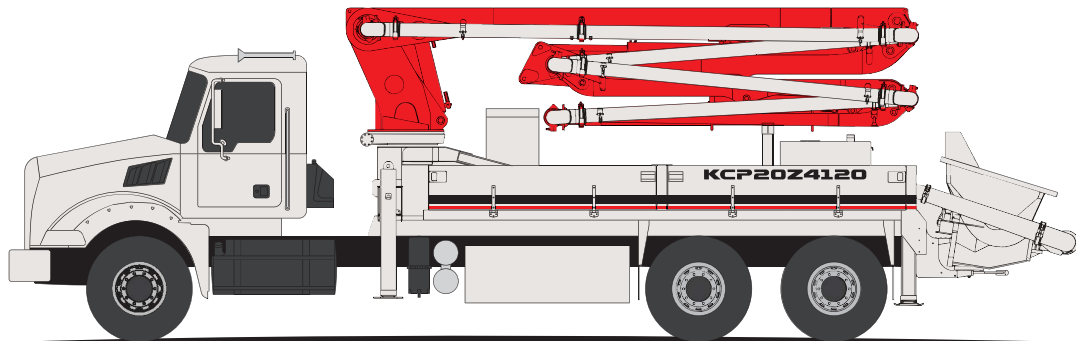

Boom specifications

Vertical reach	19,2 m	63'
Horizontal reach	15,7 m	51' 5"
Reach from front of truck	11,7 m	38' 5"
Unfolding height	4,1 m	13' 7"
Section articulation	91°/180°/230°/250°	
Rotation	370°	
Delivery line	125 mm	5"
Proportional boom	Yes	
End hose length	3,0 m	9' 10"
Outrigger spread-front	3,0 m	9' 10"
Outrigger spread-rear	2,6 m	8' 6"
Max. outrigger weight	9,000 kg	19,842 lb

Pump specifications

Maximum output	120 m ³ /h	157 yd ³ /h
Concrete cylinder	Ø230 × 1800	9" × 71"
Stroke per minute	27	
Concrete pressure	95 bar	1,378 psi
Hopper capacity	0,6 m ³	21 ft ³
S-tube	Ø220 × Ø180	9" × 7"
Hydraulic pump	140+140 cc/rev	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	40 mm	1,5"

Working diagram

