


KCP37ZX

KCP37ZX5120

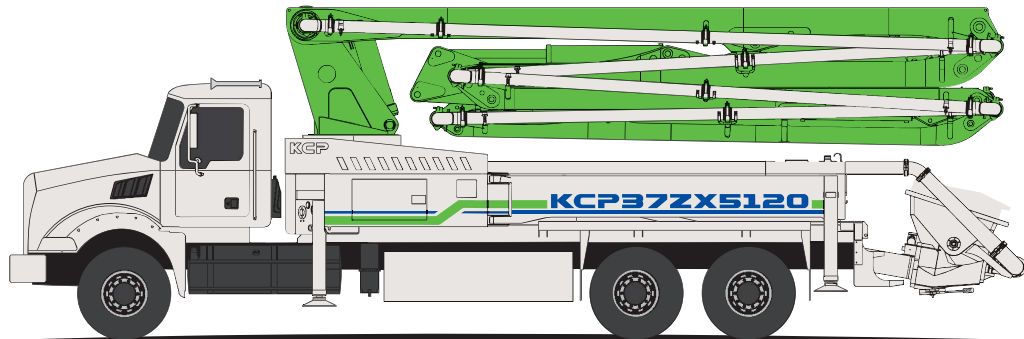




Boom specifications

Vertical reach	36,3 m	119' 4"
Horizontal reach	32.1 m	105' 4"
Reach from front of truck	29,1 m	95' 6"
Unfolding height	7,3 m	23' 11"
Section articulation	92°/180°/235°/180°/245°	
Rotation	370°	
Delivery line	125 mm	5"
Proportional boom	Yes	
End hose length	3 m	9' 10"
Outrigger spread-fron	5,6 m	18' 5"
Outrigger spread-rear	6,7 m	22'
Max. outrigger weight	17,500 kg	38,580 lb

Pump specifications

Maximum output	120 m³/h	157 yd³/h
Concrete cylinder	Ø230 × 1800	9" × 71"
Stroke per minute	27	
Concrete pressure	95 bar	1,378 psi
Hopper capacity	0,6 m³	21 ft³
S-tube	Ø220 × Ø180	9" × 7"
Hydraulic pump	140+140 cc/rev	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	40 mm	1,5"

Working diagram

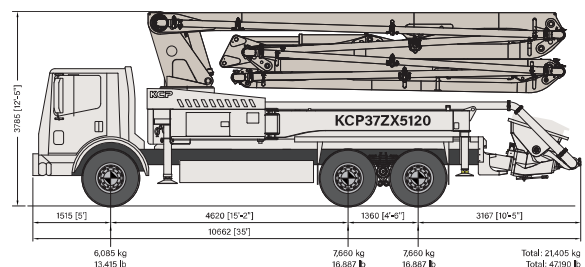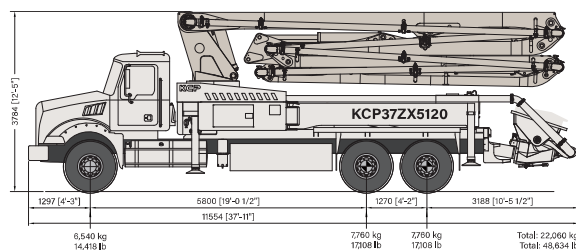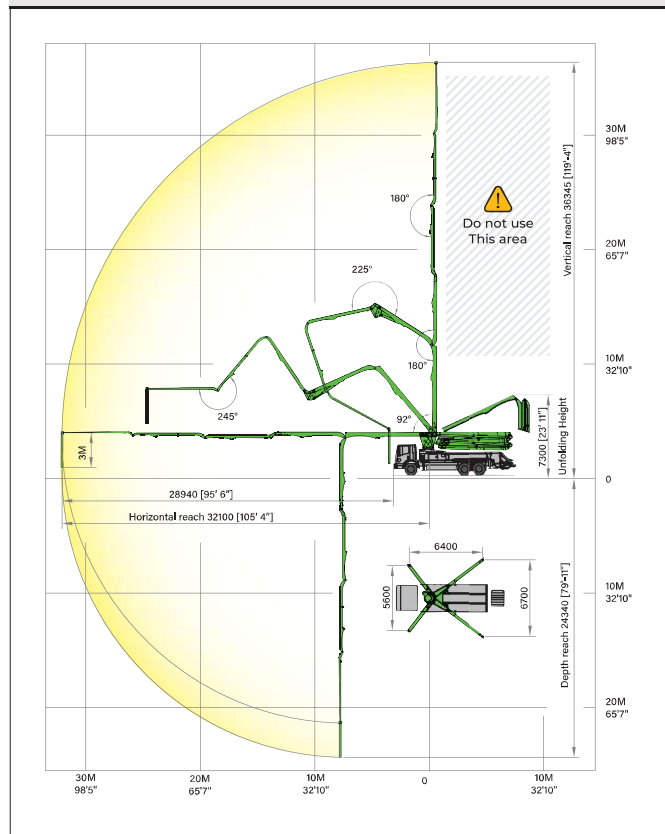

- Photos and drawings are for illustrative purpose only, / • Right to make technical amendments reserved, / • Both Rexroth and Kawasaki pump cell available.
- Dimension will vary with different truck makes, models and specifications. / • Maximum theoretical values listed.