


KCP38ZX

KCP38ZX4170

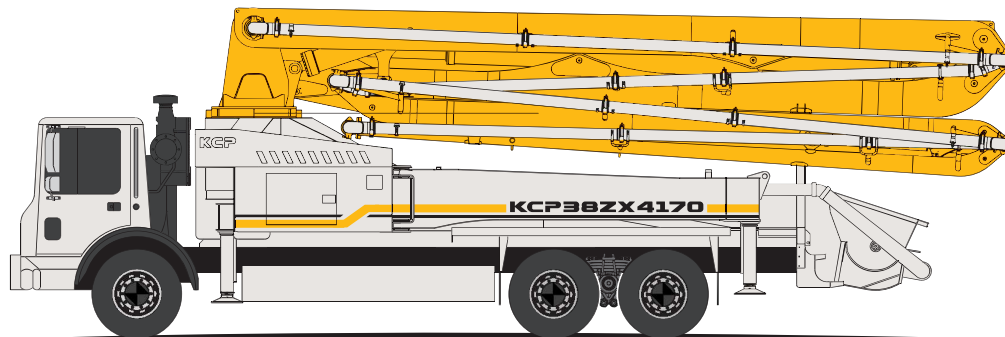




Boom specifications

Vertical reach	37,3 m	122' 6"
Horizontal reach	33.2 m	109'
Reach from front of truck	30,1 m	98' 10"
Unfolding height	9,1 m	29' 11"
Section articulation	92°/180°/250°/245°	
Rotation	370°	
Delivery line	125 mm	5"
Proportional boom	Yes	
End hose length	3,5 m	11' 6"
Outrigger spread-front	6,2 m	20' 4"
Outrigger spread-rear	7,2 m	23' 8"
Max. outrigger weight	23,500 kg	51,810 lb

Pump specifications

Maximum output	170 m³/h	222 yd³/h
Concrete cylinder	Ø230 × 2100	9" × 83"
Stroke per minute	33	
Concrete pressure	95 bar	1,377 psi
Hopper capacity	0,6 m³	21 ft³
S-tube	Ø220 × Ø180	9" × 7"
Hydraulic pump	200+200 cc/rev	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	40 mm	1,5"

Working diagram

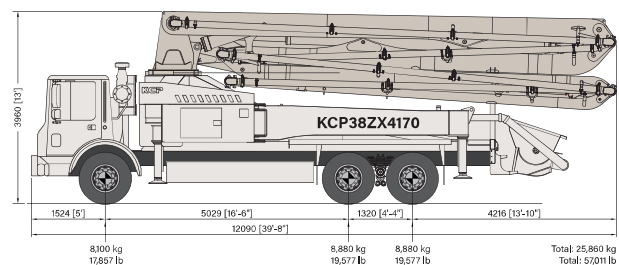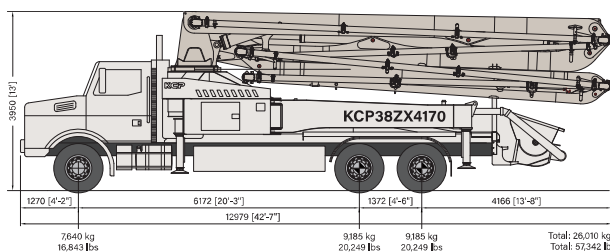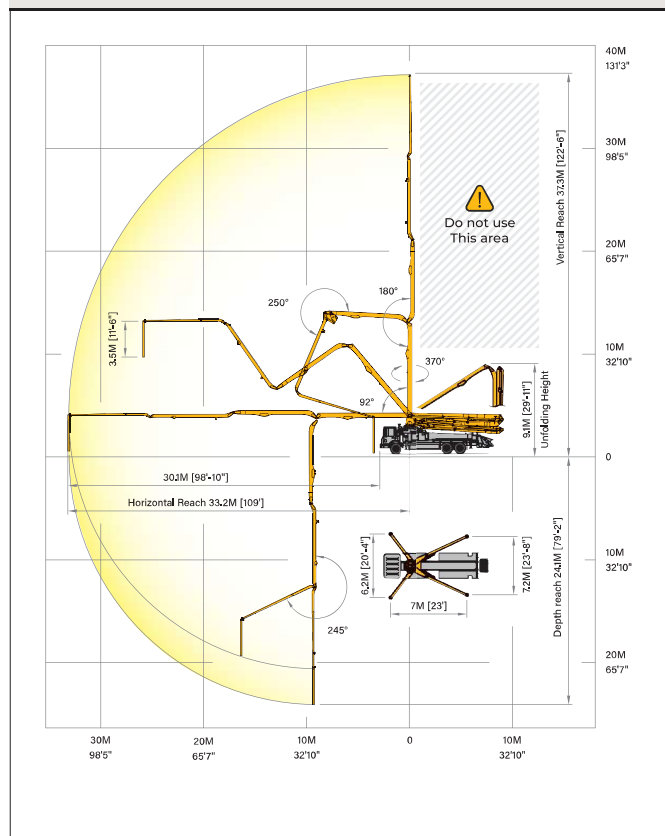

- Photos and drawings are for illustrative purpose only, / • Right to make technical amendments reserved, / • Both Rexroth and Kawasaki pump cell available.
- Dimension will vary with different truck makes, models and specifications. / • Maximum theoretical values listed.