




KML1310

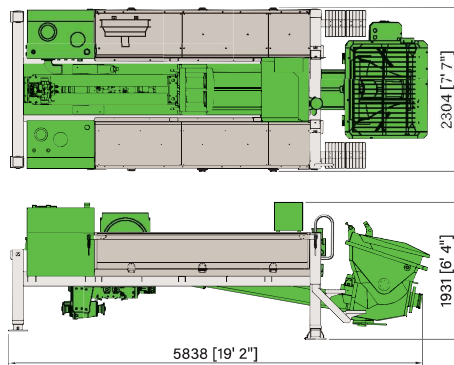


Specifications		
Maximum output	64 m ³ /h	84 yd ³ /h
Concrete pressure	126 bar	1,827 psi
Stroke per minute	24	
Main cylinder	Ø120 / Ø70 × 1400ST	Ø4,72" / Ø2,76" × 55,1" ST
Concrete cylinder	Ø200 × 1400ST	Ø7,87" × 55,1" ST
Hopper capacity	0.6 m ³	21.2 ft ³
S-tube	Ø200 × Ø180	Ø7,87" × Ø7,09"
Hydraulic pump	200 cc/rev	
Truck rpm	1550 rpm	
Max, aggregate size	40 mm	1,57"
Vertical distance	180 m	591 ft
Horizontal distance	315 m	1,033 ft

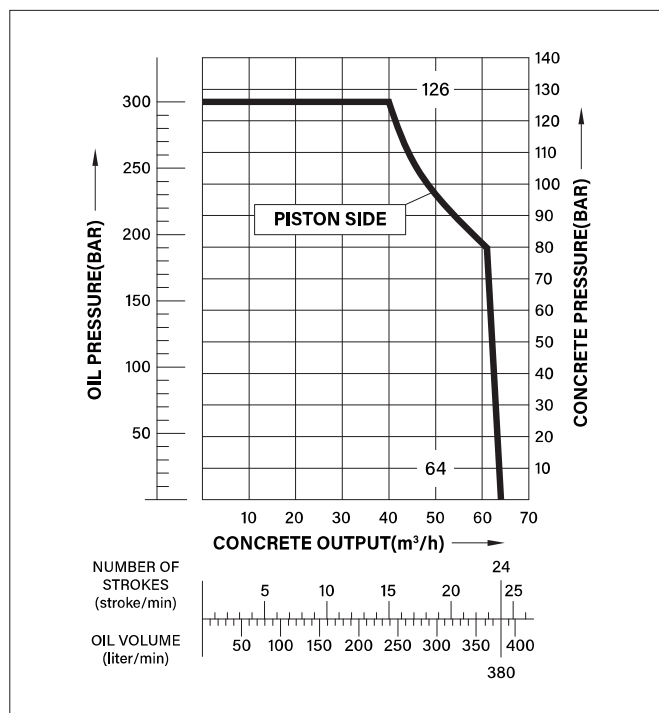

KML1714

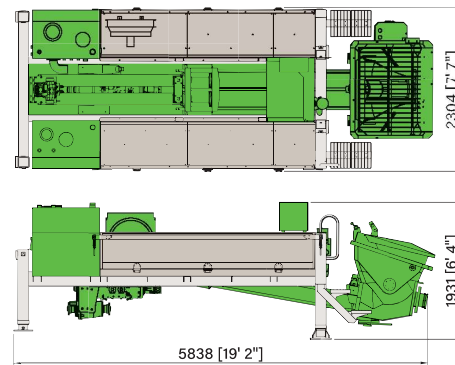

Specifications		
Maximum output	88 m ³ /h	115 yd ³ /h
Concrete pressure	172 bar	2,494 psi
Stroke per minute	26	
Main cylinder	Ø140 / Ø80 × 1800ST	Ø5,51" / Ø3,15" × 70,9" ST
Concrete cylinder	Ø200 × 1800ST	Ø7,87" × 70,9" ST
Hopper capacity	0.6 m ³	21.2 ft ³
S-tube	Ø200 × Ø180	Ø7,87" × Ø7,09"
Hydraulic pump	200+200 cc/rev	
Truck rpm	1550 rpm	
Max, aggregate size	40 mm	1,57"
Vertical distance	240 m	787 ft
Horizontal distance	425 m	1,394 ft

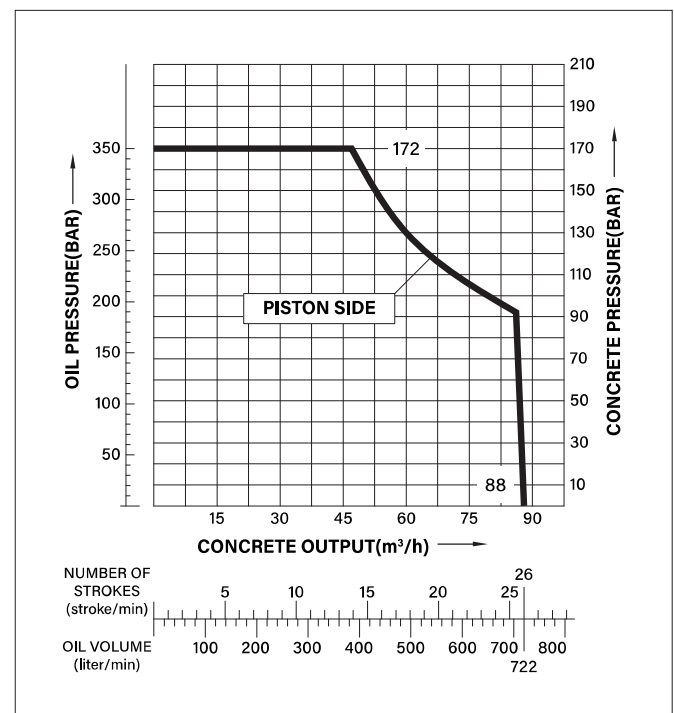

• Photos and drawings are for illustrative purpose only. / • Right to make technical amendments reserved. / • Both Rexroth and Kawasaki pump cell available.
 • Dimension will vary with different truck makes, models and specifications. / • Maximum theoretical values listed.