



KML2210

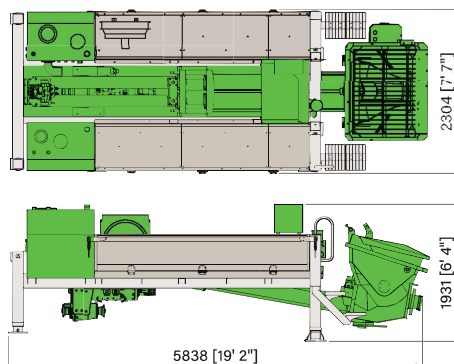


Specifications

Maximum output	68 m ³ /h	89 yd ³ /h
Concrete pressure	224 bar	3,249 psi
Stroke per minute	20	
Main cylinder	Ø160 / Ø90 × 1800ST	Ø6,30" / Ø3,54" × 70,9" ST
Concrete cylinder	Ø200 × 1800ST	Ø7,87" × 70,9" ST
Hopper capacity	0.6 m ³	21.2 ft ³
S-tube	Ø200 × Ø180	Ø7,87" × Ø7,09"
Hydraulic pump	200+200 cc/rev	
Truck rpm	1550 rpm	
Max. aggregate size	40 mm	1,57"
Vertical distance	240 m	787 ft
Horizontal distance	425 m	1,394 ft

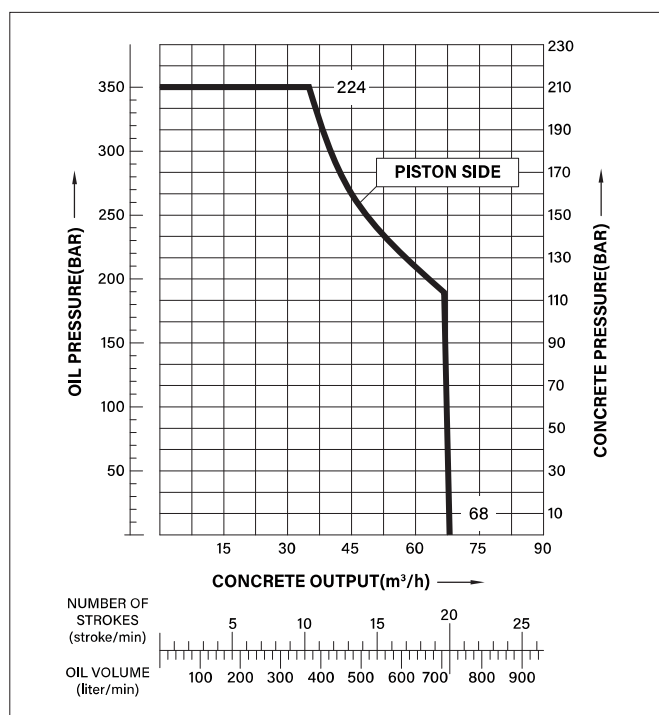

KML2812

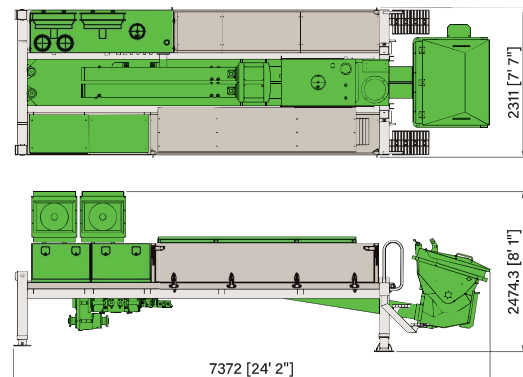

Specifications

Maximum output	95 m ³ /h	124 yd ³ /h
Concrete pressure	224 bar	3,249 psi
Stroke per minute	24	
Main cylinder	Ø160 / Ø90 × 2100ST	Ø6,30" / Ø3,54" × 82,7" ST
Concrete cylinder	Ø200 × 2100ST	Ø7,87" × 82,7" ST
Hopper capacity	0.6 m ³	21.2 ft ³
S-tube	Ø200 × Ø150	Ø7,87" × Ø5,91"
Hydraulic pump	280+280 cc/rev	
Truck rpm	1550 rpm	
Max. aggregate size	40 mm	1,57"
Vertical distance	320 m	1,050 ft
Horizontal distance	560 m	1,837 ft

