


KML2812 (Engine Type)



Specifications		
Maximum output	120 m ³ /h	157 yd ³ /h
Concrete pressure	224 bar	3,249 psi
Stroke per minute	28	
Main cylinder	Ø160 / Ø90 × 2100ST	Ø6.30" / Ø3.54" × 82.7" ST
Concrete cylinder	Ø200 × 2100ST	Ø7.87" × 82.7" ST
Hopper capacity	0,6 m ³	21,2 ft ³
S-tube	Ø200×Ø150	Ø7.87" × Ø5.91"
Hydraulic pump	280+280 cc/rev	
Engine / HP	CAT-C7.1 / 300 HP	
Engine rpm	1500 rpm	
Truck RPM	1550 rpm	
Hydraulic pump (Engine)	140+140 cc/rev	
Max. aggregate size	40 mm	1.57"
Vertical distance	320 m	1,050 ft
Horizontal distance	560 m	1,837 ft

Performance diagram

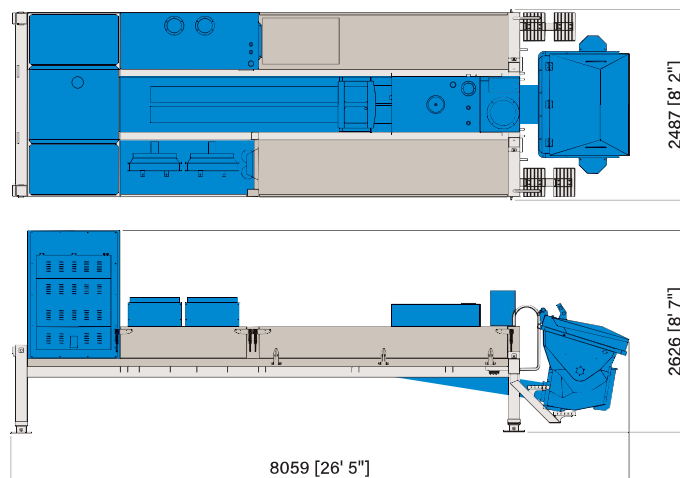