


KTP1905

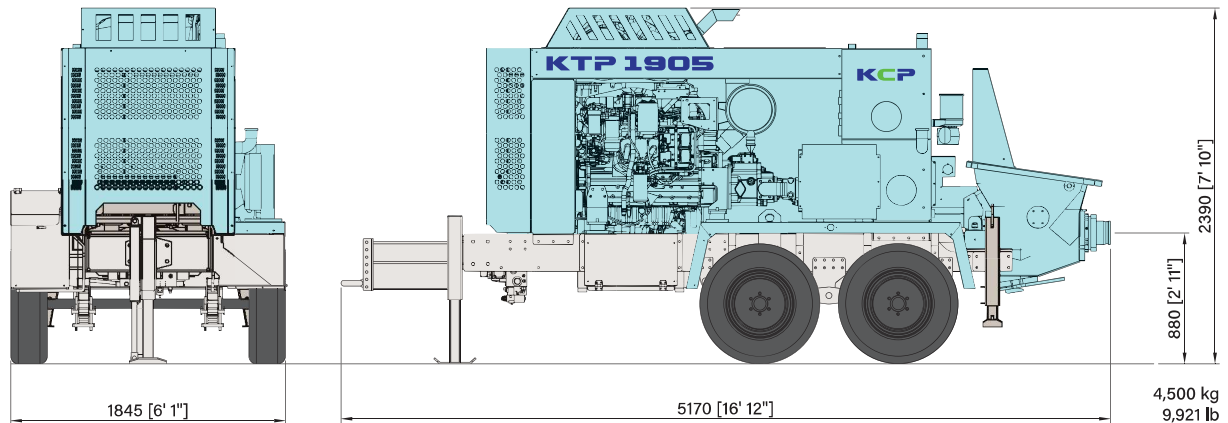


Specifications

Model	KTP 1905-7"		KTP 1905-6"	
Maximum output	61 m ³ /h	80 yd ³ /h	42 m ³ /h	55 yd ³ /h
Concrete pressure	130 bar	1,885 psi	188 bar	2,727 psi
Stroke per minute	36		36	
Main cylinder	Ø110 / Ø63 × 1100ST	Ø4.33" / Ø2.48" × 43.3" ST	Ø110 / Ø63 × 1100ST	Ø4.33" / Ø2.48" × 43.3" ST
Concrete cylinder	Ø180 × 1100ST	Ø7.09" × 43.3" ST	Ø150 × 1100ST	Ø5.91" × 43.3" ST
Hopper capacity	0,4 m ³	14,1 ft ³	0,4 m ³	14,1 ft ³
S-tube	Ø180 × Ø120	Ø7.09" × Ø4.72"	Ø180 × Ø120	Ø7.09" × Ø4.72"
Max. aggregate size	40 mm	1,57"	40 mm	1,57"
Hydraulic pump	200 cc/rev		200 cc/rev	
Engine	CAT-C7.1 (STAGE5) 225 kW / 301 HP		CAT-C7.1 (STAGE5) 225 kW / 301 HP	
Engine rpm	1900 rpm		1900 rpm	
Vertical distance	185 m	607 ft	265 m	869 ft
Horizontal distance	325 m	1,066 ft	470 m	1,542 ft

Performance diagram

KTP 1905-7"

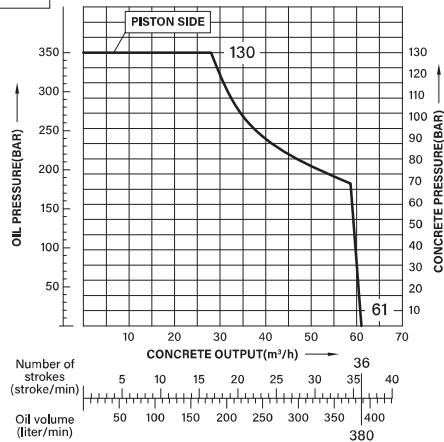

KTP 1905-6"

