


KTP2812



Specifications		
Maximum output	105 m ³ /h	137 yd ³ /h
Concrete pressure	225 bar	3,263 psi
Stroke per minute	31	
Main cylinder	Ø160 / Ø90 × 1800ST	Ø6.30" / Ø3.54" × 70.9" ST
Concrete cylinder	Ø200 × 1800ST	Ø7.87" × 70.9" ST
Hopper capacity	0,6 m ³	21,2 ft ³
S-tube	Ø200 × Ø150	Ø7.87" × Ø5.91"
Max. aggregate size	40 mm	1.57"
Hydraulic pump	280+280 cc/rev	
Engine	CAT-C18 (630 HP)	
Engine rpm	2000 rpm	
Vertical distance	320 m	1,050 ft
Horizontal distance	560 m	1,837 ft

Performance diagram

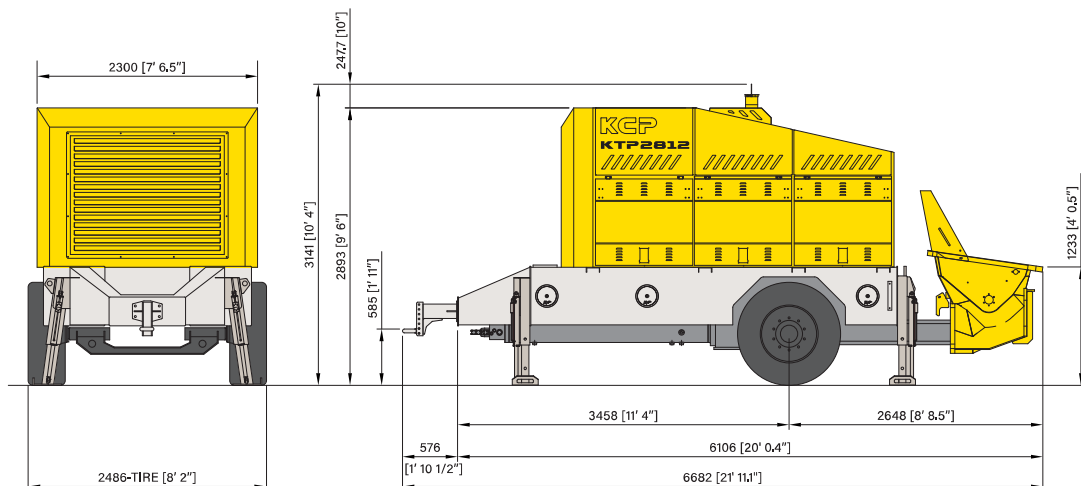