


LUBRICATION SPEC SHEET

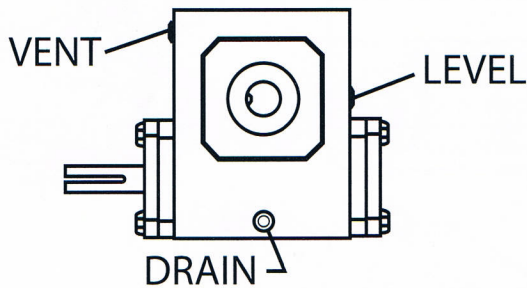

OIL CAPACITY - 8 PINTS

Smallline gear box is shipped from factory with synthetic lubricant, MOBILE SHC 634. (Do NOT mix synthetic lubricant with other oil. Oil in the gear box should be changed every 2500 hrs.) Frequently check the oil lever of the gear box. If oil level is low, add proper lubrication through the vent plug until it comes out the oil level.

The precision-made gears and bearings in Smallline gear boxes require high-grade lubricants of the proper viscosity to maintain trouble-free performance. For best results, use lubricants on the follow chart for worm gear reducers:

Manufacturer	50° to 125° F Ambient Temperature AGMA Compounded No. 8
Amoco Oil Co.	Cylinder Oil #680
Chevron USA, Inc.	Cylinder Oil #680X
Exxon Co. USA	Cylesstic TK-680
Gulf Oil Co.	Senate 680D
Mobile Oil Corp.	Extra Hecla Super
Shell Oil Co.	Valvata Oil J680
Sun Oil Co.	Gear Oil 8C
Texaco	650T Cylinder Oil
Union Oil Co. of CA	Worm Gear Lube 140