



DT-7000

**i21**

Entry Level Cash Dispenser



Compact and ergonomic design



Self-developed core module



High reliability



Convenient maintenance



Value-added services



Easy deployment

i21 is a polished and ergonomic cash dispenser that offers high performance with ultra-low investment. i21 is not only a super-compact facility that perfectly fits in retail environment, but also a reliable ATM to comply with banking level requirements, including security features such as EMV, PCI EPP, UL, 3DES, ADA, etc. Wide value-added service extension and high visibility also make i21 an ideal choice for IAD venues.

# i21 Entry Level Cash Dispenser

## Features

**Minimized TCO:** Small footprint, superb performance and banking level security features significantly reduce cost of operation, service and security labor involved, which generates least total cost of ownership.

**Optimized Design:** ADA standard compliant, wide range of operations, ergonomic and compact design increase customer satisfaction. Optimized security features largely enhance customer confidence.

**Rapid ROI:** Configurable large topper screen and a long list of value-added services provide a broad range of scalability in a small footprint, which offers an ideal advertising channel and enhance revenue-generation for ATM owners.

## Specifications

### Controlling Unit

- Intel® Atom™ J1900 quad-core 2.0G CPU
- 4G RAM, 128G SSD
- Windows® 7 or Windows® 10

### Banknote Processing Unit

- Dispenser:
  - Up to 5 notes per second
  - Up to 3 dispensing cassettes
- Cassette capacity: up to 2,200 notes\*
- Reject capacity: up to 200 notes

### Customer Interfaces

- Display:
  - 15" LCD touch screen
  - Privacy filter (opt.)
- Keypad: Metal 3DES EPP, PCI compliance
- Card reader:
  - DIP card reader
  - Motorized card reader (opt.)
  - Contactless card reader (opt.)
  - EMV compliant
- Receipt printer:
  - 80mm 203DPI graphical thermal printer
  - 1D & 2D barcode scanner (opt.)
- High quality loudspeaker
- ADA headset jack (opt.)

### Communication

- Standard TCP-IP connection

\* The actual capacity is subject to the thickness and fitness of local currency.

### Security



- Physical:
  - UL291 Business Hour safe
  - Built-in anti-skimming (opt.)
  - EMV certified
  - Electronic lock
  - Mechanical combination lock (opt.)
  - PCI compliant EPP
- Surveillance Solution (conditionally opt.)
  - USB/DVR surveillance system
  - Transaction image/video capture
  - User face image/video capture

### Dimensions & Weight

- Without Topper
  - H\*W\*D: 1310mm\*410mm\*610mm
  - Weight: 128kg
- With Topper (opt.)
  - H\*W\*D: 1596mm\*410mm\*610mm
  - Weight: 133kg

### Working Environment

- Temperature: 32°F (0°C) to 104°F (40°C)
- Relative humidity:
  - 20% to 95% (non-condensing)

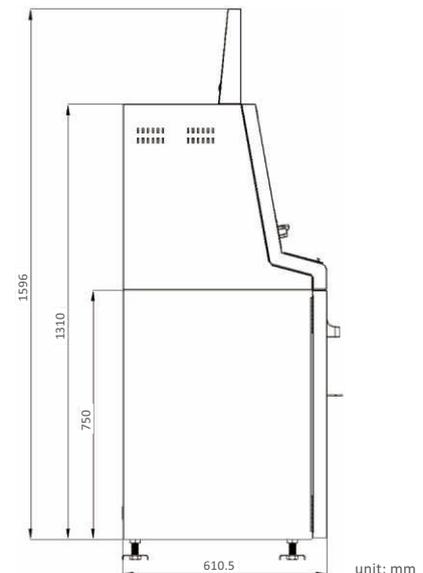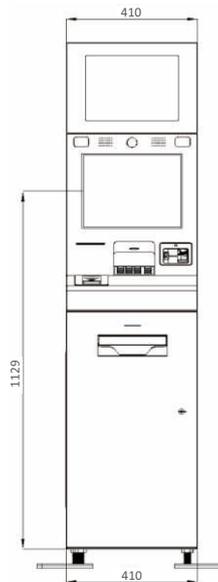

## GRGBanking Equipment Co., Ltd.

9,11 Kelin Road, Science City, High-tech Industrial Development Zone,  
Guangzhou, China 510663  
Tel: +86-20-6287 8545  
Fax: +86-20-6287 9976  
E-mail: atm@grgbanking.com

Specifications are subject to update without prior notice.  
Please consult GRGBanking or its representative for the latest information.