






DT-7000 **158** Compact Cash Recycler

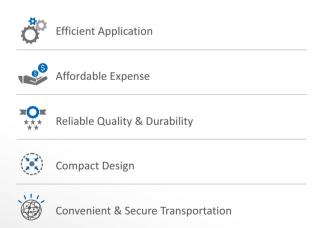

i58 Cash Recycler is a newly designed Cash Recycler developed by GRGBanking. Featured with cost-effectiveness, high-security, improved stability by using brand-new Cash Processing Module, i58 meets various cash processing demands by enhancing human-computer interaction and user experience.

58 Compact Cash Recycler

Features

Full Functionality & Leading Technology: Cash recycling for multi-denominations Full image scanning of banknotes with 50% faster processing speed by new cash processing module.

Flexible Deployment & Easy Maintenance: Compact size, 40% less floor space, more flexible to deploy. Visual guidance interface for maintenance, easy to identify problem and operate.

Comprehensive Security Design: Fully monitored and recorded the cash loading process. Banknote Series Number Tracking System, fast locate suspicious banknotes. Anti-skimming Card Reader.

Specifications

Controlling Unit

- Embedded X86 platform
- 4G Memory
- 500G HDD (opt. 1G SSD)
- Windows[®] 7

Banknote Processing Unit

- Cash recycler: 8 notes/sec for processing
- Bulk cash processing: Max.300 notes per transaction
- Capacity:

-2 dual recycling cassette (1,800 notes each);

- -1 acceptance cassette (2,850 notes)
- Support note retract & reject (opt.)
- 3 dual recycling cassette (opt.)

Customer Interfaces

• Display:

-15" TFT touch screen, privacy filter(opt.)

- Card reader:
 - -Support IC card/ Magcard; -Motorized Card reader PS (opt.) -RF card (opt.)
- Receipt Printer: -Mini thermal printer; -support graphic/ASCII
- Keypad:
 - -EPP:

-Dust proof/water proof/vandal resistant

- Fingerprint reader (opt.)
- 2D barcode scanner (opt.)

Communication

- Standard TCP-IP connection
- Support Ethernet/LAN, wireless 3G or 4G








GRGBanking Equipment Co., Ltd. 9,11 Kelin Road, Science City, High-tech Industrial Development Zone,

Guangzhou, China 510663 Tel: +86-20-6287 8545 Fax: +86-20-6287 9976 E-mail: atm@grgbanking.com

- Height: 63.2 in. (1605mm) Width: 17.7 in. (450mm)
- Depth: 27.2 in. (690mm) Weight: 255kg

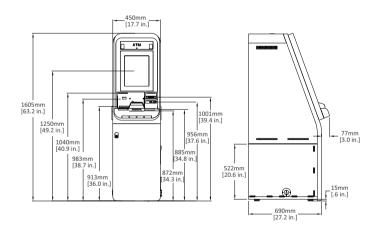

*The actual capacity is subject to the thickness and fitness of local currency.







Specifications are subject to update without prior notice. Please consult GRGBanking or its representative for the latest information.

Copyright © 2018 by GRGBanking Equipment Co., Ltd. All rights reserved.

www.GRGBanking.com



- Split type double mechanical combination lock
- Standard UL291 Level 1 safe
- Electronic combination lock (opt.)
- DVR surveillance system (opt.)
- UPS (opt.)

Working Environment

- Temperature:
 - Indoor: 32°F(0 °C) to 104°F(40°C)
- Relative humidity: 20% to 95% non-condensing

Dimensions & Weight