



DT-7000

**i58**

**Compact Cash Recycler**



Efficient Application



Affordable Expense



Reliable Quality & Durability



Compact Design



Convenient & Secure Transportation

i58 Cash Recycler is a newly designed Cash Recycler developed by GRGBanking. Featured with cost-effectiveness, high-security, improved stability by using brand-new Cash Processing Module, i58 meets various cash processing demands by enhancing human-computer interaction and user experience.

# i58 Compact Cash Recycler

## Features

**Leading Technology:** With the latest generation cash recycling module with new platform validator, i58 supports high speed cash processing and accurate validation under high reliability.

**Flexible Deployment & Maintenance:** Compact size, 2 pieces of A3 paper size floor space. Visual guidance interface for maintenance, convenient to locate problems.

**Comprehensive Security:** Full-range surveillance system, anti-skimming card reader, EMV certified and PCI compliant EPP, and other hardware and software protections form all-round security.

## Specifications

### Controlling Unit

- Embedded X86 platform
- 4G Memory
- 500G HDD (opt. 1THD)
- Windows® 7/10

### Banknote Processing Unit

- Deposit & dispensing speed: up to 10 notes per second
- Bundle capacity: max. 300 notes per transaction
- Maximum of 4 cassettes
  - 2 Dual-Recycling Cassettes: max. 1,800 notes (600/1,200) for each
  - 1 acceptance cassette: max. 2,850 notes
  - 1 retract bin: max. 500 notes

(The Dual-Recycling Cassette has two recycling compartments inside, which can accept 600 and 1,200 notes respectively.)

### Customer Interfaces

- Display:
  - 15" TFT touch screen, privacy filter(opt.)
- Card reader:
  - Support IC card/ Magcard;
  - Motorized Card reader PS (opt.)
  - RF card (opt.)
- Receipt Printer:
  - 80mm graphic thermal receipt printer
  - support graphic/ASCII
- Keypad:
  - Tactile 4\*4 alphanumeric keypad
  - Dust proof/water proof/vandal resistant
- Fingerprint reader (opt.)
- Barcode and QR code scanner (opt.)

\*The actual capacity is subject to the thickness and fitness of local currency.

### Communication

- Standard TCP-IP connection
- Support Ethernet/LAN, wireless 3G or 4G

### Security


- Split type double mechanical combination lock
- Standard UL291 Level 1 safe
- Electronic combination lock (opt.)
- DVR surveillance system (opt.)
- UPS (opt.)

### Working Environment

- Temperature:
  - Indoor: 32°F(0 °C) to 104°F(40°C)
- Relative humidity: 20% to 95% non-condensing

### Dimensions & Weight

- Height: 63.2 in. (1605mm) Width: 17.7 in. (450mm)
- Depth: 27.2 in. (690mm) Weight: 255kg

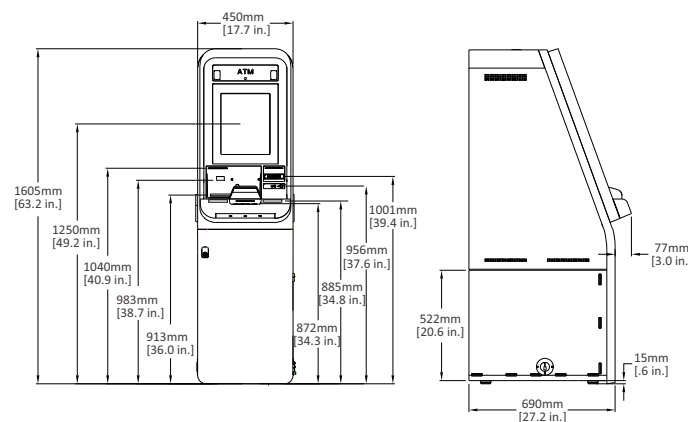

### GRGBanking Equipment Co., Ltd.

9,11 Kelin Road, Science City, High-tech Industrial Development Zone,  
Guangzhou, China 510663  
Tel: +86-20-6287 8545  
Fax: +86-20-6287 9976  
E-mail: atm@grgbanking.com

Copyright © 2019 by GRGBanking Equipment Co., Ltd.  
All rights reserved.

Specifications are subject to update without prior notice.  
Please consult GRGBanking or its representative for the latest information.