



# Gfp

Graphic Finishing  
partners

Where Finishing Comes First.

## Gfp 663TH Production Top Heat Laminator

Gfp's most advanced laminator with "Smart Finishing Technology"  
for the demanding Wide Format Finishing Professional.

DIGITAL MICROCONTROLLER SYSTEM  
COLOR GRAPHIC OPERATIONAL DISPLAYS  
ELECTRONIC ROLLER GAP/ PRESSURE CONTROL  
SWINGOUT UNWIND AND REWIND SHAFTS  
INLINE ROTARY SIDE SLITTERS  
TOP ROLLER HEAT ASSIST  
INTEGRATED REAR REWIND  
ROLL LABEL PRINTER  
OPERATOR WARNING ALERTS  
ONBOARD OPERATOR HELP TUTORIALS



### FEATURING...

#### Touchscreen User Interface


10" tablet style LCD Display for user-friendly access to all functions

Minimize Waste - Boost Profits - Drive Continuous Improvement - Increase Quality - Reduce Costs  
Expand Expertise - Improve efficiency - Improve accuracy - Save time - Improve repeatability - Perform faster

# 663TH

## Operational Displays

Microprocessor technology has expanded capabilities for Wide Format Finishing Professionals by increasing the efficiency, accuracy and reliability of finishing equipment. But that's not all. Now operators can program, monitor and display all machine functions and view operator tutorials through a powerful digital touchscreen Micro-controller. As a result, the Gfp 663TH expands operator expertise, productivity and accuracy providing consistent quality output and fewer production errors.

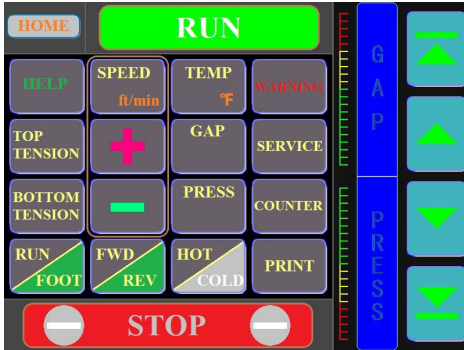


### HOME SCREEN

displays machine status and links operator to operational screens for quick, efficient access to system setup and adjustments.




### OPERATIONAL DISPLAYS

provide instant access for setting and adjusting the operating parameters of each machine function for accuracy, ease, and speed.

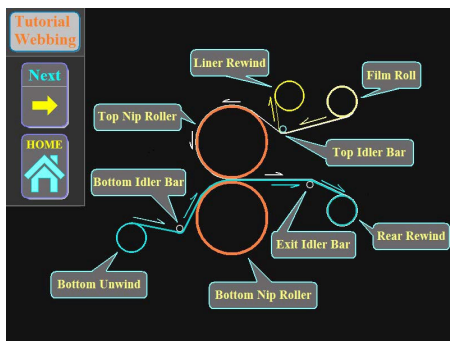


### HELP TUTORIALS

are visual guides that improve comprehension and retention enhancing employee productivity, proficiency, and confidence.

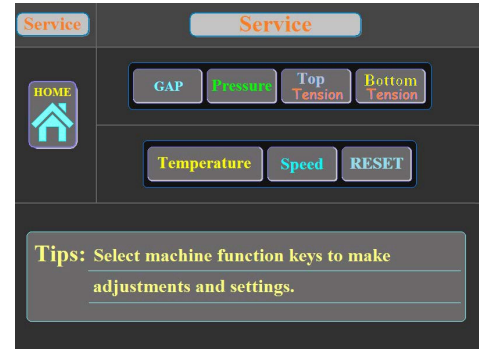


### SERVICE DISPLAYS

allow fine-tune adjustments and calibrations to operating parameters to increase efficiency and reduce waste.

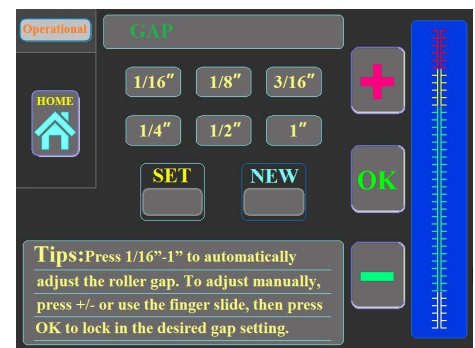

### ELECTRIC SERVO MOTOR ROLLER GAP DRIVE AND ENCODER

provides precise and repeatable roller gap position to improve accuracy and efficiency.

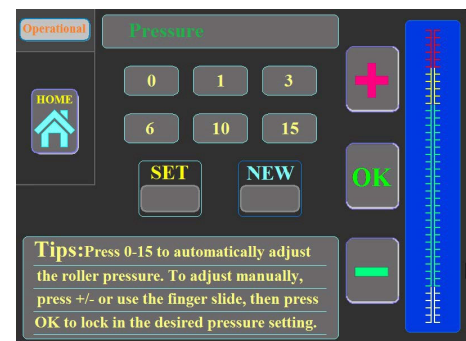

### DIGITAL ROLLER PRESSURE DISPLAY

provides easy reference and adjustment for fast, repeatable roller pressure to ensure flat, quality output.



Where  
Finishing  
Comes  
First.

## 663TH

### Built-in Professional Features


Along with its rugged design and many built-in labor-saving features, the 663TH's electric servo motor and positioning encoder deliver precise control of roller gap position and nip pressure. A host of production class features like integrate rear rewind, inline slitting, and swingout shafts provide the reliable performance the finishing professionals need to ensure the highest quality output and maximum productivity.



**INTEGRATED REAR REWIND**  
is motorized for longer,  
uninterrupted roll-to-roll operation.



**TOP HEAT ASSIST**  
softens film adhesive to reduce  
silvering for better quality output  
and to shorten processing time.

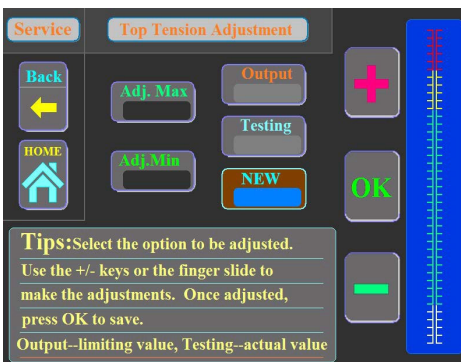

**FILM TENSION SENSOR**  
is an adjustable alarm that alerts  
operator to excess web tension  
ensuring flat, error free output.



Where  
Finishing  
Comes  
First.



**THREE SWINGOUT SHAFTS**  
save time loading and unloading rolls  
for faster setup and change-overs



**ROLL LABEL PRINTER**  
generates pressure sensitive label with  
film description and remaining footage  
for labeling partial film rolls.



**INLINE ROTARY SLITTERS**  
trim the sides of output during  
lamination to save time and increase  
productivity.




## TECHNICAL OVERVIEW

### Gfp 663TH Professional Top Heat Laminator

Description	663TH
<i>Laminating Width</i>	63"
<i>Roller Diameter</i>	5"
<i>Roller Gap</i>	1"
<i>Main Rollers</i>	Silicone
<i>Supply Roll Diameter (Max)</i>	8" OD (top); 16" OD (bottom)
<i>Supply Shafts</i>	2 Swing-out
<i>Rewind Shafts</i>	2 (1 Swing-out)
<i>Rear rewind</i>	Included
<i>Rear Inline Slitters</i>	Rotary Design
<i>Maximum temperature</i>	140°F
<i>Heat method</i>	Metal Alloy heater
<i>Film Core Size</i>	3"
<i>Laminating speed</i>	0-20 ft/min
<i>Pressure adjustment</i>	Electric Servo Motor
<i>Output Height</i>	38"
<i>Foot Pedal</i>	Included
<i>Stand with casters</i>	Included
<i>Power Supply</i>	120v 12A
<i>Power Consumption</i>	1440W
<i>Net Weight with stand</i>	675 lbs.
<i>Dimensions (W x D x H)</i>	83" x 30.7" x 63"
<i>Shipping Weight</i>	908 lbs.
<i>Shipping Dimensions ( W x D x H)</i>	89" x 35" x 59"

**Warranty:** 1 year parts & labor.  
*Installation is available.*



Bullseye Graphics  
 1085 Stark Road Starkville, MS 39759  
 Phone: (662) 273-3626  
[sales@bullseye-graphics.com](mailto:sales@bullseye-graphics.com)